



Sternberg Lighting

ESTABLISHED 1923 / EMPLOYEE OWNED

GENESIS Product Configurator


Catalog Number: 1A-1527LED-R-SV1-4ARC35T2-MDL03-EZ/OAPT/450P414/BK Type: _____

Customer Approval: _____

Conceptual assembly drawing, subject to Engineering verification by factory.

Signature _____

Date _____

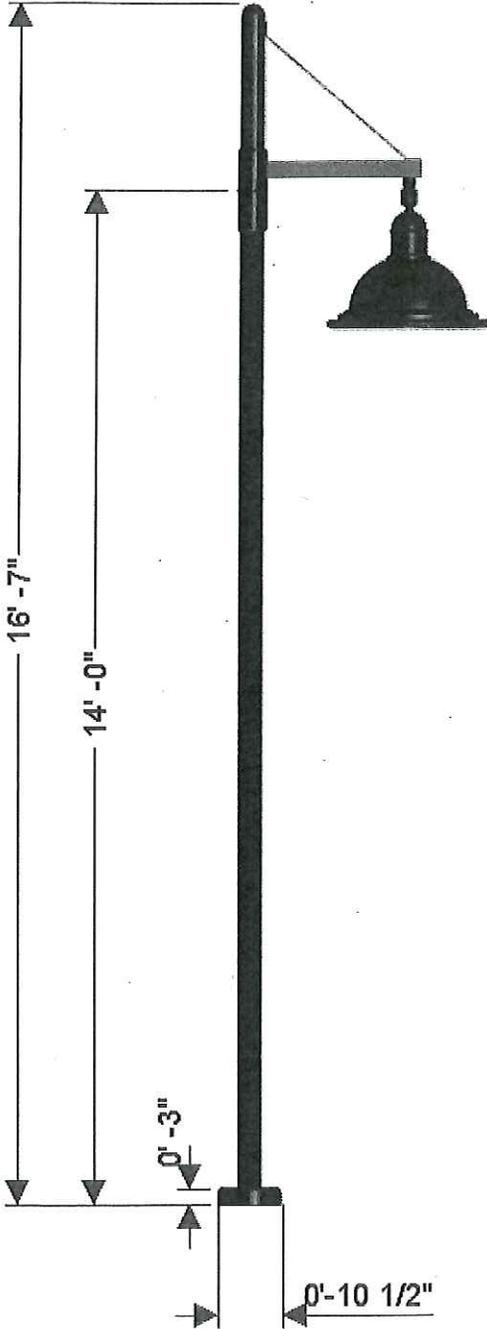

NUMBER OF ARMS: 1

ARM ARM MOUNTED FIXTURE: 1527LED

1527 Omega decorative downlight fixture features a spun aluminum bell styled shade with a flared or rounded edge. An aluminum casting is attached to the upper portion of the bell shade to allow coupling to multiple arms. Fixture features sealed and rotatable optics. Available with flat, sag, clear, or frosted glass.

ARM LIGHT SOURCE: -4ARC35T2-MDL03

Array: 4ARC
 Color Temp: 35
 Distribution: T2
 Driver: MDL03

OPTIONS: -EZ

Hangstraight: EZ


ARM: OAPT

POLE: 450P414/

The 10-1/2" diameter cast aluminum base and aluminum shaft shall be a one-piece construction. For fixtures using remote ballasts or drivers, the servicing of these components requires pulling the pole. The pole shall be U.L. or E.T.L. listed in U.S. and Canada.

FINISH: BK

Assembly shall be powder coated to Black Smooth finish. Prior to coating, the assembly shall be chemically cleaned and etched in a 5-stage washing system which includes alkaline cleaning, rinsing, phosphoric etching, reverse osmosis water rinsing, and non-chrome sealing to ensure corrosion resistance.

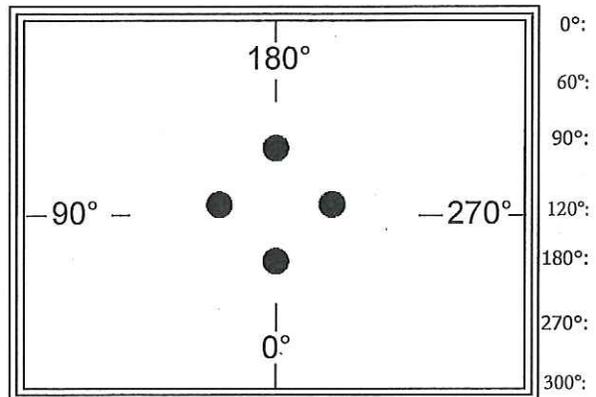

Bolt Info: (4) 1/2" x 18" Anchor Bolts, 8" Bolt Circle, Diamond pattern

A 325

Access Door Orientation: 0°

Street Side Orientation: 180°

Rev	Description	By	Date	Job Name:			Job Location:	
A								
B							Drawing No. 6035	
C							Checked Date:	
D				Drawn By:	Drawn Date:	Checked By:		
E								