


A LANDSCAPE SIGNATURE.

- *Ideal for walls up to 4ft. high.*
- *Taller terraced walls combine beauty and function.*
- *Hand holds provide safe and easy installation.*
- *Dry-stack construction.*
- *Attractive stone texture.*
- *Builds strong and meandering walls with a professional finish.*

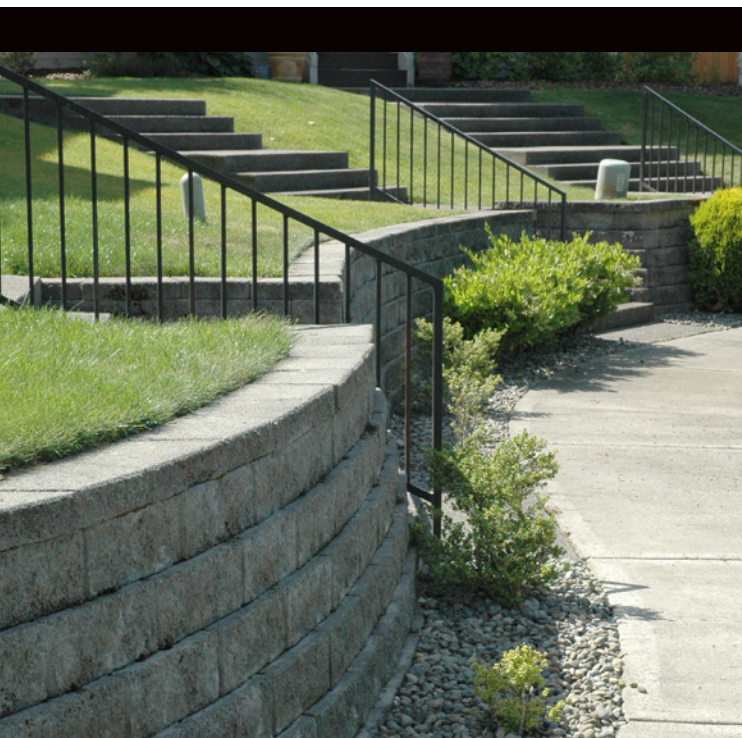

Adding dimension, grace and value to your home and garden.

Install a Jumbo NurseryStone landscape wall in your yard and you'll not only add beauty, you'll also add value. Providing the rugged performance you need and the aesthetics you crave, Jumbo NurseryStone is ideal for landscape walls, terrace walls and meandering borders. The block's natural, rough-hewn appearance and beveled design allow you to create graceful curves and patterns that guide the eye to what lies beyond.

Easily installed. Ideal for walls up to four feet high and taller terrace walls, Jumbo NurseryStone blocks are lightweight and easy to handle. Jumbo NurseryStone's hollow center and unique hand-holds allow you to grip and lift the block with confidence. The mortarless, dry-stack construction makes installation a snap while a snug fit ensures a gap-free, professional finish each and every time.

Ruggedly Reliable. Jumbo NurseryStone is built to last. This natural-looking concrete block doesn't rot like wood, costs less than brick and is easier to build with than stone. That means you can spend hours enjoying rather than maintaining your new and beautiful hardscape.


Sound Value. Economical product, easy and low cost installation, long life and minimal maintenance. Add it all up and you have a high quality product that adds dimension, grace, and value to your home and garden.

To learn more about NurseryStone and how it can help add value to your home and garden, visit www.westblocksystems.com or call 1.800.332.6489.



WESTBLOCK SYSTEMS®


A Landscape Series Product from WestBlock Systems®



70 Pounds
6" H: Height
16" W: Width
12" D: Depth

MAIN BLOCK

Color: Check with your local manufacturer for color options.

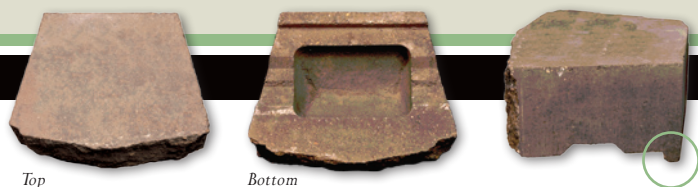

NurseryStone's bottom heel enables the block to hook over the course below, securing the block and providing the proper set-back for a solid, professional finish.

Lightweight block minimizes effort and maximizes results.

What you should know before you begin your project:

1. Soil conditions, land slope and water table will affect final design.
2. A minimum of one-half of the first course of block should be placed below grade line of the soil.
3. 6" Jumbo NurseryStone is typically suitable for walls up to 4 ft. tall. Consult local codes and site conditions to determine your specific limitations.
4. Walls require a minimum of 2" of gravel base.
5. How many blocks do you need? Multiply the square footage of your wall by 1.5. Determine the square footage of your wall by multiplying length x height.

Tools and materials you'll need for your project:

- Shovel
- Wheelbarrow
- Level
- String line
- Hammer
- Wooden stakes
- Hand tamper
- 3/4" minus aggregate is recommended

NurseryStone is a licensed product of WestBlock Systems, Inc. NurseryStone and WestBlock Systems are registered trademarks of WestBlock Systems, Inc. The NurseryStone product is covered under one or more of the following patents: US D433,158, US D435,917 and US D466,288.




WestBlock Systems
P.O. Box 64685 - Tacoma, Washington 98464
1.800.332.6489


How many blocks do you need?

| | | WALL LENGTH | | |
|-------------|----------|-------------|-----------|-----------|
| | | 10' Long | 15' Long | 20' Long |
| WALL HEIGHT | 18" High | 23 Blocks | 34 Blocks | 43 Blocks |
| | 24" High | 30 Blocks | 45 Blocks | 60 Blocks |
| | 30" High | 38 Blocks | 57 Blocks | 75 Blocks |
| | 36" High | 45 Blocks | 68 Blocks | 90 Blocks |


INSTALLATION

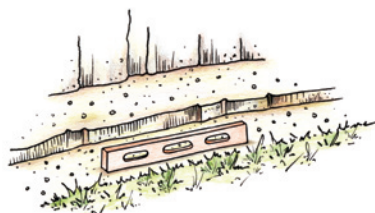


STEP 1: Begin at the lowest elevation. Determine line and height of wall. Dig a trench 6" deep and 12" wide. Fill the trench halfway with level, compacted gravel.

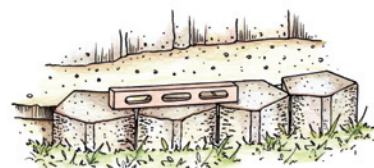


STEP 2: Install first course of blocks. Check for level side-to-side and front-to-back. Fill between and behind the blocks with gravel. Brush excess gravel from top of blocks.

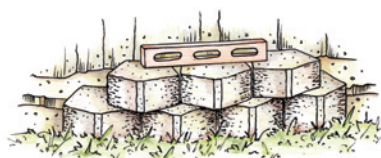

STEP 3: Position next course of blocks on top of the first course, utilizing the cross bond pattern.

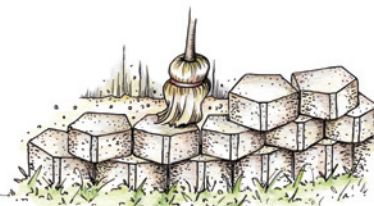

STEP 4: Continue leveling from side-to-side and front-to-back, compact all loose dirt behind the wall.

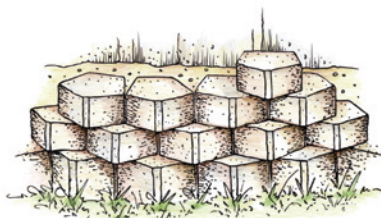

STEP 5: Finish off by landscaping surrounding area.

