
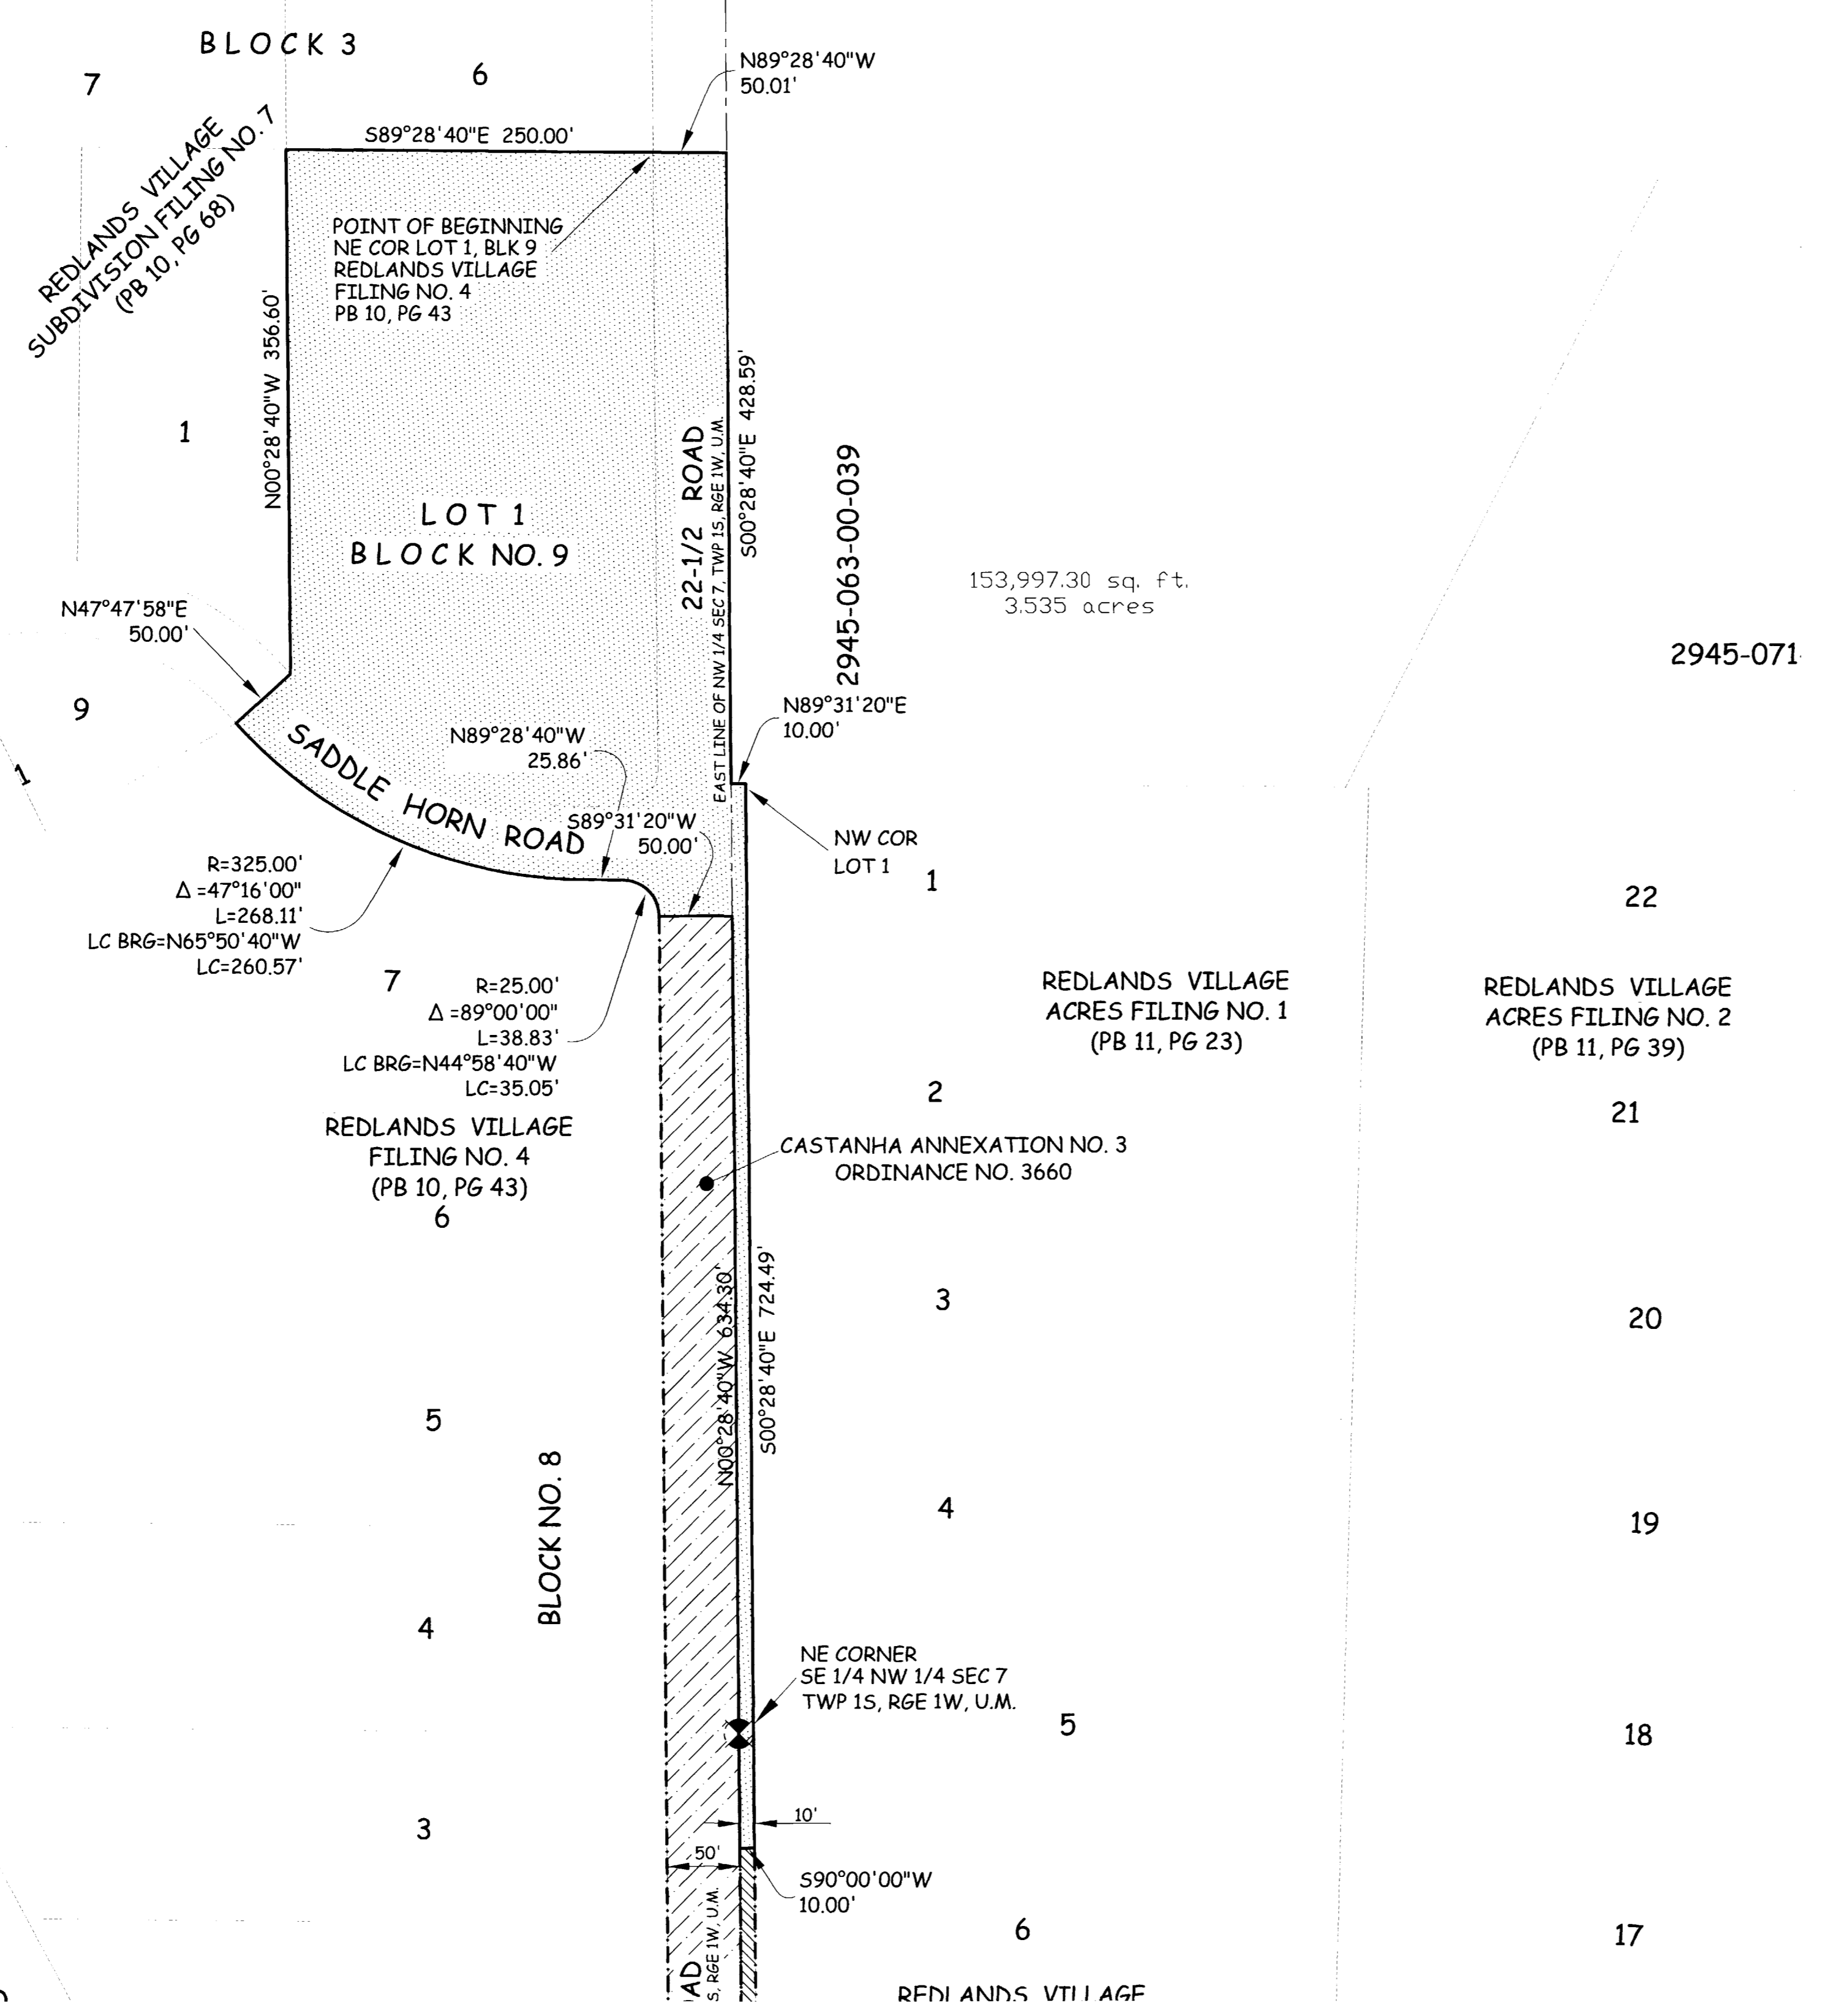


CASTANHA ANNEXATION NO. 4

SITUATE IN THE NW 1/4 OF SECTION 7, T1S, R1W, U.M.
COUNTY OF MESA, STATE OF COLORADO

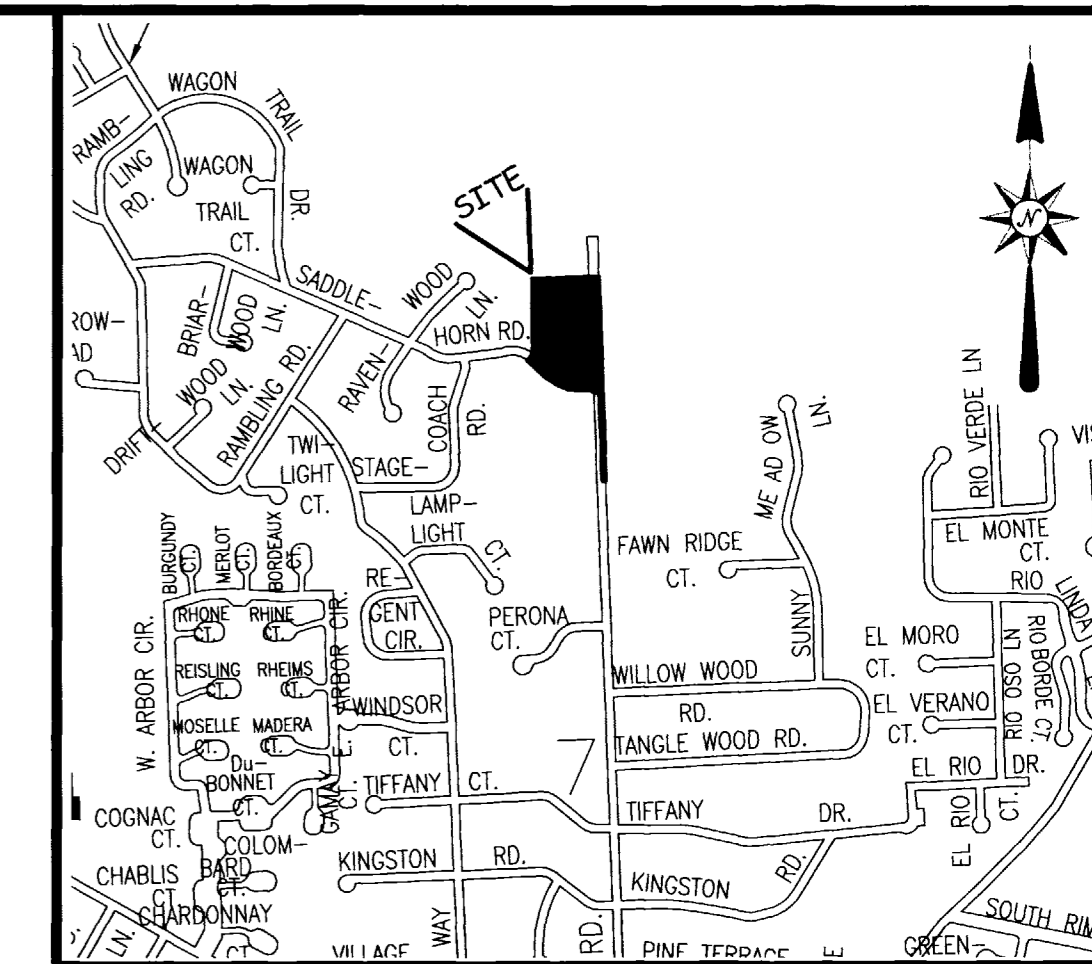

LEGAL DESCRIPTION

A certain parcel of land lying in the Northwest Quarter (NW 1/4) of Section 7, Township 1 South, Range 1 West of the Ute Principal Meridian, County of Mesa, State of Colorado and being more particularly described as follows:


BEGINNING at the Northeast corner of Lot 1, Block 9, Redlands Village Filing No. 4, as same is recorded in Plat Book 10, Page 43, Public Records of Mesa County, Colorado and assuming the East line of the NW 1/4 of said Section 7 bears S 00°28'40" E with all other bearings contained herein being relative thereto; thence from said Point of Beginning, S 89°28'40" E a distance of 50.01 feet to a point on the East line of the NW 1/4 of said Section 7; thence S 00°28'40" E along the East line of the NW 1/4 of said Section 7, a distance of 428.59 feet; thence N 98°31'20" E a distance of 10.00 feet to a point being the Northwest corner of Lot 1, Redlands Village Acres Filing No. 1, as same is recorded in Plat Book 11, Page 23, Public Records of Mesa County, Colorado; thence S 00°28'40" E along the West line of said Redlands Village Acres Filing No. 1, a distance of 724.49 feet; thence S 90°00'00" W a distance of 10.00 feet to a point on the East line of the NW 1/4 of said Section 7; thence N 00°28'40" W along the East line of the NW 1/4 of said Section 7, a distance of 634.30 feet to a point being the beginning of a 25.00 foot radius curve, concave Southwest, with a long chord bearing of N 44°58'40" W and a long chord length of 35.05 feet; thence 38.83 feet Northwesterly along the arc of said curve, through a central angle of 89°00'00"; thence N 89°28'40" W, along the South right of way for Saddle Horn Road, a distance of 25.86 feet to a point being the beginning of a 325.00 foot radius curve, concave Northeast, with a long chord bearing of N 65°50'40" W and a long chord length of 260.57 feet; thence continuing along the South right of way for said Saddle Horn Road, 268.11 Northwesterly along the arc of said curve, through a central angle of 47°16'00"; thence N 47°47'58" E a distance of 50.00 feet to a point being the Southwest corner of said Lot 1, Block 9; thence N 00°28'40" W along the West line of said Lot 1, Block 9, a distance of 356.60 feet to a point being the Northwest corner of said Lot 1, Block 9; thence S 89°28'540" E, along the North line of said Lot 1, Block 9, a distance of 250.00 feet, more or less, to the Point of Beginning.

AREA OF ANNEXATION

ANNEXATION PERIMETER	2,896.81 FT
CONTIGUOUS PERIMETER	694.30 FT.
AREA IN SQUARE FEET	153,997.3
AREA IN ACRES	3.535

LEGEND

ANNEXATION BOUNDARY	—————
EXISTING CITY LIMITS	- - - - -

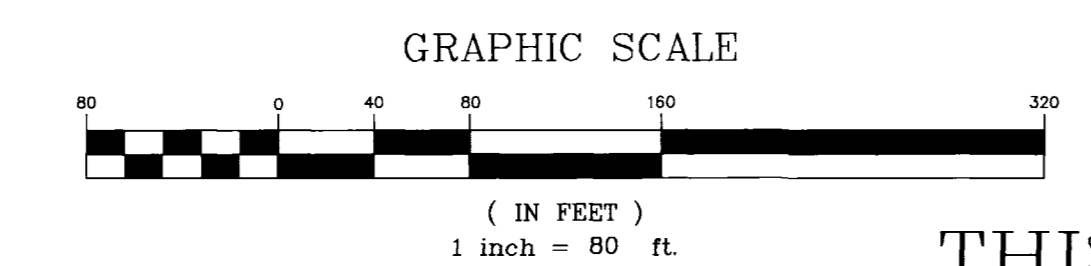

ORDINANCE NO.
3661

EFFECTIVE DATE
September 19, 2004

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

PETER T. KRICK, PLS No. 32824
Professional Land Surveyor for the City of Grand Junction
DATE: August 19th, 2004

THIS IS NOT A BOUNDARY SURVEY

Notice: According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown hereon.

DRAWN BY	P.T.K.	DATE	06-08-2004
DESIGNED BY		DATE	
CHECKED BY	T.W.	DATE	06-08-2004
APPROVED BY		DATE	



PUBLIC WORKS AND UTILITIES
REAL ESTATE DIVISION

CASTANHA ANNEXATION NO. 4