



BELLHOUSE ANNEXATION NO. 2

SITUATE IN THE N 1/2 OF SECTION 17, T1S, R1W, U.M.
COUNTY OF MESA, STATE OF COLORADO

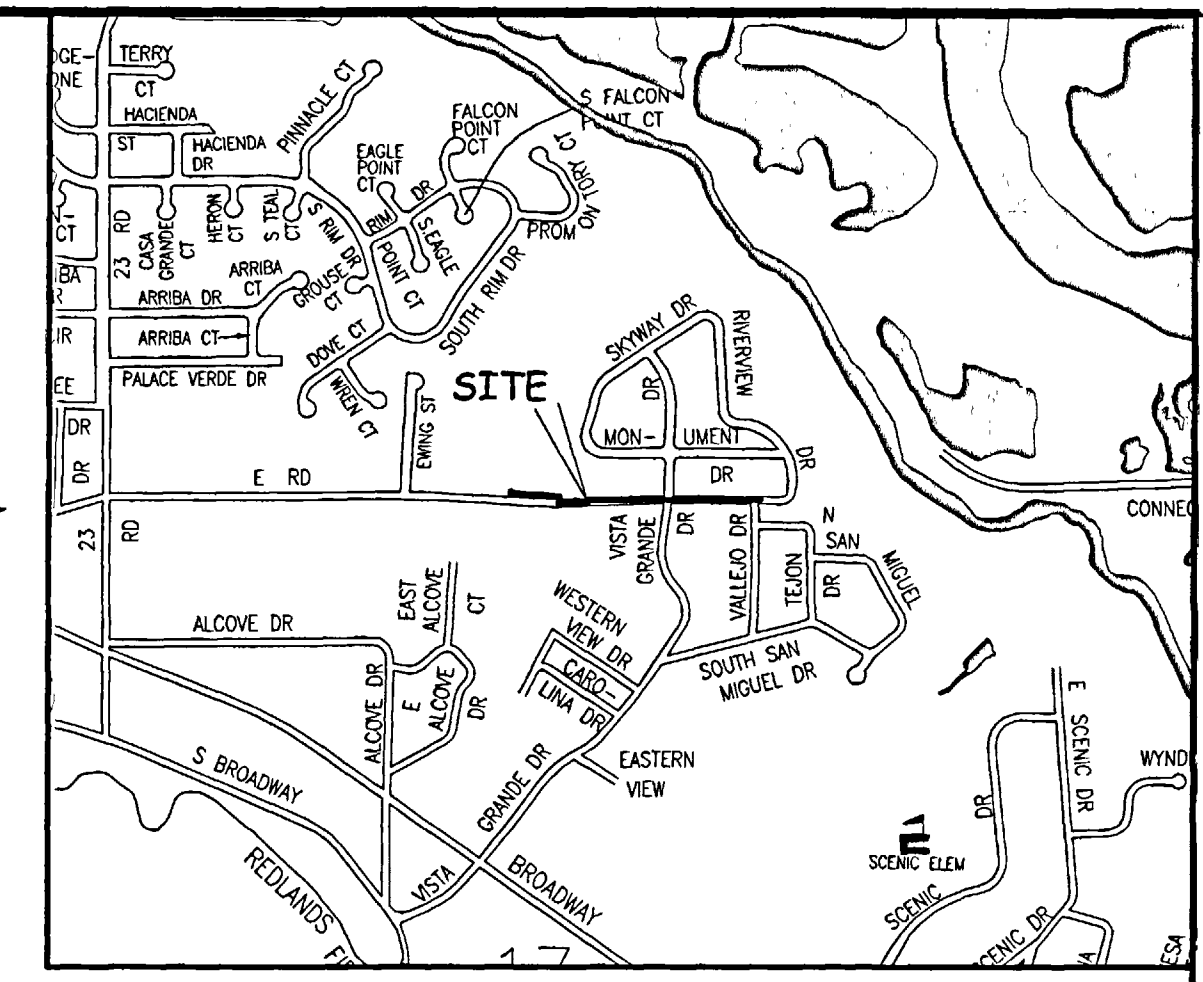

LEGAL DESCRIPTION

A certain parcel of land located in the North 1/2 (N 1/2) of Section 17, Township 1 South, Range 1 West, of the Ute Principal Meridian, County of Mesa, State of Colorado and being more particularly described as follows:

Commencing at the Southwest corner of Lot 2, Block No. 1 of Second Amendment Rio Vista Subdivision as recorded in Plat Book 9, Page 199, Mesa County, Colorado public records and assuming the South line of said Second Amendment Rio Vista Subdivision to bear N89°54'02"E with all bearings contained herein relative thereto; thence N89°54'02"E along the South line of said Second Amendment Rio Vista Subdivision also being the North right of way of E Road as depicted on said Second Amendment Rio Vista Subdivision a distance of 145.00 feet to the Point of Beginning; thence N89°54'02"E continuing along the South line of Second Amendment Rio Vista Subdivision a distance of 940.00 feet; thence S00°05'58"E a distance of 5.00 feet; thence S89°54'02"W along a line being 5.00 feet South of and parallel with the South line of said Second Amendment Rio Vista Subdivision a distance of 935.01 feet; thence S00°00'00"E a distance of 15.00 feet; thence S89°54'02"W a distance of 159.97 feet; thence N00°05'59"W a distance of 37.63 feet; thence N86°48'03"W along a line being 14.65 feet South of and parallel with the North right of way of E Road as described in Book 1005, Page 411 of the Mesa County, Colorado public records a distance of 267.01 feet; thence N08°49'04"E a distance of 14.72 feet to said North right of way of E Road; thence S86°48'03"E along said North right of way of E Road a distance of 5.02; thence S08°49'04"W a distance of 9.70 feet; thence S86°48'03"E along a line being 9.65 feet South of and parallel with said North right of way of E Road a distance of 266.21 feet; thence S00°05'59"E a distance of 37.35 feet; thence N89°54'02"E a distance of 149.97 feet; thence N00°00'00"W a distance of 15.00 feet to the Point of Beginning.

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

Peter T. Krick
PETER T. KRICK, PLS No. 32824
Professional Land Surveyor for the
City of Grand Junction
DATE: APRIL 7, 2006




AREA OF ANNEXATION

ANNEXATION PERIMETER	2857.60 FT
CONTIGUOUS PERIMETER	478.23 FT.
AREA IN SQUARE FEET	7,120***
AREA IN ACRES	0.16

LEGEND

ANNEXATION BOUNDARY	— — — — —
EXISTING CITY LIMITS	- - - - -

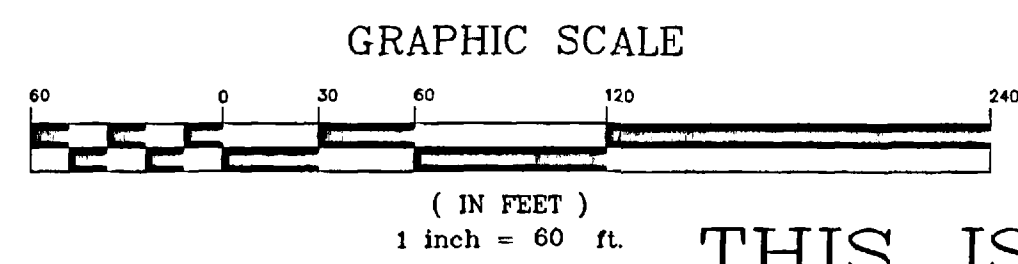

ORDINANCE NO.
3880

EFFECTIVE DATE
MAY 7, 2006

THIS IS NOT A BOUNDARY SURVEY

DRAWN BY	T.L.P.	DATE	1-06-06
DESIGNED BY		DATE	
CHECKED BY	P.T.K.	DATE	
APPROVED BY		DATE	

SCALE
1" = 60'



PUBLIC WORKS
AND UTILITIES
REAL ESTATE DIVISION

BELLHOUSE ANNEXATION NO. 2
13062700.tif

Notice:
According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown hereon.