


CHIPETA HEIGHTS ANNEXATION

SITUATE IN THE SE 1/4 SE 1/4 OF SECTION 30, T15, R1E, U.M.

COUNTY OF MESA, STATE OF COLORADO

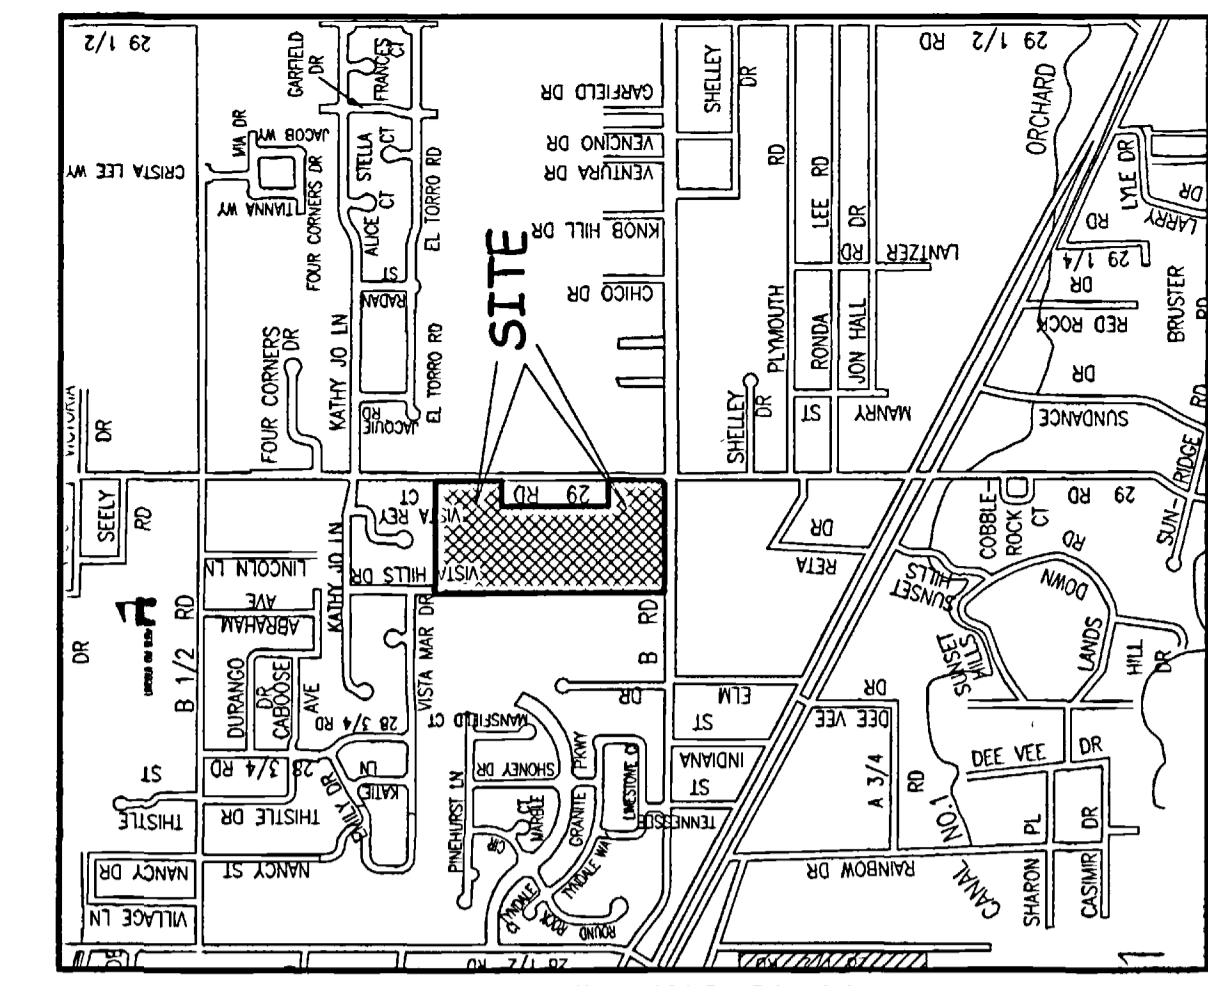


LOCATION MAP: NOT-TO-SCALE



LEGAL DESCRIPTION


A certain parcel of land located in the Southeast Quarter of the Southeast Quarter (SE 1/4 SE 1/4) of Section 30, Township 1 South, Range 1 East of the Ute Principal Meridian, County of Mesa, State of Colorado and being more particularly described as follows:

Commencing at the Northeast corner of the SE 1/4 SE 1/4 of said Section 30 and assuming the East line of the SE 1/4 SE 1/4 of said Section 30 to bear S00°10'38"E with all bearings contained herein relative thereto, thence N89°58'28"W along the North line of the SE 1/4 SE 1/4 of said Section 30 a distance of 30.00 feet to a point on the Westerly right of way of 29 Road as described in Book 3628, Page 471 of the Mesa County, Colorado public records, being the Point of Beginning; thence S00°10'38"E along said Westerly right of way of 29 Road a distance of 367.46 feet; thence S89°57'41"W a distance of 146.70 feet; thence S00°06'38"E a distance of 600.00 feet; thence N89°57'41"E a distance of 147.40 feet to a point on the Westerly right of way as described in Book 3580, Page 799 of the Mesa County, Colorado public records; thence S00°10'38"E along said Westerly right of way a distance of 313.50 feet to a point on the Easterly projection on the Northerly right of way of B Road as described in Book 894, Page 202, of the Mesa County, Colorado public records; thence S89°57'46"W along said right of way line of B Road a distance of 629.35 feet to the Southwest corner of Lot 32, of The Grand Junction Orchard Mesa Land Company's Orchard Subdivision, as recorded in Plat Book 1, Page 26, of the Mesa County, Colorado public records; thence N00°06'25"W along the Westerly line of Lot 32 and Lot 25 of said Grand Junction Orchard Mesa Land Company's Orchard Subdivision a distance of 1282.54 feet to the Northwest Corner of said Lot 25; thence S89°58'28"E along the Northerly line of said Lot 25 a distance of 627.81 feet to the Point of Beginning.

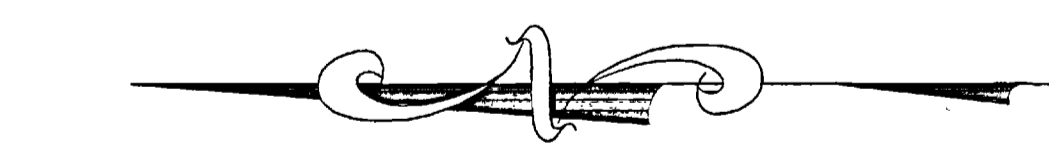


The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

P.T.K.
 PETER T. KRICK, PLS No. 32824
 Professional Land Surveyor for the
 City of Grand Junction
 DATE: APRIL 7, 2006

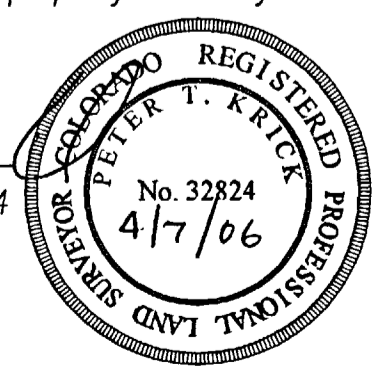

PLAT BOOK 15, PAGES 197-198
 CHIPETA GOLF COURSE

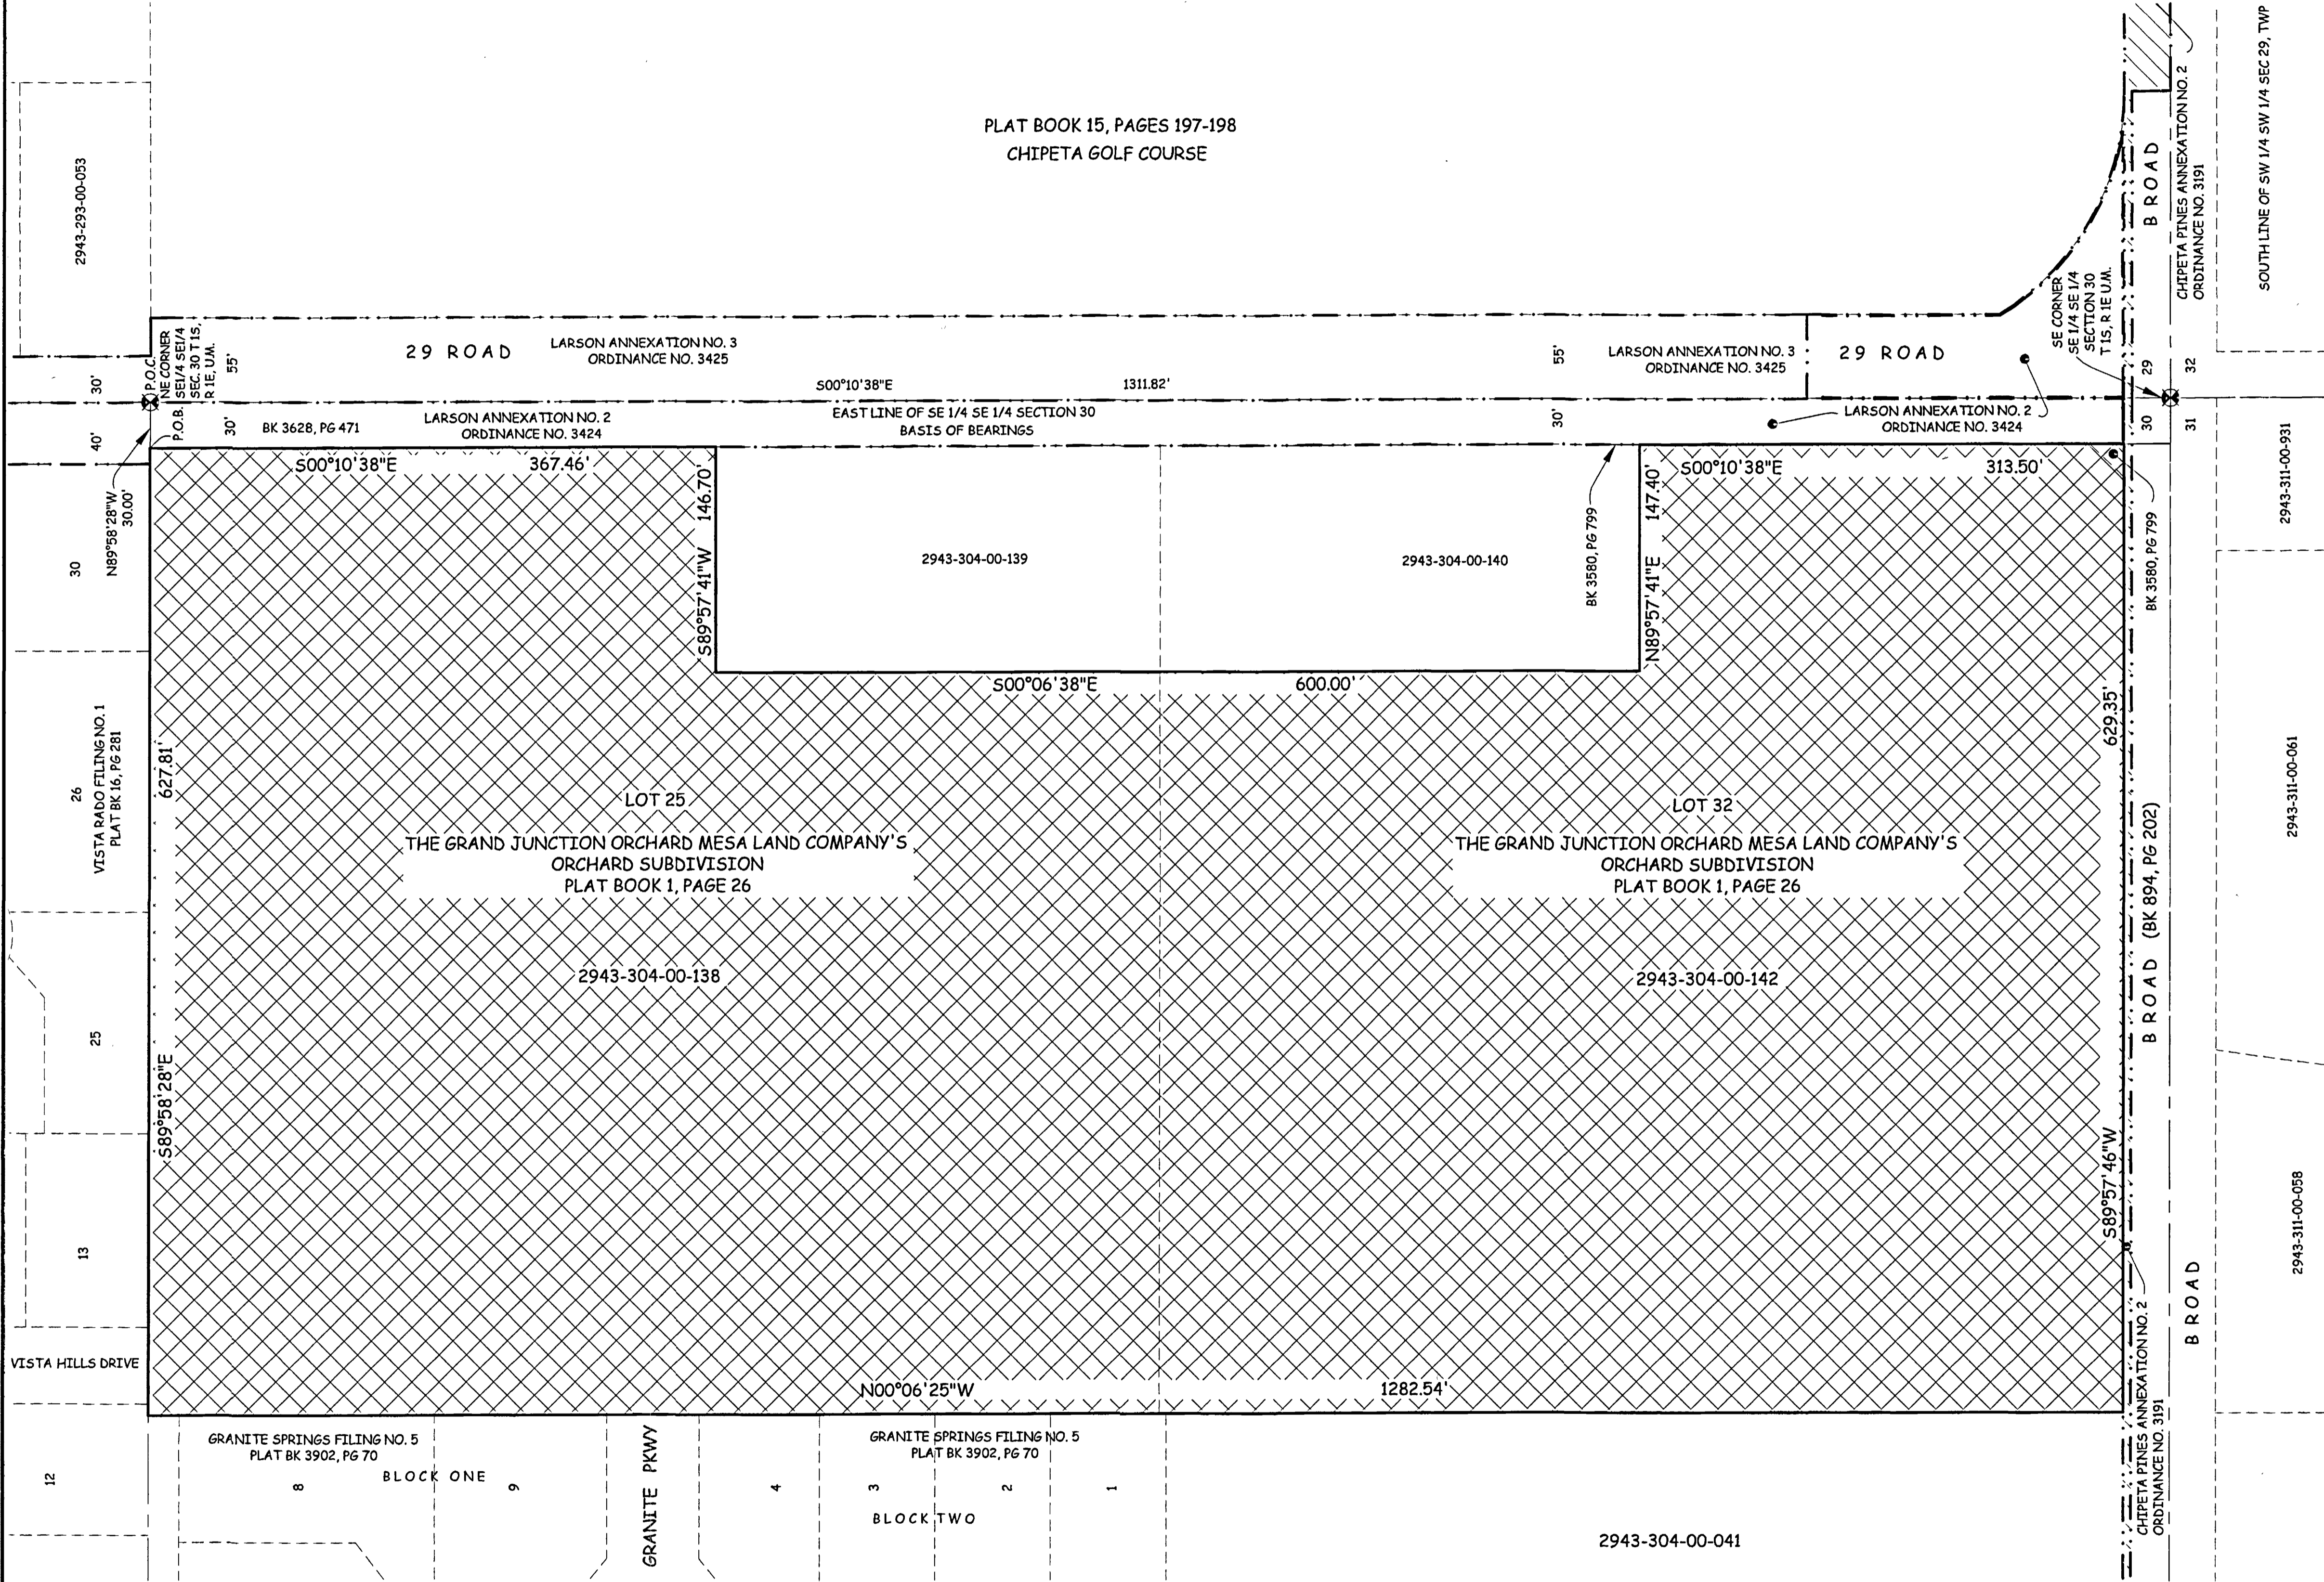


AREA OF ANNEXATION

ANNEXATION PERIMETER	4115.66 FT
CONTIGUOUS PERIMETER	1,320.31 FT.
AREA IN SQUARE FEET	717,739***
AREA IN ACRES	16.48

***CONTAINS NO AREA WITHIN PUBLIC RIGHTS OF WAY

LEGEND

ANNEXATION BOUNDARY	---
EXISTING CITY LIMITS	---

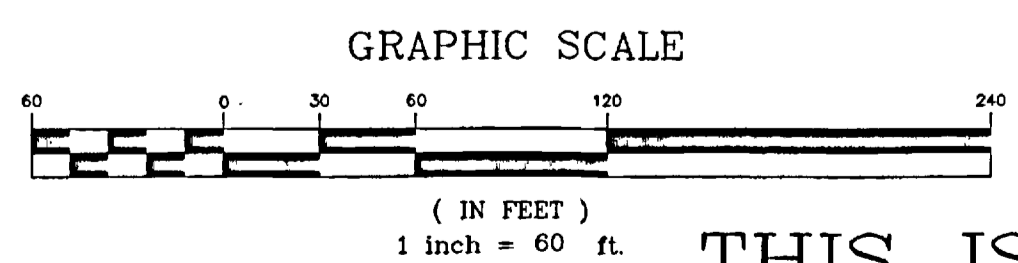

ORDINANCE NO.
 3886

EFFECTIVE DATE
 MAY 7, 2006

THIS IS NOT A BOUNDARY SURVEY

Notice:
 According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown herein.

DRAWN BY	T.L.P.	DATE	1-20-06
DESIGNED BY		DATE	
CHECKED BY	P.T.K.	DATE	
APPROVED BY		DATE	

SCALE
 1" = 60'



**PUBLIC WORKS
 AND UTILITIES
 REAL ESTATE DIVISION**

CHIPETA HEIGHTS ANNEXATION
 13063000.tif