



BELOW/SENATORE/STONE ANNEXATION NO.2

SITUATE IN THE NW 1/4 SW 1/4 OF SECTION 16, T15, R1W, U.M.
 COUNTY OF MESA, STATE OF COLORADO

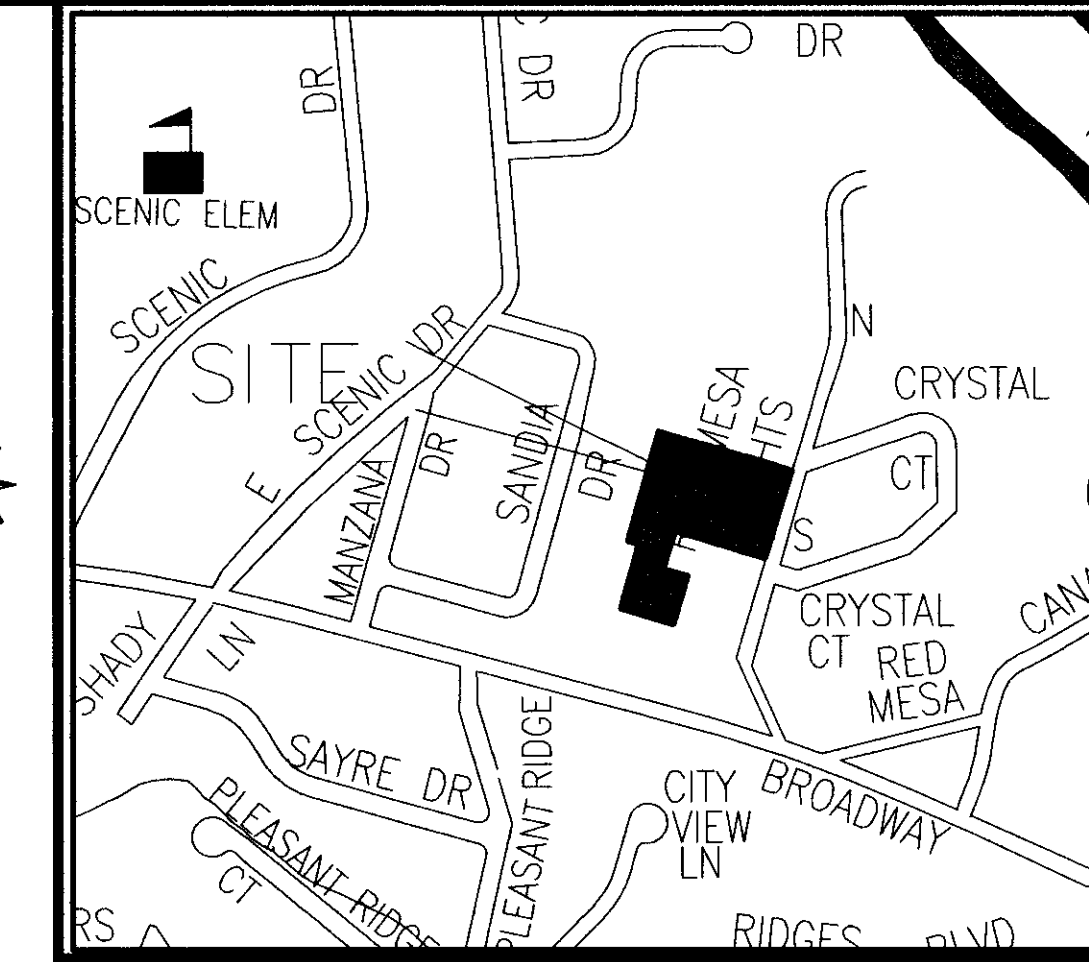

LOCATION MAP: NOT-TO-SCALE

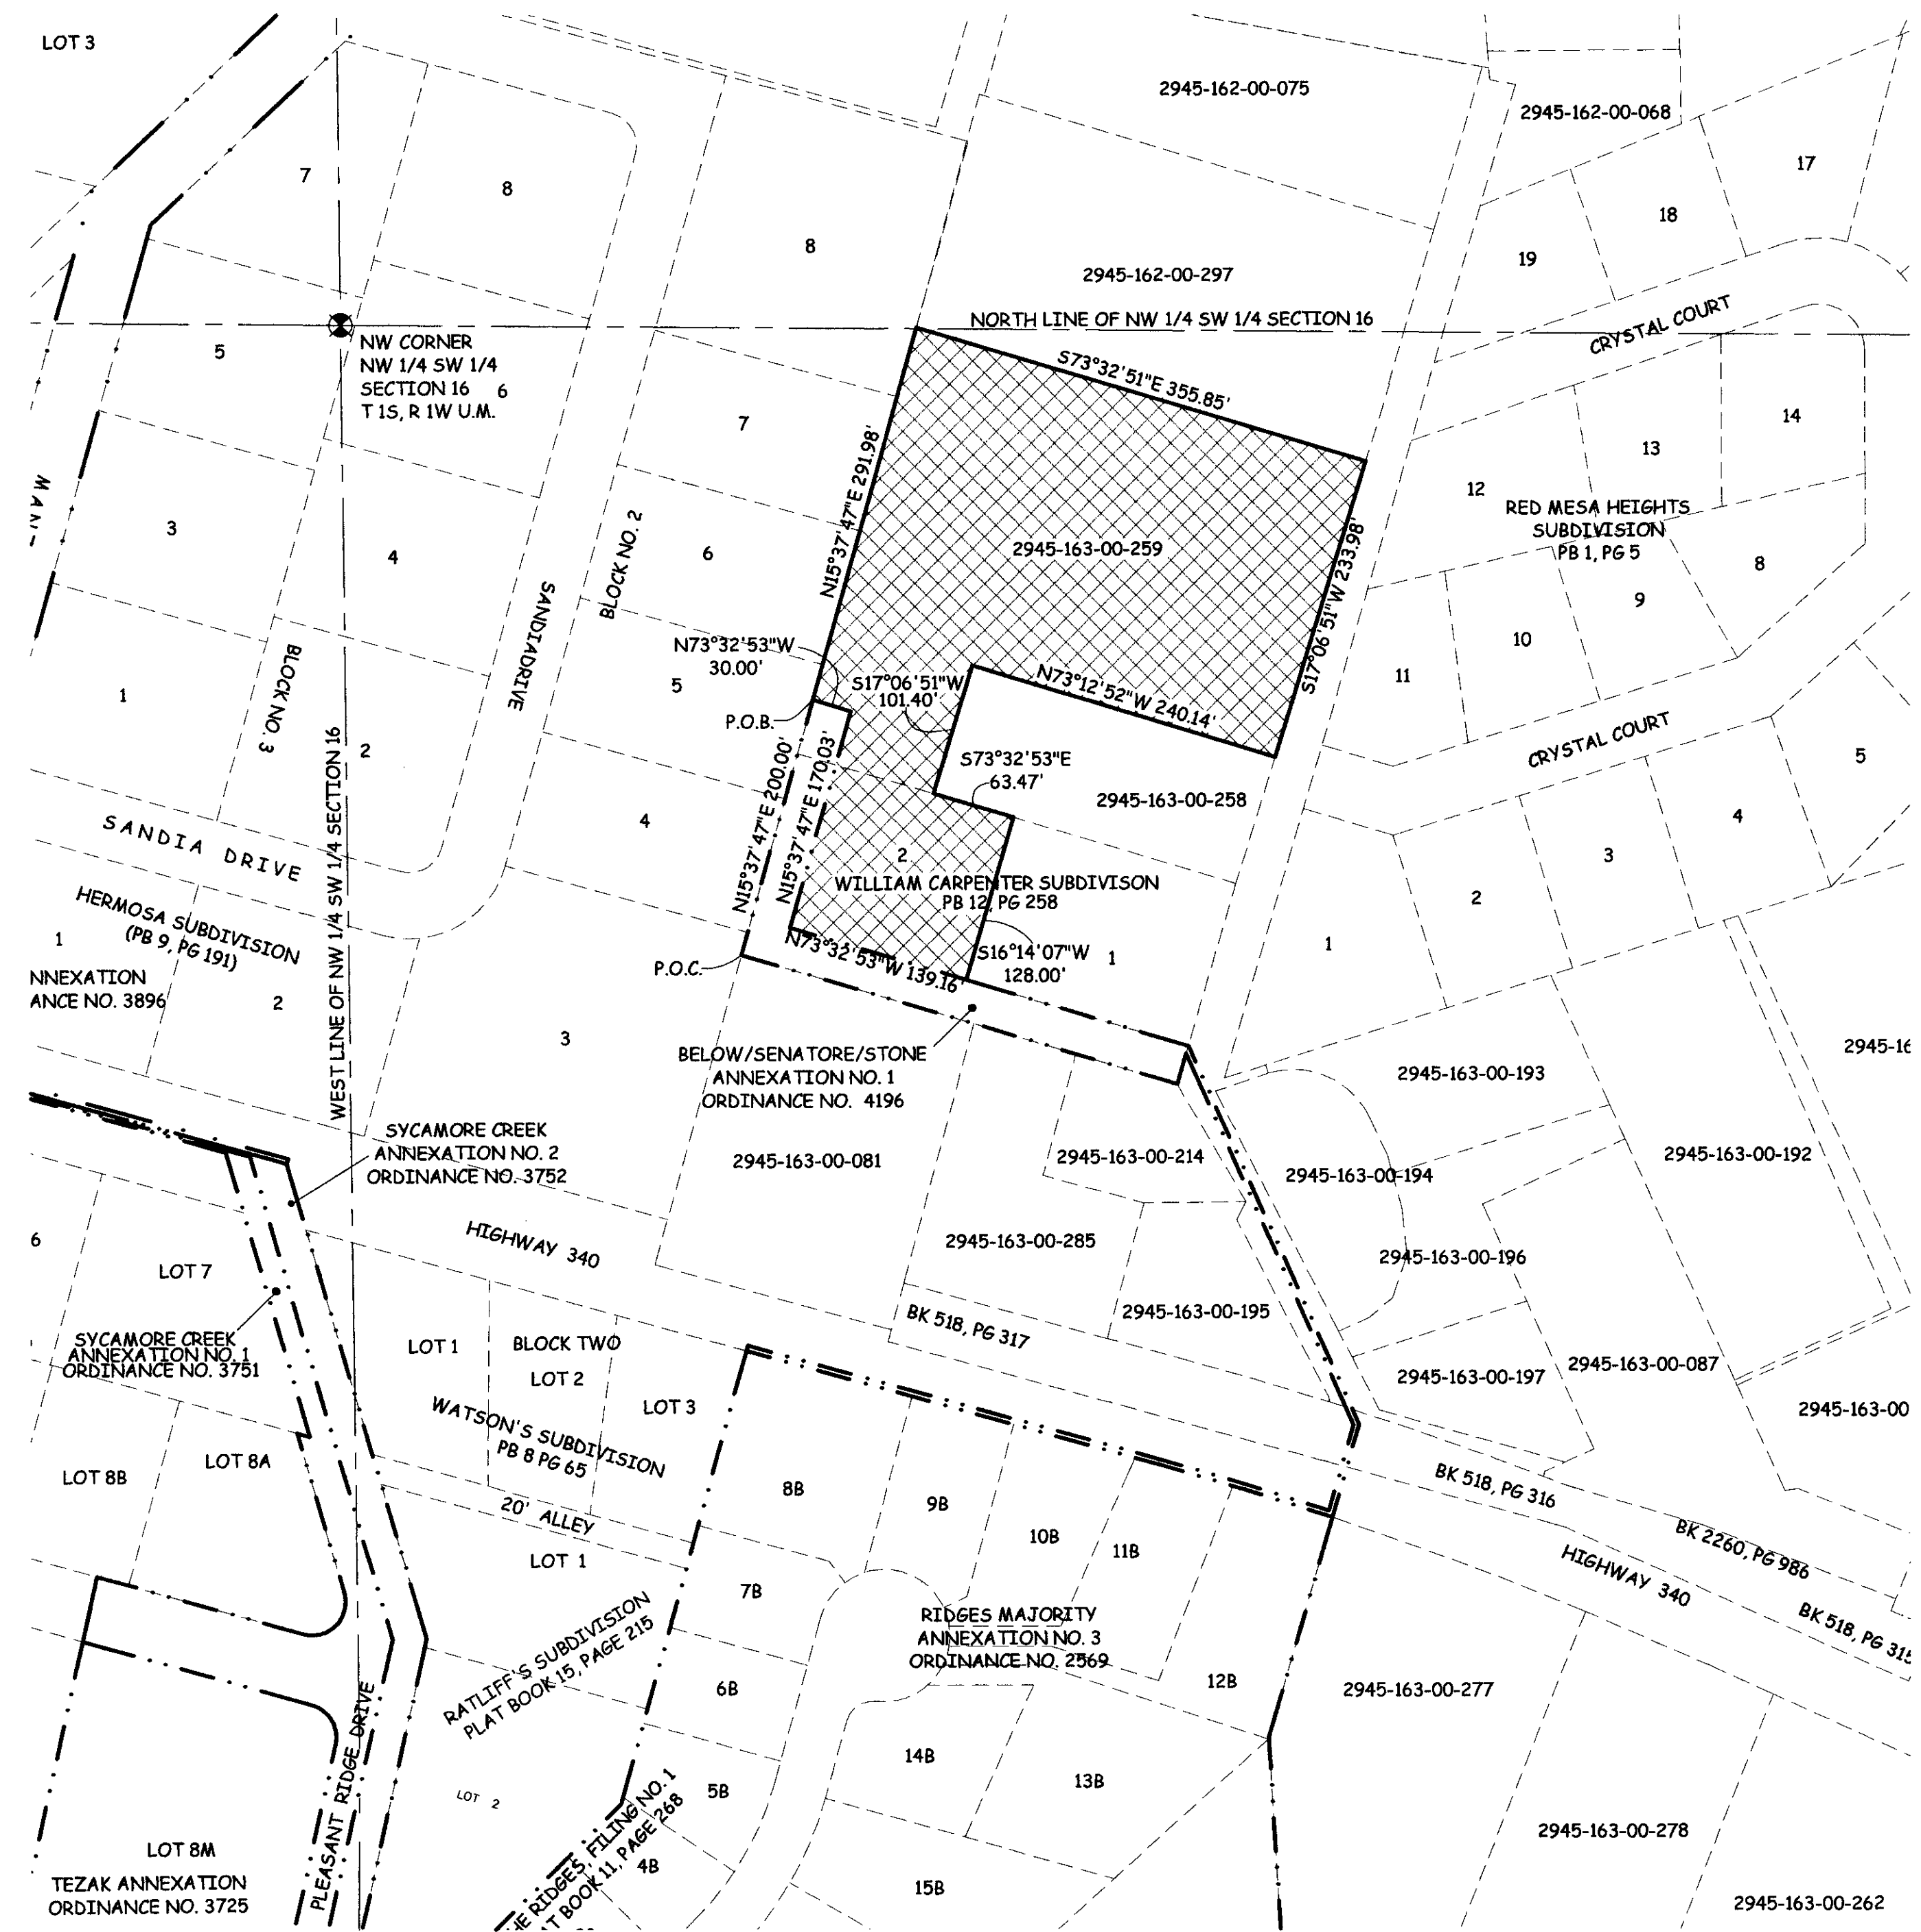

DESCRIPTION

A certain parcel of land located in the Northwest Quarter of the Southwest Quarter (NW 1/4 SW 1/4) of Section 16, Township One South, Range One West of the Ute Principal Meridian, County of Mesa, State of Colorado and being more particular described as follows:


Commencing at the Southwest corner of Lot 2 of William Carpenter Subdivision as recorded in Plat Book 12, Page 258 of the Mesa County, Colorado public records; thence N15°37'47"E along the East line of Hermosa Subdivision as recorded in Plat Book 9, Page 191 of the Mesa County, Colorado public records, a distance of 200.00 feet to the Point of Beginning; thence N15°37'47"E along the East line of said Hermosa Subdivision, a distance of 291.98 feet; thence S73°32'51"E a distance of 355.85 feet; thence S17°06'51"W a distance of 233.98 feet; thence N73°12'52"W a distance of 240.14 feet; thence S17°06'51"W a distance of 101.40 feet to a point on the North line of Lot 2 of said William Carpenter Subdivision; thence S73°32'51"E along the North line of Lot 2 of said William Carpenter Subdivision, a distance of 63.47 feet to the Northwest corner of Lot 1 of said William Carpenter Subdivision; thence S16°14'07"W along the West line of Lot 1 of said William Carpenter Subdivision, a distance of 128.00 feet; thence N73°32'53"W a distance of 139.16 feet; thence N15°37'47"E a distance of 170.03 feet; thence N73°32'53"W a distance of 30.00 feet to the Point of Beginning.

ABBREVIATIONS	
P.O.C.	POINT OF COMMENCEMENT
P.O.B.	POINT OF BEGINNING
R.O.W.	RIGHT OF WAY
SEC.	SECTION
TWP.	TOWNSHIP
RGE.	RANGE
U.M.	UTE MERIDIAN
NO.	NUMBER
SQ. FT.	SQUARE FEET
Δ=	CENTRAL ANGLE
RAD.	RADIUS
AL	ARC LENGTH
CHL	CHORD LENGTH
CHB	CHORD BEARING
BLK	BLOCK
PB	PLAT BOOK
BK	BOOK
PG	PAGE

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

AREA OF ANNEXATION	
ANNEXATION PERIMETER	1,754.02 FT
CONTIGUOUS PERIMETER	339.19 FT.
AREA IN SQUARE FEET	109,853.28
AREA IN ACRES	2.52

LEGEND	
ANNEXATION BOUNDARY	— — — — —
EXISTING CITY LIMITS

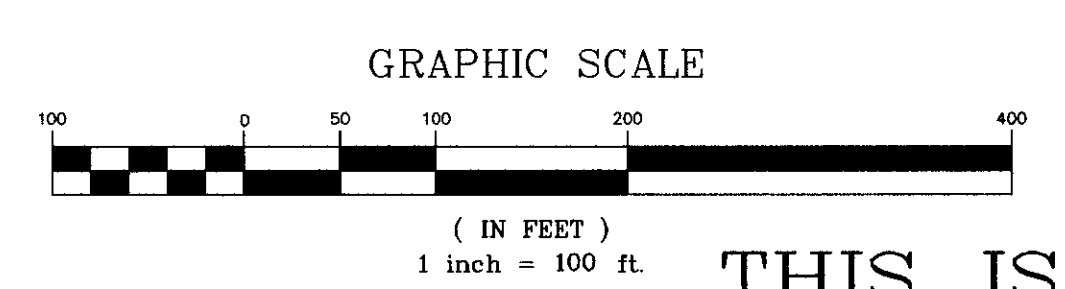

ORDINANCE NO.
4197

EFFECTIVE DATE
April 20th, 2008

THIS IS NOT A BOUNDARY SURVEY

Notice:
According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown hereon.

DRAWN BY	J.K.T.	DATE	01-09-08
DESIGNED BY		DATE	
CHECKED BY	P.T.K.	DATE	
APPROVED BY		DATE	

SCALE	
1" = 100'	



PUBLIC WORKS
AND UTILITIES
REAL ESTATE DIVISION

BELOW/SENATORE/STONE
ANNEXATION NO. 2

PETER T. KRICK, PLS No. 32824
Professional Land Surveyor for the
City of Grand Junction
DATE: March 26th, 2008

