


LUSK ANNEXATION

SITUATE IN THE NW 1/4 OF SECTION 26 AND THE NE 1/4 OF SECTION 27,
T11S, R101W, 6TH P.M. COUNTY OF MESA, STATE OF COLORADO

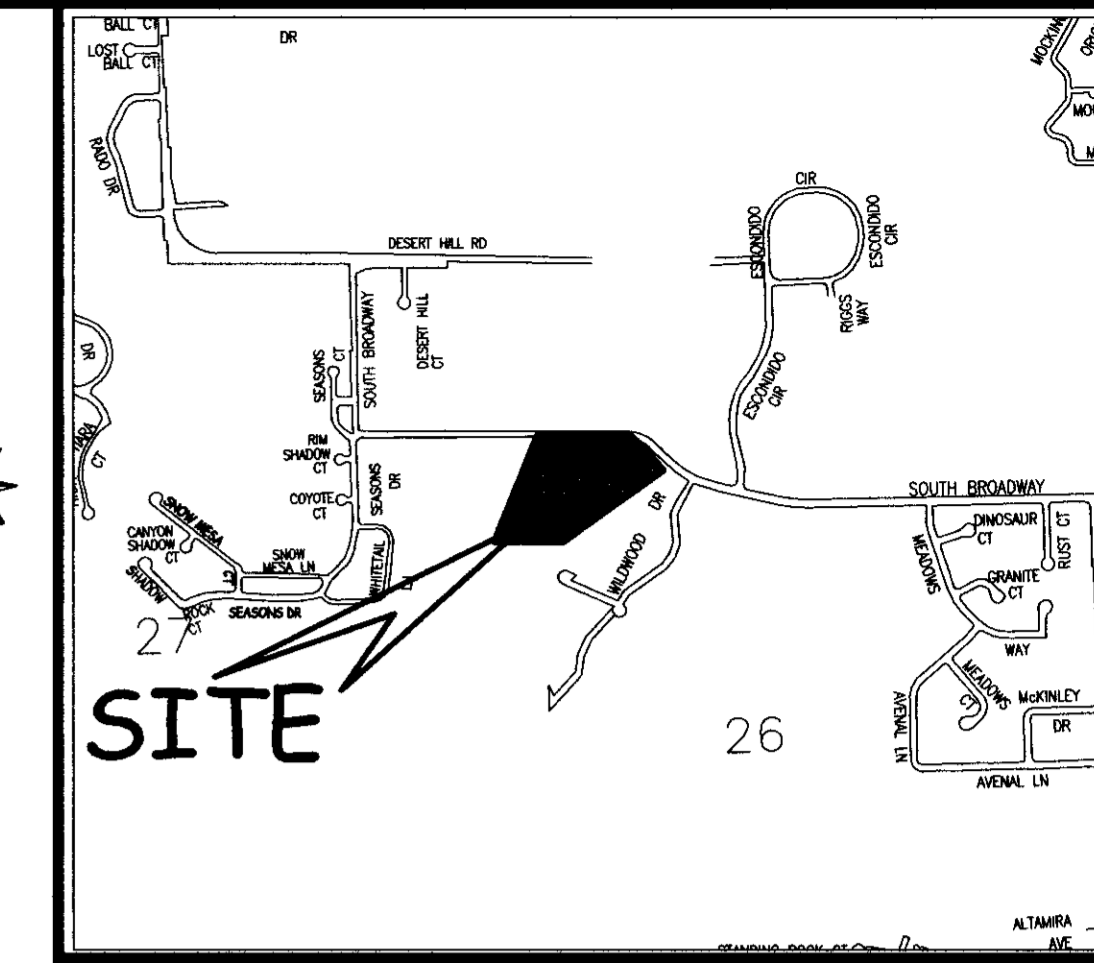

LEGAL DESCRIPTION

A certain parcel of land located in the Northwest 1/4 of Section 26 and the Northeast 1/4 of Section 27, Township Eleven South, Range One Hundred One West of the Sixth Principal Meridian, County of Mesa, State of Colorado and being more particular described as follows:



Beginning at the Northeast corner of Hacienda Acres Subdivision, as recorded in Plat Book 11, Page 154 Public Records of Mesa County, Colorado and assuming the East line of said Hacienda Acres Subdivision bears N 23°43'22" E with all other bearings contained herein are relative thereto; thence from said Point of Beginning, S88°53'14"E along a line being the South line of South Camp Annexation Parcel No. 3, City of Grand Junction, Ordinance No. 2759, a distance of 524.35 feet; thence S40°16'37"E a distance of 276.30 feet; thence S55°59'15"W a distance of 690.17 feet to a point on the North line of Wildwood Subdivision, as recorded in Plat Book 11, Page 141 Public Records of Mesa County, Colorado; thence N88°21'54"W a distance of 392.78 feet to a point on the East line of Lot 4 of said Hacienda Acres Subdivision; thence N23°43'22"E along the East line of Lot 4 of said Hacienda Acres Subdivision, a distance of 650.83 feet to the Point of Beginning.

ABBREVIATIONS

P.O.C.	POINT OF COMMENCEMENT
P.O.B.	POINT OF BEGINNING
R.O.W.	RIGHT OF WAY
SEC.	SECTION
TWP.	TOWNSHIP
RGE.	RANGE
P.M.	PRINCIPAL MERIDIAN
NO.	NUMBER
SQ. FT.	SQUARE FEET
Δ	CENTRAL ANGLE
RAD	RADIUS
AL	ARC LENGTH
CHL	CHORD LENGTH
CHB	CHORD BEARING
BLK	BLOCK
PB	PLAT BOOK
BK	BOOK
PG	PAGE

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

[Signature]
 PETER T. KRICK, PLS No. 32824
 Professional Land Surveyor for the
 City of Grand Junction
 DATE: March 24th, 2008

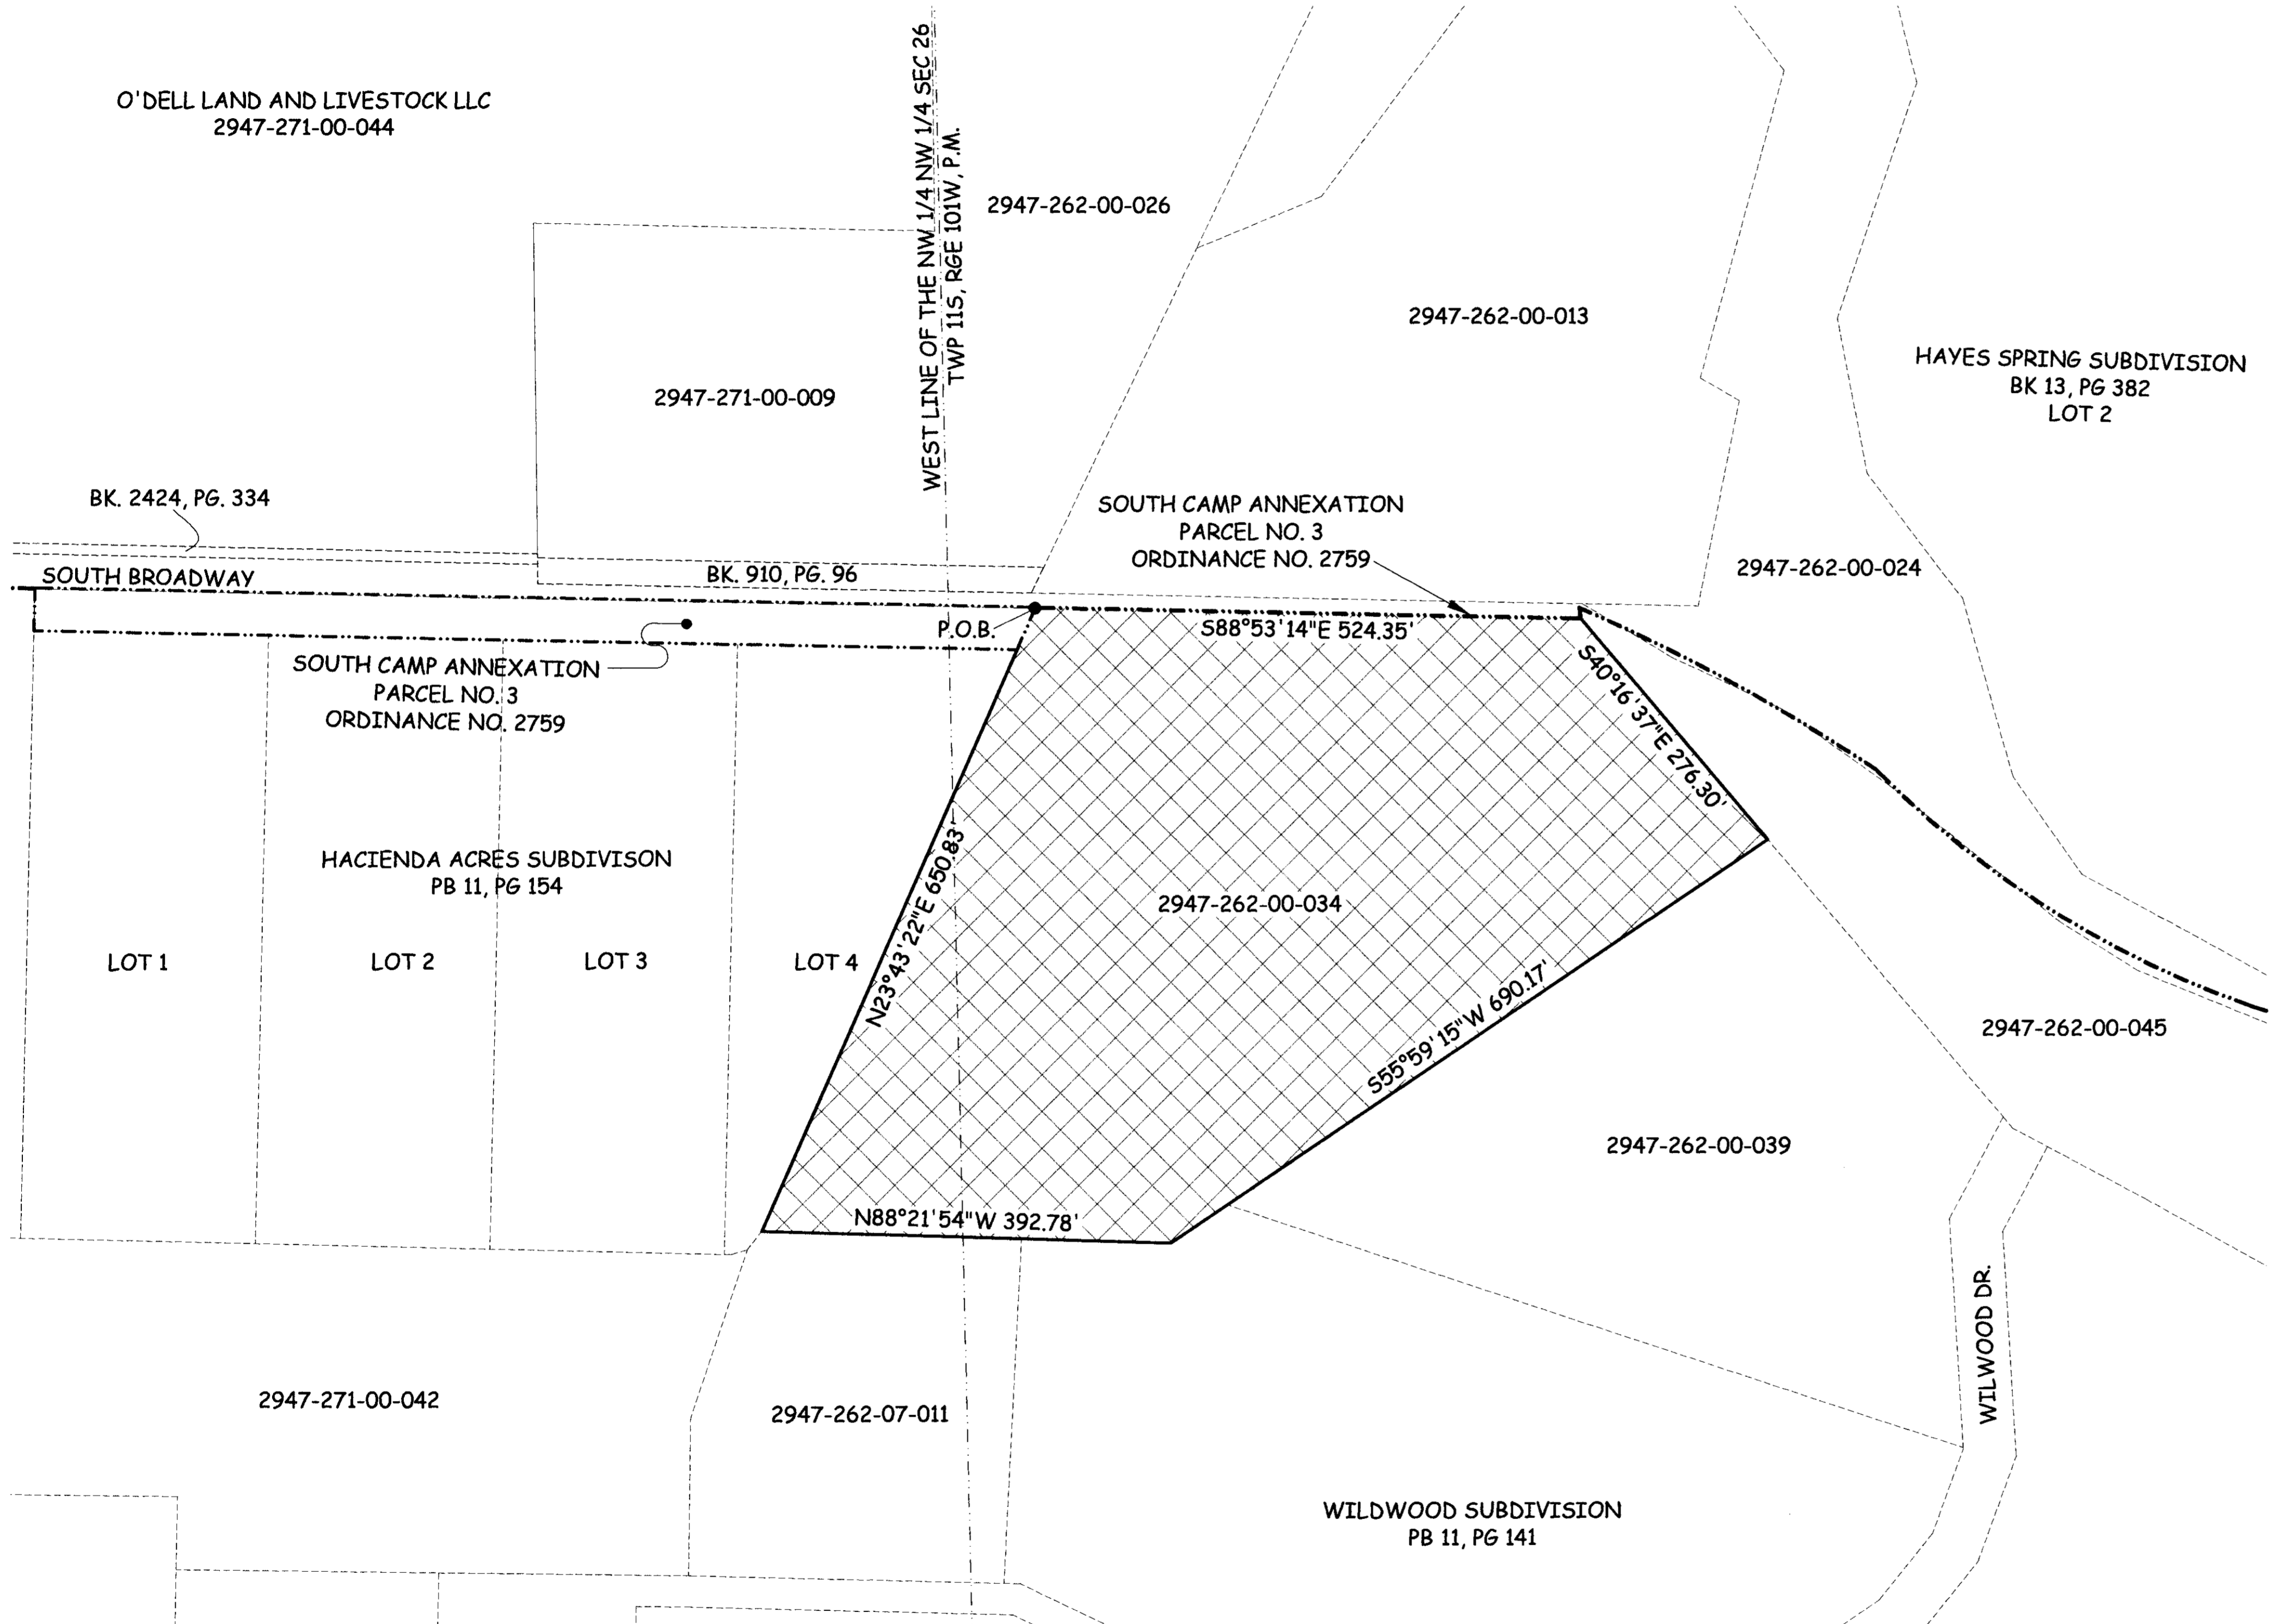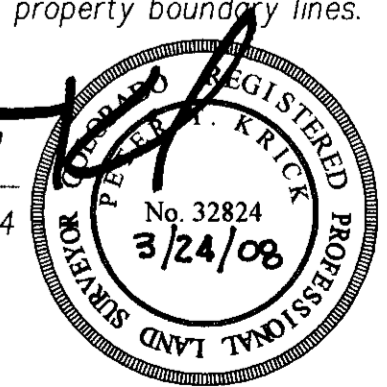


AREA OF ANNEXATION

ANNEXATION PERIMETER	2,534.43 FT
CONTIGUOUS PERIMETER	567.68 FT.
AREA IN SQUARE FEET	371,669
AREA IN ACRES	8.53

LEGEND

ANNEXATION BOUNDARY	— — — — —
EXISTING CITY LIMITS	- - - - -

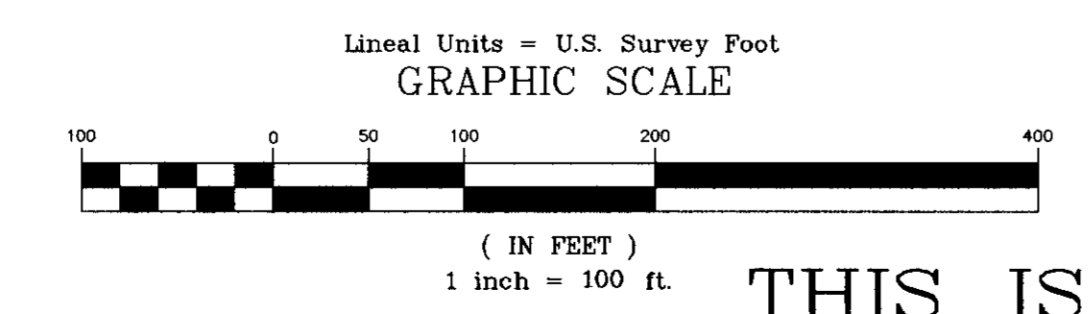

ORDINANCE NO.
4202

EFFECTIVE DATE
April 20th, 2008

THIS IS NOT A BOUNDARY SURVEY

Notice:
 According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown hereon.

DRAWN BY	J.K.T.	DATE	12-26-07
DESIGNED BY		DATE	
CHECKED BY	P.T.K.	DATE	
APPROVED BY		DATE	

SCALE
1" = 100'



PUBLIC WORKS
AND UTILITIES
REAL ESTATE DIVISION

LUSK ANNEXATION

12076850