


# WILLOW WOOD VILLAGE ANNEXATION NO. 2

SITUATE IN THE NE 1/4 NW 1/4 OF SECTION 15, T1S, R1E, U.M.  
COUNTY OF MESA, STATE OF COLORADO

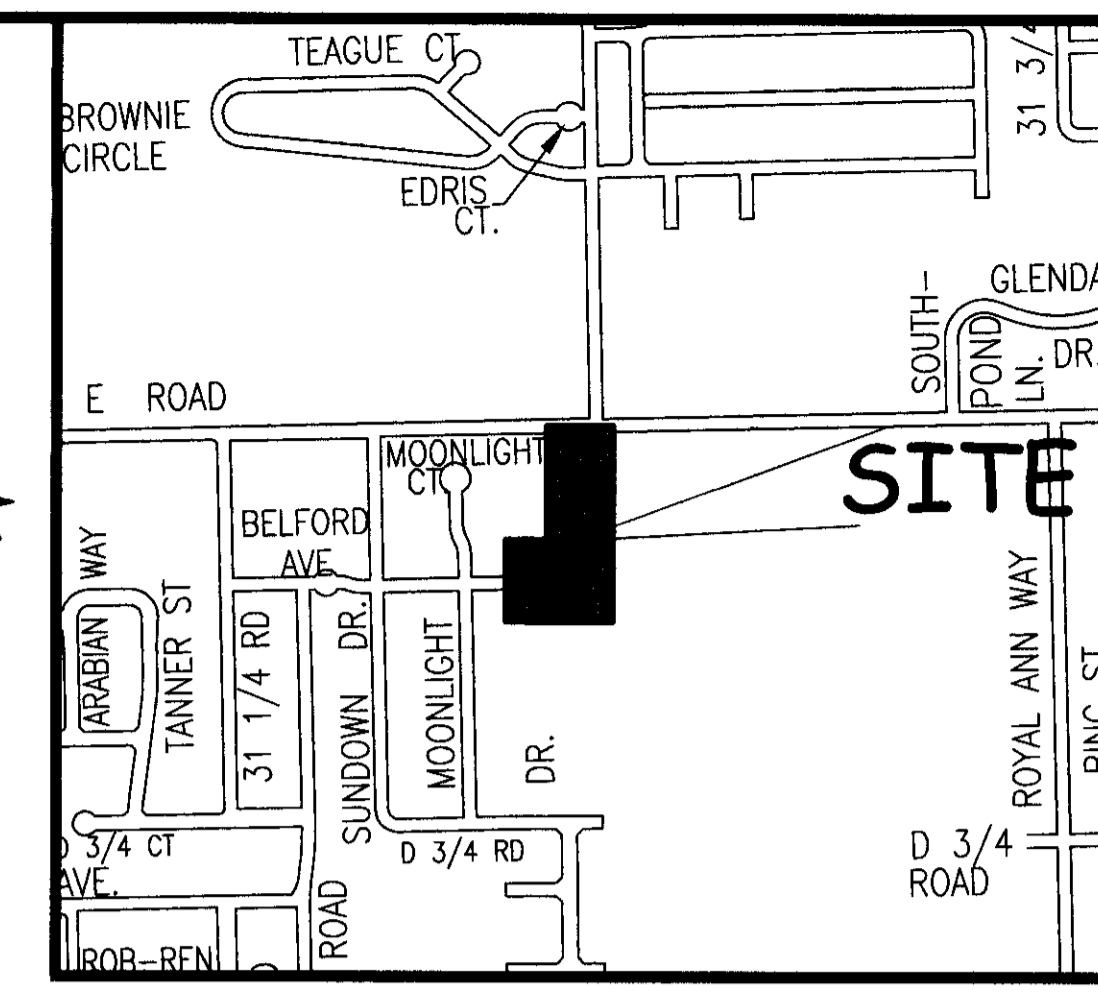

LOCATION MAP: NOT-TO-SCALE

## LEGAL DESCRIPTION

A certain parcel of land located in the Northeast Quarter of the Northwest Quarter (NE 1/4 NW 1/4) of Section 15, Township One South, Range One East of the Ute Meridian, County of Mesa, State of Colorado and being more particular described as follows:



Commencing at the Northwest corner of Summit View Meadows Subdivision, as same is recorded in Plat Book 19, Page's 323 and 324, public records of Mesa County, Colorado, said point also being the Northwest corner of Summit View Meadows Annexation, Ordinance No. 3460, City of Grand Junction and assuming the East line of the NE 1/4 NW 1/4 of said Section 15 to bear S00°03'03"E with all bearings contained herein relative thereto; thence N00°02'25"W a distance of 593.08 feet along the East line of Sundown Village No. 2 Subdivision, as same is recorded in Plat Book 15, Page's 35 and 36, public records of Mesa County, Colorado to the Point of Beginning; thence N00°02'25"W a distance of 249.97 feet along the East line of said Sundown Village No. 2 Subdivision to the Southwest corner of that certain Parcel of land described in Book 4203, Page 10, public records of Mesa County, Colorado; thence S89°50'37"E along the South line of said Parcel of land a distance of 125.00 feet; thence N00°02'25"W along the East line of said Parcel of land a distance of 348.46 feet to a point on the North line of the NE 1/4 NW 1/4 of said Section 15; thence S89°51'00"E a distance of 202.02 feet along the North line of the NE 1/4 NW 1/4 of said Section 15 to the Northeast corner of Willow Wood Village Annexation No. 1, Ordinance No. 4217, City of Grand Junction; thence N89°52'21"W a distance of 327.13 feet along the North line of said Willow Wood Village Annexation No. 1 to the Point of Beginning.

**ABBREVIATIONS**

P.O.C.	POINT OF COMMENCEMENT
P.O.B.	POINT OF BEGINNING
R.O.W.	RIGHT OF WAY
SEC.	SECTION
TWP.	TOWNSHIP
RGE.	RANGE
U.M.	UTE MERIDIAN
NO.	NUMBER
SQ. FT.	SQUARE FEET
∠	CENTRAL ANGLE
RAD.	RADIUS
AL	ARC LENGTH
CHL	CHORD LENGTH
CHB	CHORD BEARING
BLK	BLOCK
PB	PLAT BOOK
BK	BOOK
PG	PAGE

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

*[Signature]*  
PETER T. KRICK, PLS No. 32824  
Professional Land Surveyor for the City of Grand Junction  
DATE: May 7th, 2008

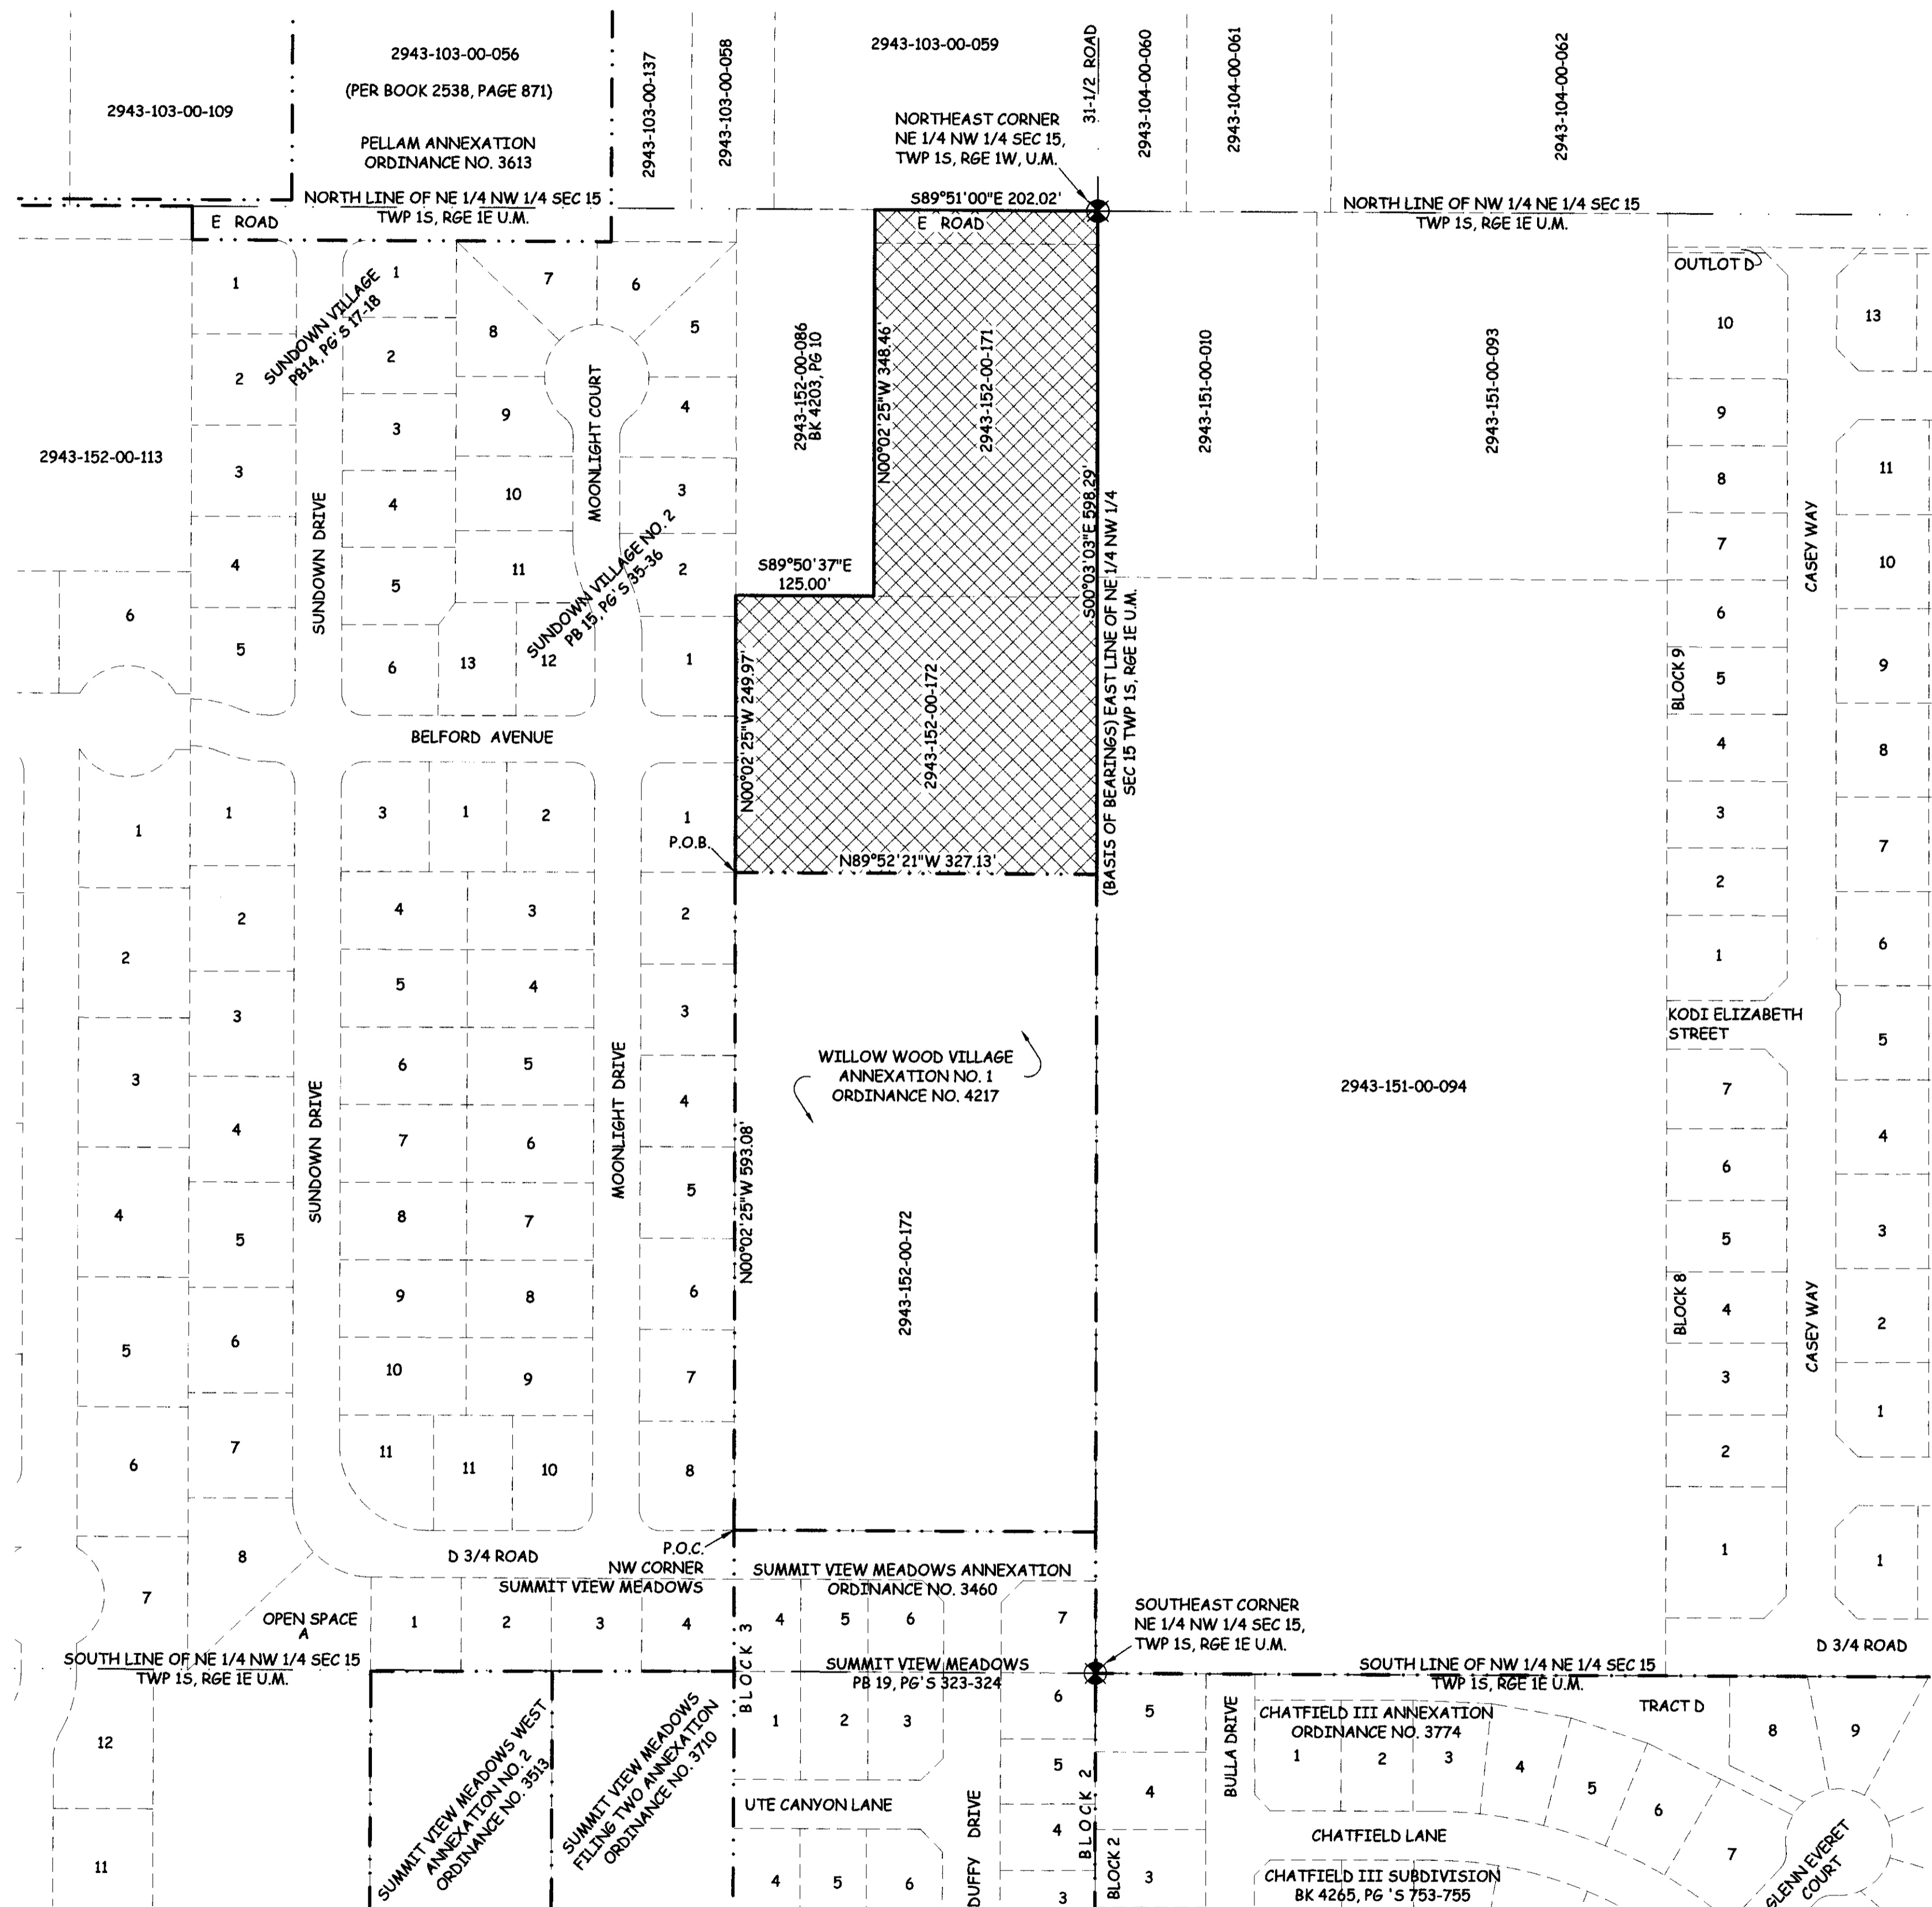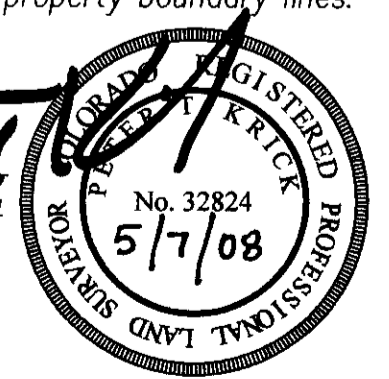

### AREA OF ANNEXATION

ANNEXATION PERIMETER	1,850.87 FT
CONTIGUOUS PERIMETER	327.13 FT
AREA IN SQUARE FEET	152,149.65***
AREA IN ACRES	3.49

### LEGEND


ANNEXATION BOUNDARY	---
EXISTING CITY LIMITS	---

\*\*\*CONTAINS 6,060.60 SQUARE FEET WITHIN PUBLIC RIGHTS OF WAY

**Notice:**  
According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown herein.

DRAWN BY	J.K.T.	DATE	02-19-08
DESIGNED BY		DATE	
CHECKED BY	P.T.K.	DATE	
APPROVED BY		DATE	

### GRAPHIC SCALE

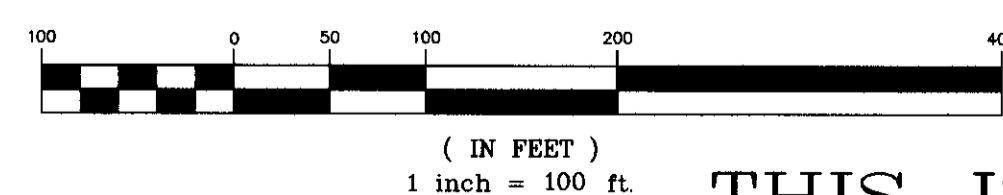

ORDINANCE NO.

4218

EFFECTIVE DATE

June 6th, 2008

THIS IS NOT A BOUNDARY SURVEY



PUBLIC WORKS  
AND UTILITIES  
REAL ESTATE DIVISION

WILLOW WOOD VILLAGE  
ANNEXATION NO. 2