
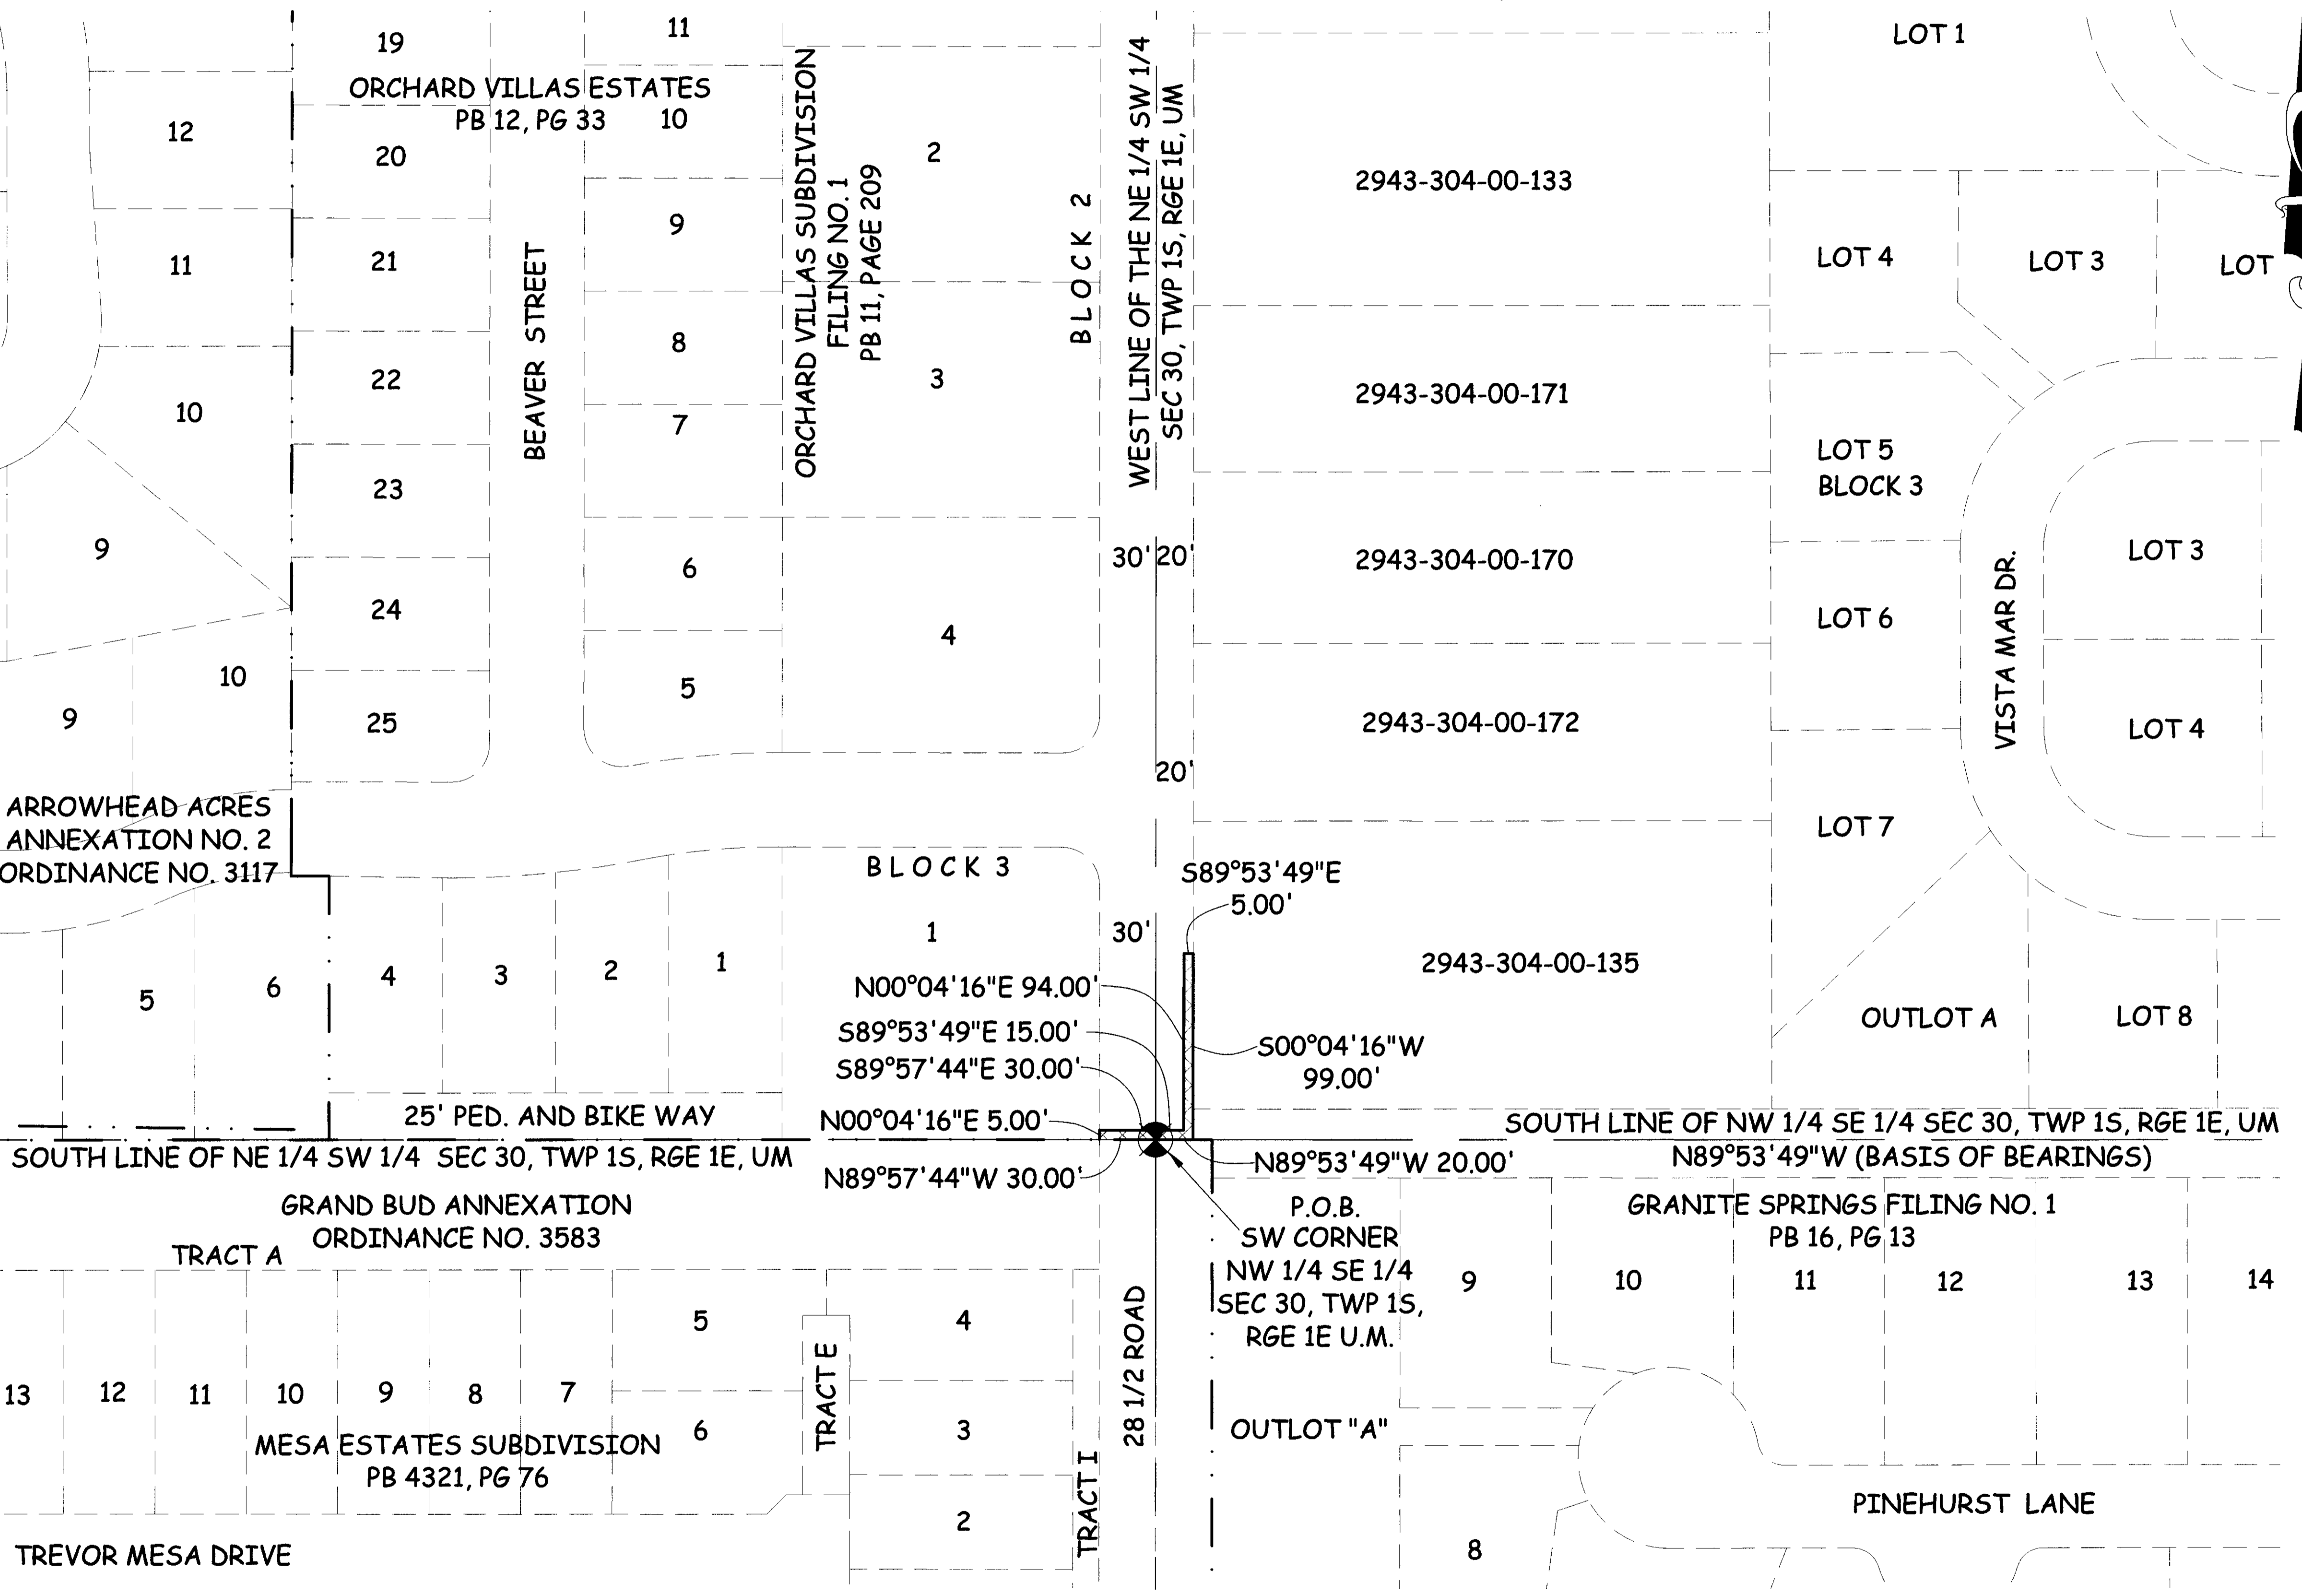


SCHUCKMAN ANNEXATION NO. 1

SITUATE IN THE NW 1/4 SE 1/4 AND THE NE 1/4 SW 1/4 OF SECTION 30, T1S, R1E, U.M.
COUNTY OF MESA, STATE OF COLORADO

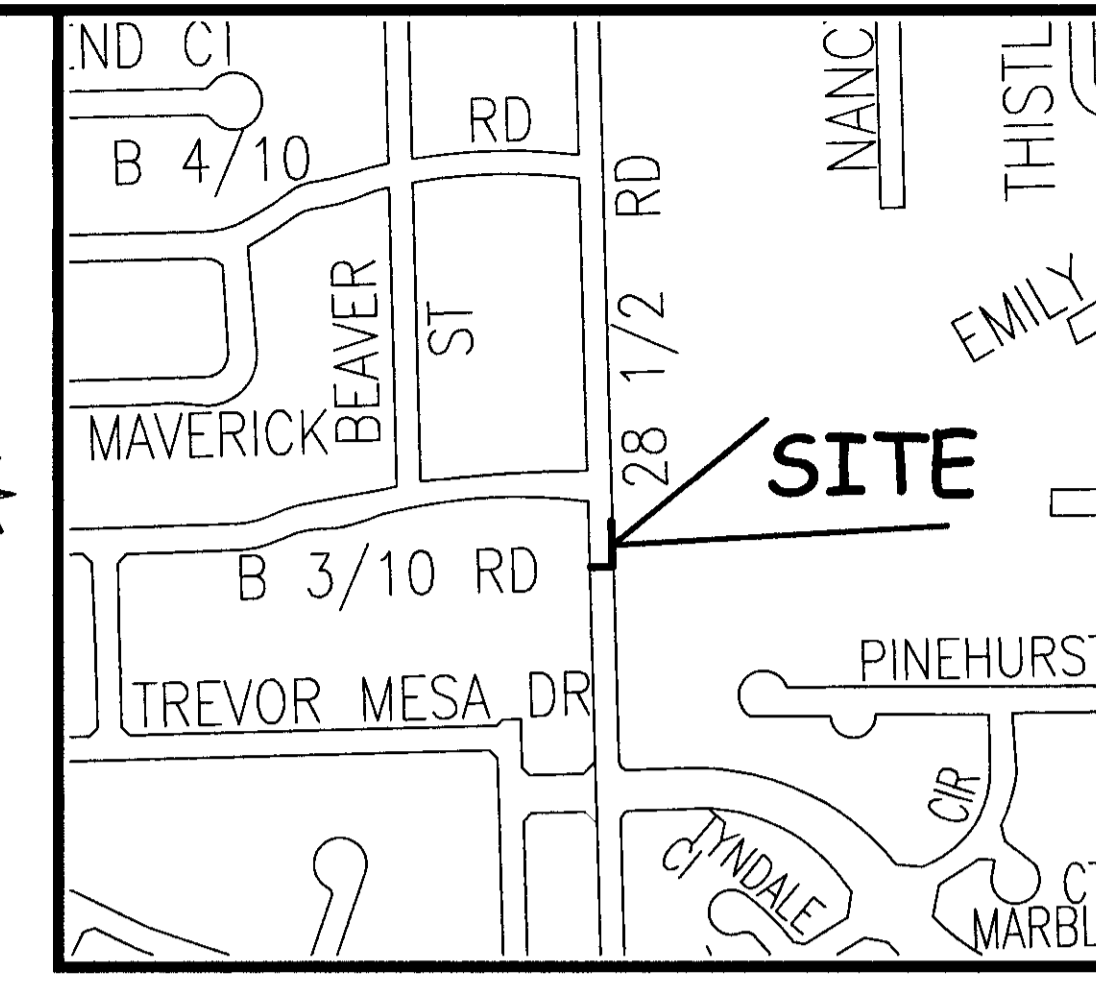

LEGAL DESCRIPTION


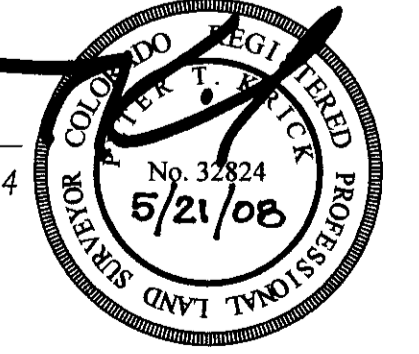
A certain parcel of land located in the Northwest Quarter of the Southeast Quarter (NW 1/4 SE 1/4) of Section 30, Township One South, Range One East of the Ute Meridian, County of Mesa, State of Colorado and being more particular described as follows:

Beginning at the Southwest corner of the NW 1/4 SE 1/4 of said Section 30 and assuming the South line of the NW 1/4 SE 1/4 of said Section 30 to bear N89°53'49"W with all bearings contained herein relative thereto; thence N89°57'44"W a distance of 30.00 feet along South line of the NE 1/4 SW 1/4 of said Section 30, said line also being the North line of Grand Bud Annexation, Ordinance No. 3583, City of Grand Junction to the Southeast corner of Lot 1 of Orchard Villas Subdivision Filing No. 1, as same is recorded in Plat Book 11, Page 209, public records of Mesa County, Colorado; thence N00°04'16"E a distance of 5.00 feet along a line being 30.00 feet West and parallel with the West line of the NE 1/4 SW 1/4 of said Section 30, said line also being the East line of Lot 1 of said Orchard Villas Subdivision Filing No. 1; thence S89°57'44"E a distance of 30.00 feet along a line being 5.00 feet North and parallel with the South line of the NE 1/4 SW 1/4 of said Section 30; thence S89°53'49"E a distance of 15.00 feet along a line being 5.00 feet North and parallel with the South line of the NW 1/4 SE 1/4 of said Section 30; thence N00°04'16"E a distance of 94.00 feet along a line being 15.00 feet East and parallel with the West line of the NE 1/4 SW 1/4 of said Section 30; thence S89°53'49"E a distance of 5.00 feet; thence S00°04'16"W a distance of 99.00 feet along a line being 20.00 feet East and parallel with the West line of the NE 1/4 SW 1/4 of said Section 30, to a point on the South line of the NW 1/4 SE 1/4 of said Section 30; thence N89°53'49"W a distance of 20.00 feet along the South line of the NW 1/4 SE 1/4 of said Section 30, said line also being the North line of said Grand Bud Annexation to the Point of Beginning.

ABBREVIATIONS

P.O.C.	POINT OF COMMENCEMENT
P.O.B.	POINT OF BEGINNING
R.O.W.	RIGHT OF WAY
SEC.	SECTION
TWP.	TOWNSHIP
RGE.	RANGE
U.M.	UTE MERIDIAN
NO.	NUMBER
SQ. FT.	SQUARE FEET
Δ	CENTRAL ANGLE
RAD	RADIUS
AL	ARC LENGTH
CHL	CHORD LENGTH
CHB	CHORD BEARING
BLK	BLOCK
PB	PLAT BOOK
BK	BOOK
PG	PAGE

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.




 PETER T. KRICK, PLS No. 32824
 Professional Land Surveyor for the
 City of Grand Junction
 DATE: May 21st, 2008

AREA OF ANNEXATION

ANNEXATION PERIMETER	297.77 FT
CONTIGUOUS PERIMETER	50.00 FT.
AREA IN SQUARE FEET	719.93***
AREA IN ACRES	0.02

LEGEND

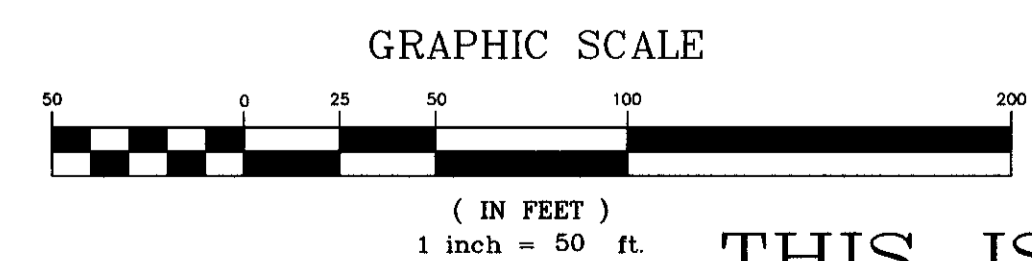ANNEXATION BOUNDARY	—————
EXISTING CITY LIMITS



ORDINANCE NO.
 4236
EFFECTIVE DATE
 June 20th, 2008

THIS IS NOT A BOUNDARY SURVEY

<p>Notice: According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown hereon.</p>		<p>DRAWN BY J.K.T. DATE 02-12-08</p> <p>DESIGNED BY _____ DATE _____</p> <p>CHECKED BY P.T.K. DATE _____</p> <p>APPROVED BY _____ DATE _____</p>	<p>SCALE</p> <p>1" = 50'</p>
---	--	--	-------------------------------------



**PUBLIC WORKS
 AND UTILITIES
 REAL ESTATE DIVISION**