


# MONUMENT VILLAGE COMMERCIAL CENTER ANNEXATION

SITUATE IN THE N 1/2 OF SECTION 23, T11S, R101W, 6TH P.M.  
COUNTY OF MESA, STATE OF COLORADO

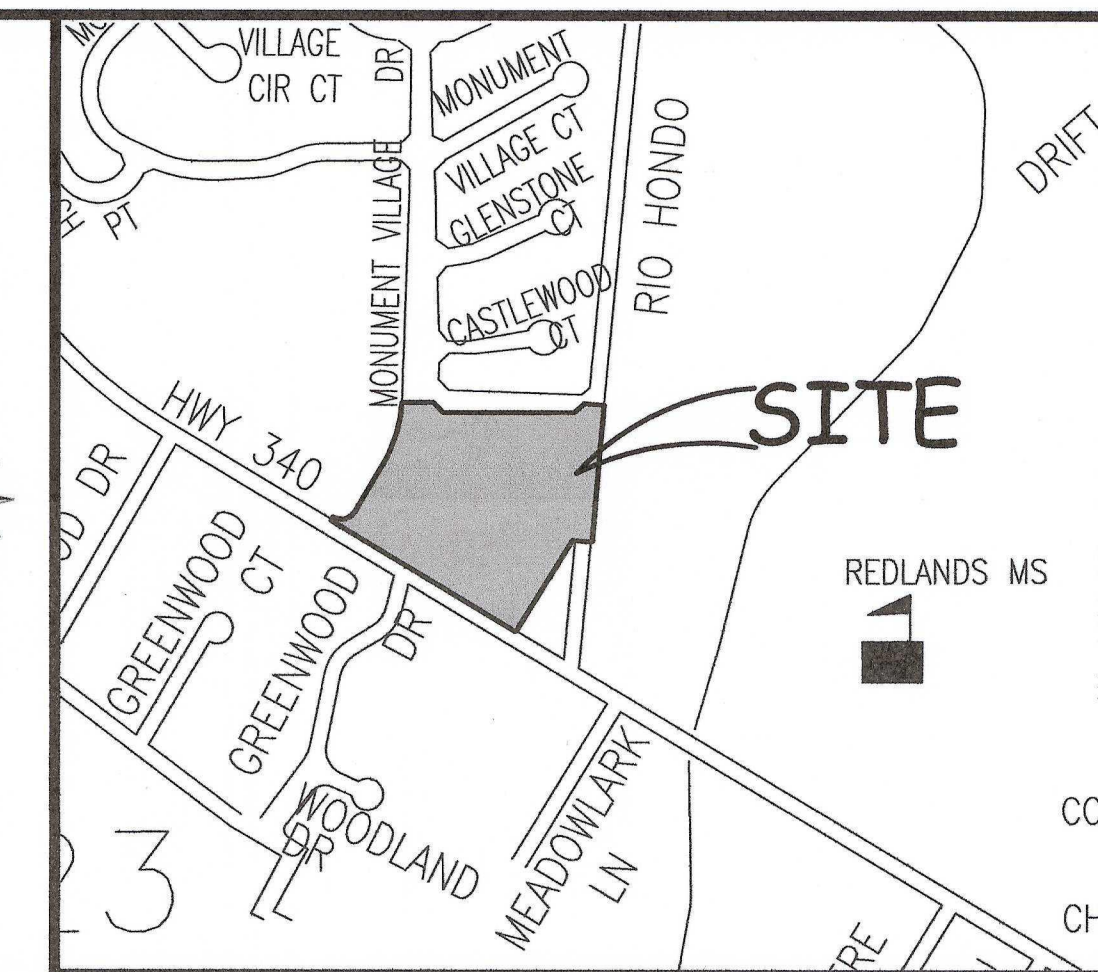

LOCATION MAP: NOT-TO-SCALE

## LEGAL DESCRIPTION

A certain parcel of land located in the North Half (N 1/2) of Section 23, Township Eleven South (11S), Range One Hundred One West (101W) of the 6th Principal Meridian, County of Mesa, State of Colorado and being more particularly described as follows:



Beginning at the Southeast corner of Block 1 of Monument Village Commercial Center, as same is recorded in Plat Book 17, Page 396, public records of Mesa County, Colorado and assuming the Easterly line of Block 1 of said Monument Village Commercial Center to bear S31°49'46"W with all bearings contained herein relative thereto; thence N59°06'25"W a distance of 549.53 feet along the Northerly Right of Way of Colorado State Highway 340; thence N30°53'25"E a distance of 10.24 feet along the Northerly line of Ace Hardware Annexation No. 2, Ordinance No. 3831, City of Grand Junction to a point on the Southerly line of Monument Village Shopping Center Filing 2, as same is recorded in Plat Book 15, Pages 59 through 60 inclusive of the Mesa County, Colorado public records; thence along the Easterly line of Lot 2 of said Monument Village Shopping Center Filing 2 the following three (3) courses: (1) 62.83 feet along the arc of a 40.00 foot radius curve, concave Northwest, having a central angle of 89°59'39" and a chord bearing N75°58'15"E a distance of 56.57 feet; (2) N30°58'06"E a distance of 135.67 feet; (3) 171.78 feet along the arc of a 357.69 foot radius curve, concave Northwest, having a central angle of 27°30'55" and a chord bearing N17°12'52"E a distance of 170.13 feet; thence N89°46'42"E a distance of 80.12 feet to a point on the Westerly line of Lot 1 of Monument Village Filing No. 6, as same is recorded in Plat Book 18, Page 85 of the Mesa County, Colorado public records; thence along the South line of said Monument Village Filing No. 6 the following three (3) courses: (1) S43°42'08"E a distance of 36.28 feet; (2) N89°46'42"E a distance of 335.90 feet; (3) N47°21'37"E a distance of 33.73 feet to a point on the West Right of Way of Rio Hondo Road, as same is recorded in Book 945, Page 602 of the Mesa County, Colorado public records; thence S85°03'29"E a distance of 50.00 feet to a point on the said East Right of Way of Rio Hondo Road; thence S04°56'31"W a distance of 350.32 feet along the East Right of Way of said Rio Hondo; thence N85°03'29"W a distance of 50.00 feet to a point on the West Right of Way of said Rio Hondo; thence S31°49'46"W a distance of 273.88 feet to the Point of Beginning.

ABBREVIATIONS

P.O.C.	POINT OF COMMENCEMENT
P.O.B.	POINT OF BEGINNING
R.O.W.	RIGHT OF WAY
SEC.	SECTION
TWP.	TOWNSHIP
RGE.	RANGE
U.M.	UTE MERIDIAN
NO.	NUMBER
SQ. FT.	SQUARE FEET
Δ=	CENTRAL ANGLE
RAD	RADIUS
AL	ARC LENGTH
CHL	CHORD LENGTH
CHB	CHORD BEARING
BLK	BLOCK
PB	PLAT BOOK
BK	BOOK
PG	PAGE

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

*Peter T. Krick*  
 PETER T. KRICK, PLS No. 32824  
 Professional Land Surveyor for the  
 City of Grand Junction  
 DATE: August 4th, 2009

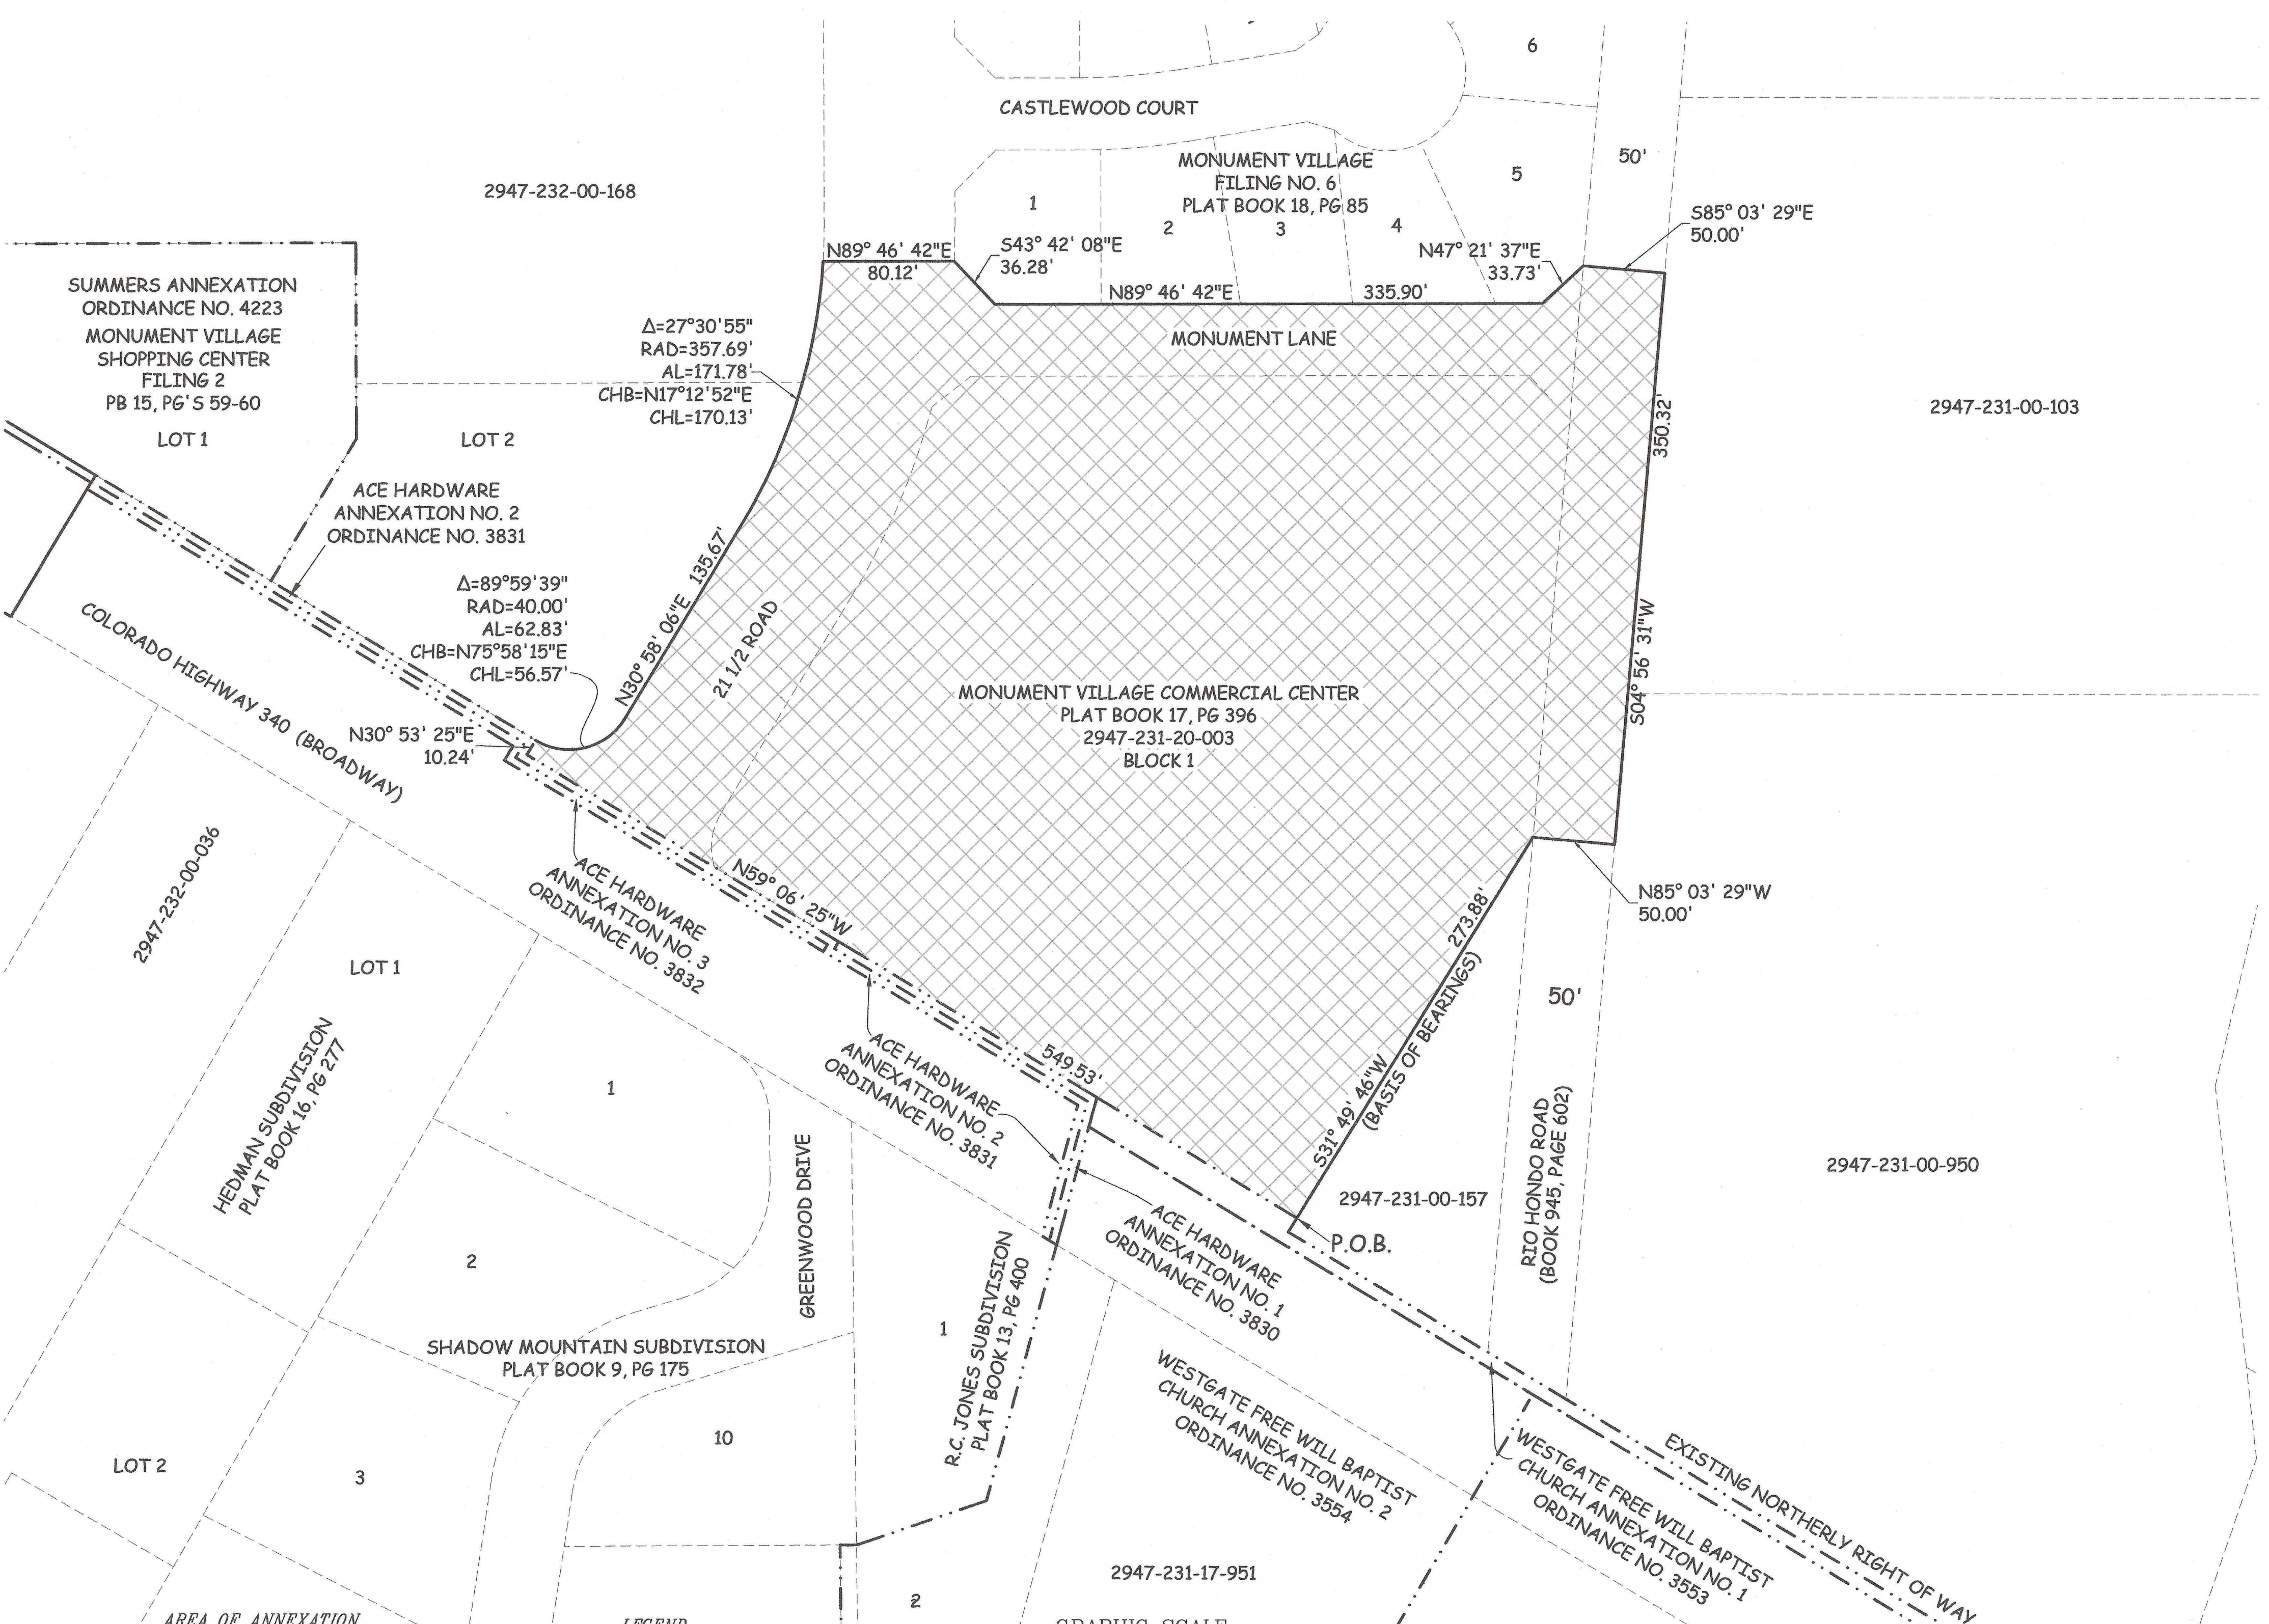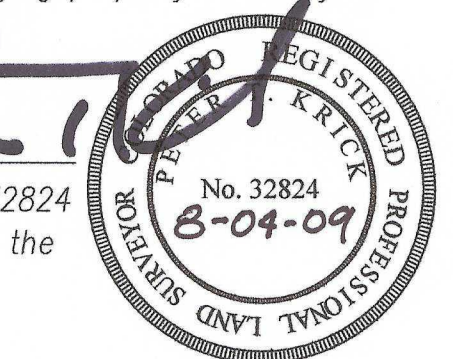


AREA OF ANNEXATION

ANNEXATION PERIMETER	2,140.28 FT
CONTIGUOUS PERIMETER	559.77 FT
AREA IN SQUARE FEET	251,451.33***
AREA IN ACRES	5.77

\*\*\*CONTAINS 66,936.61 SQ. FT (1.54 ACRES) WITHIN PUBLIC RIGHTS OF WAY

LEGEND

ANNEXATION BOUNDARY	———
EXISTING CITY LIMITS	- - - - -

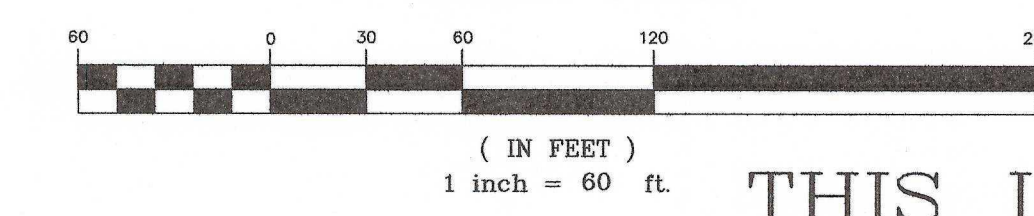

ORDINANCE NO.  
4368

EFFECTIVE DATE  
SEPTEMBER 4th, 2009

THIS IS NOT A BOUNDARY SURVEY

Notice:  
According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown hereon.

DRAWN BY	J.K.T.	DATE	5-27-09
DESIGNED BY	_____	DATE	_____
CHECKED BY	P.T.K.	DATE	_____
APPROVED BY	_____	DATE	_____

SCALE

1" = 60'
----------



PUBLIC WORKS  
AND UTILITIES  
REAL ESTATE DIVISION

MONUMENT VILLAGE COMMERCIAL CENTER ANNEXATION