


ROHNER ANNEXATION

SITUATE IN THE NE 1/4 SE 1/4 AND SE 1/4 NE 1/4 SECTION 30, TWP 1S, RGE 1E, U.M. COUNTY OF MESA, STATE OF COLORADO

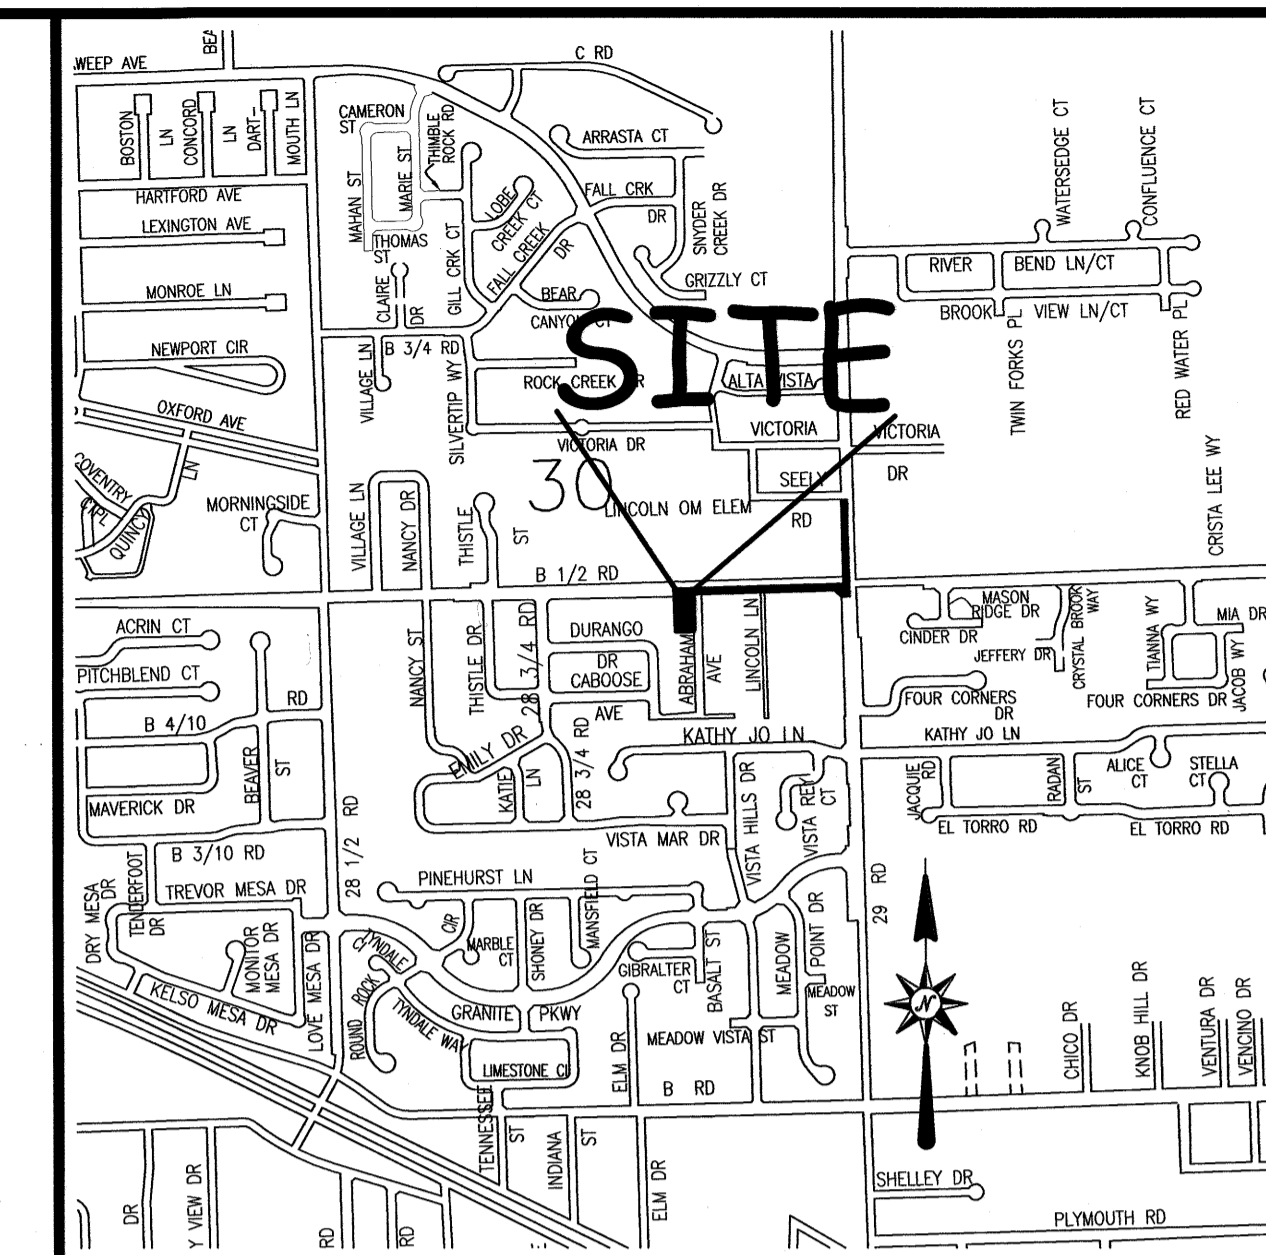

LOCATION MAP: NOT-TO-SCALE

DESCRIPTION

A certain parcel of land lying in the Southeast Quarter of the Northeast Quarter (SE 1/4 NE 1/4) and the Northeast Quarter of the Southeast Quarter (NE 1/4 SE 1/4) of Section 30, Township 1 South, Range 1 East of the Ute Principal Meridian, County of Mesa, State of Colorado and being more particularly described as follows:



BEGINNING at the West Quarter (W 1/4) corner of said Section 30 and assuming the South line of the SE 1/4 NE 1/4 of said Section 30 bears S 89°56'51" W with all other bearings contained herein being relative thereto; thence from said Point of Beginning, N 00°11'59" W along the East line of the SE 1/4 NE 1/4 of said Section 30, a distance of 443.59 feet; thence S 89°56'51" W a distance of 30.00 feet West of and parallel with, the East line of the SE 1/4 NE 1/4 of said Section 30, a distance of 384.52 feet; thence S 44°30'47" W along the West right of way for 29 Road, being a line 30.00 feet West of and parallel with, the East line of the SE 1/4 NE 1/4 of said Section 30, a distance of 40.54 feet; thence S 00°03'09" E a distance of 30.00 feet to a point on the North line of the NE 1/4 SE 1/4 of said Section 30; thence S 89°56'51" W, along the North line of the NE 1/4 SE 1/4 of said Section 30, a distance of 810.11 feet; thence S 00°03'13" E along the West line of the 2885 B-1/2 Road Condominium, as same is recorded in Book 3560, Page 967, Public Records of Mesa County, Colorado, a distance of 238.71 feet; thence S 89°56'00" E along the South line of said Condominium, a distance of 142.00 feet to a point on the East right of way for Abraham Avenue; thence N 00°03'13" W along the East right of way for Abraham Avenue, a distance of 209.01 feet to a point on the South right of way for B-1/2 Road; thence N 89°56'51" E along said South right of way, being a line 30.00 feet South of and parallel with the North line of the NE 1/4 SE 1/4 of said Section 30, a distance of 664.70 feet; thence S 45°06'58" E, along the South right of way for B-1/2 Road, a distance of 45.41 feet; thence N 00°10'55" W a distance of 32.08 feet; thence N 89°56'51" E, a distance of 30.00 feet to a point on the East line of the NE 1/4 SE 1/4 of said Section 30; thence N 00°10'55" W, along the East line of the NE 1/4 SE 1/4 of said Section 30, a distance of 30.00 feet, more or less, to the Point of Beginning.

- ABBREVIATIONS
- P.O.C. POINT OF COMMENCEMENT
 - P.O.B. POINT OF BEGINNING
 - R.O.W. RIGHT OF WAY
 - SEC. SECTION
 - TWP. TOWNSHIP
 - RGE. RANGE
 - U.M. UTE MERIDIAN
 - NO. NUMBER
 - SQ. FT. SQUARE FEET
 - Δ= CENTRAL ANGLE
 - RAD. RADIUS
 - AL. ARC LENGTH
 - CHL. CHORD LENGTH
 - CHB. CHORD BEARING
 - BLK. BLOCK
 - PB. PLAT BOOK
 - BK. BOOK
 - PG. PAGE

The Description(s) contained herein have been derived from subdivision plats and deed descriptions as they appear in the office of the Mesa County Clerk and Recorder. This plat does not constitute a legal survey, and is not intended to be used as a means for establishing or verifying property boundary lines.

PETER T. KRICK, PLS No. 32824
Professional Land Surveyor for the
City of Grand Junction

DATE: October 19th, 2012

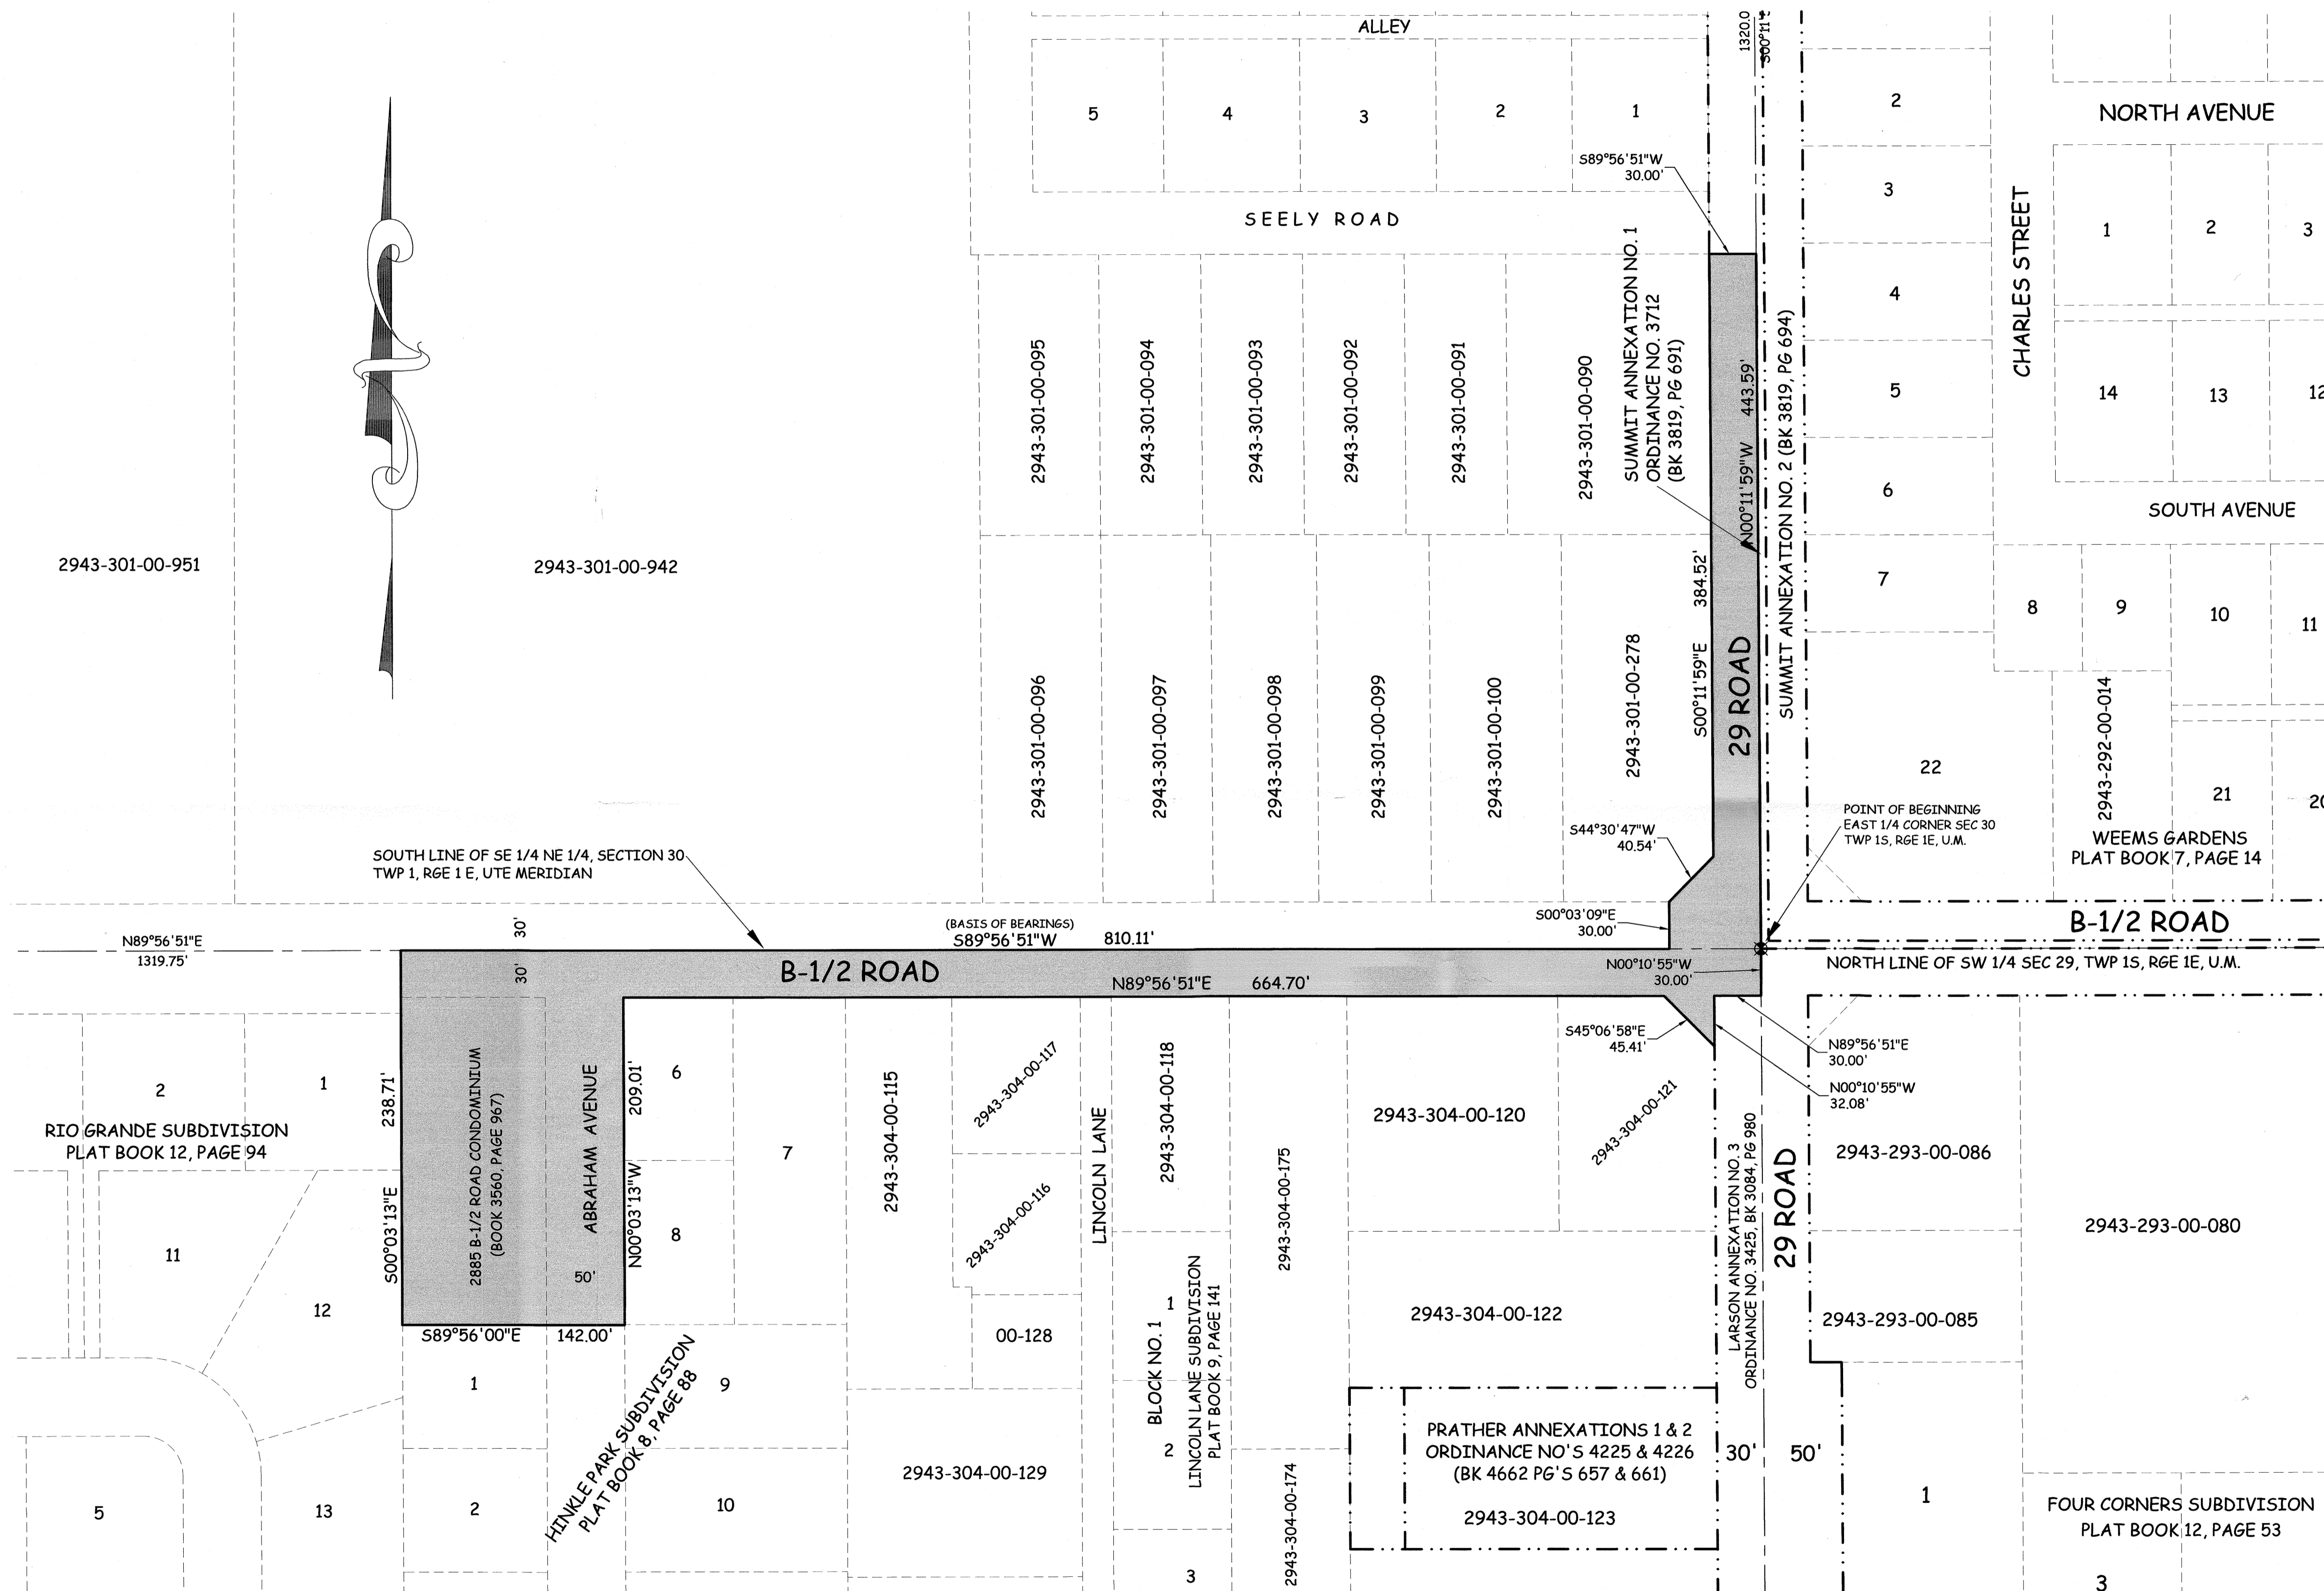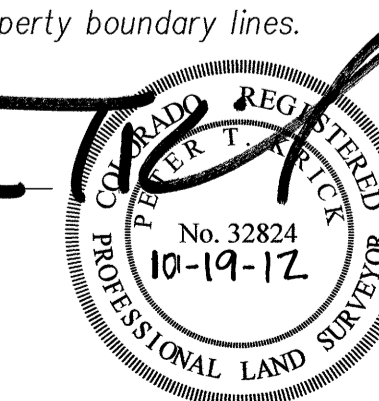


AREA OF ANNEXATION

ANNEXATION PERIMETER	3,130.48 FT
CONTIGUOUS PERIMETER	565.47 FT
AREA IN SQUARE FEET	70,805***
AREA IN ACRES	1.63

LEGEND

- ANNEXATION BOUNDARY
- EXISTING CITY LIMITS

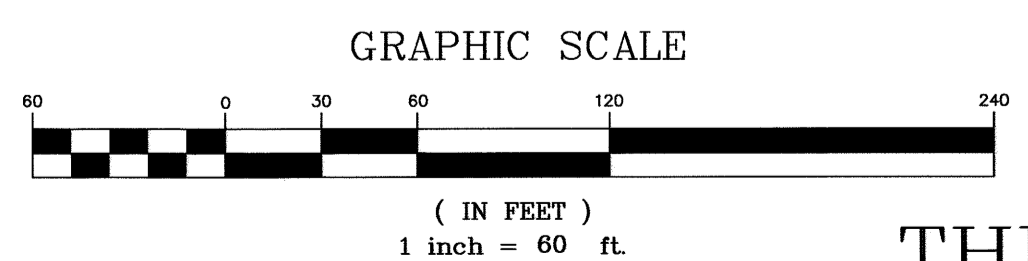

ORDINANCE NO.
4555

EFFECTIVE DATE
November 18th, 2012


THIS IS NOT A BOUNDARY SURVEY

N:\Cadd\Annex by PTK\Rohner Annexation.dwg 08/07/2012

Notice:
According to Colorado law you must commence any legal action based upon any defect in this survey within three years after you first discover such defect. In no event may any action based upon any defect in this survey be commenced more than ten years from the date of the certification shown hereon.

DRAWN BY P.T.K. DATE 08-07-2012
DESIGNED BY DATE
CHECKED BY P.T.K. DATE
APPROVED BY DATE

SCALE
1" = 60'

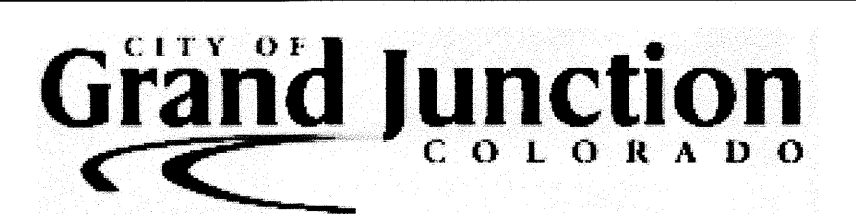

PUBLIC WORKS AND UTILITIES
ENGINEERING DIVISION
SURVEY DEPARTMENT

ROHNER ANNEXATION