


- NOTES**
- 1 All asphalt pavement to be cut with neat edges
  - 2 All backfill to be compacted back in lifts of not more than 6" to a density of 95%
  - 3 12" gravel base to be compacted to 95% density before hot mix bituminous pavement is replaced
  - 4 All asphalt to be replaced with hot mix bituminous pavement

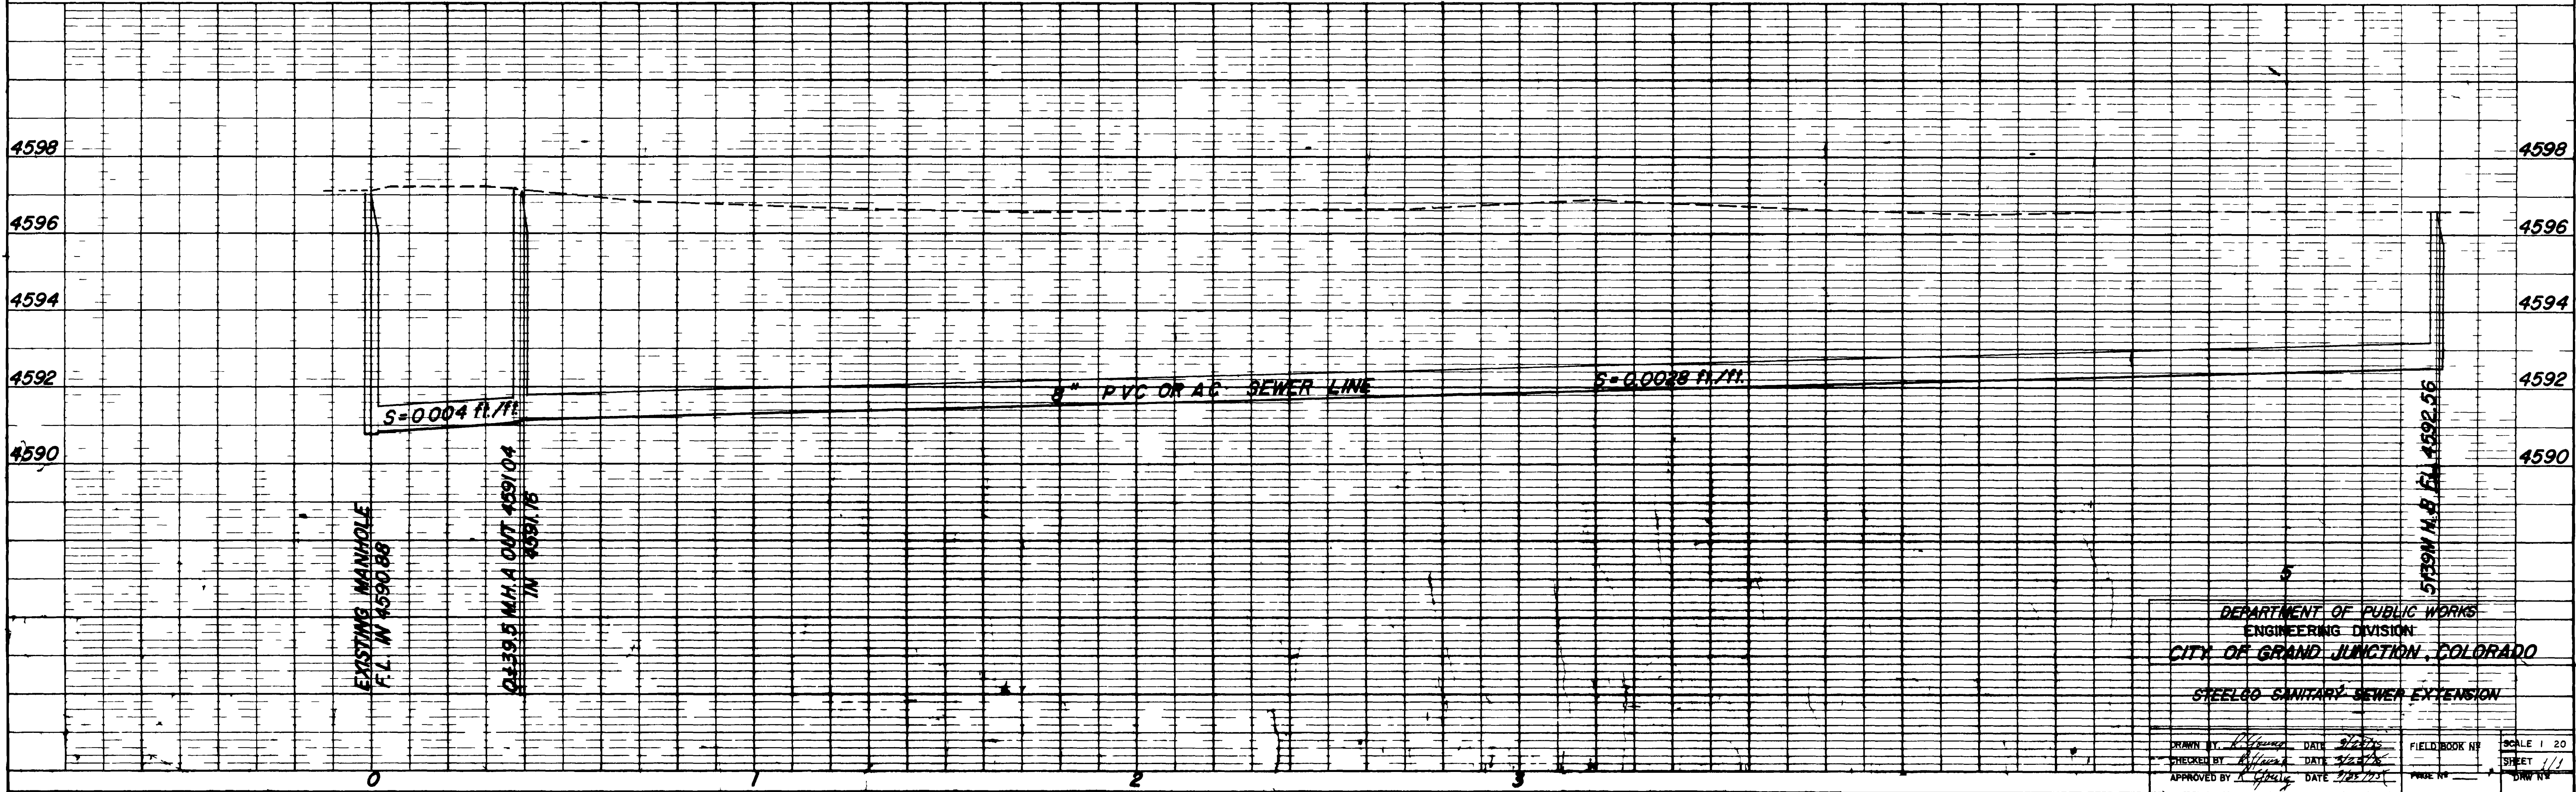

DEPARTMENT OF PUBLIC WORKS  
 ENGINEERING DIVISION  
 CITY OF GRAND JUNCTION, COLORADO  
 STEELCO SANITARY SEWER EXTENSION

DRAWN BY: *[Signature]* DATE: 2/25/76  
 CHECKED BY: *[Signature]* DATE: 3/2/76  
 APPROVED BY: *[Signature]* DATE: 3/25/76

FIELD BOOK # \_\_\_\_\_ SCALE 1" = 20'  
 SHEET # 111  
 PAGE # \_\_\_\_\_ DRAW # \_\_\_\_\_