
































11/25/2024 11:38:13 A:\Autodesk Docs\Grand Junction Community Recreation Center\2023057_GJCRC_ELEC_R24.rvt

TECHNOLOGY LEGEND AND ABBREVIATIONS

COMMUNICATIONS SYMBOLS

| | | |
|---|--|---|
|  | TELECOMMUNICATIONS OUTLET A - (1) DATA B - (1) DATA / (1) COAX C - (1) VOICE / (1) DATA D - (1) VOICE / (2) DATA E - (1) VOICE / (3) DATA W - (1) VOICE, WITH WALL MOUNT COVER |  |
|  | IN-FLOOR TELECOMMUNICATIONS OUTLET (VOICE/DATA/OTHER AS DEFINED ABOVE). LOCATE IN COMMON FLOOR BOX (WITH DIVIDER) WHERE SHOWN ADJACENT TO FLOOR 120 VOLT RECEPTACLE(S). | |
|  | CLOSED-CIRCUIT TELEVISION CAMERA | |
|  | CENTRALLY ACCESS CONTROLLED DOOR | |
|  | ACCESS CONTROL SYSTEM CARD READER | |
|  | ACCESS CONTROL SYSTEM CARD READER/KEYPAD COMBINATION DEVICE | |
|  | DOOR CONTACT | |
|  | ELECTRIC LOCK | |
|  | KEY PAD | |
|  | MAGNETIC LOCK | |
|  | DOOR BELL CHIME | |
|  | WIRELESS ACCESS POINT. PROVIDE (1) DATA CABLE TERMINATED ABOVE CEILING (SEE DETAIL) | |
|  | IN-FLOOR COMBINATION RECEPTACLE/COMMUNICATIONS DEVICE | |
|  | PLUGMOLD (LENGTH AS SHOWN ON DRAWING) | |
|  | SURFACE RACEWAY | |
|  | CABLE TRAY (LENGTH AS SHOWN ON DRAWING) | |
|  | CONDUIT END BUSHING | |
|  | CONDUIT UP | |
|  | CONDUIT DOWN | |
|  | CONDUIT BREAK SYMBOL | |






AUDIO VISUAL SYMBOLS

| | |
|---|------------------------------------|
|  | CEILING SPEAKER |
|  | WALL MOUNTED SPEAKER |
| FOR EACH OF THE SYMBOLS BELOW, PROVIDE DOUBLE-GANG JUNCTION BOX WITH SINGLE GANG PLASTER RING AND 1" CONDUIT TO ABOVE THE ACCESSIBLE CEILING. | |
|  | INTERCOM STATION |
|  | VOLUME CONTROL STATION |
|  | MICROPHONE INPUT PLATE |
|  | AUDIO VISUAL CONTROL PANEL/SURFACE |
|  | AMPLIFIER |
|  | BLUETOOTH RECEIVER |
|  | BROADCAST CAMERA |
|  | HDMI INPUT PLATE |

LEGEND NOTES

- A. NOT ALL SYMBOLS SHOWN ON THIS LEGEND WILL NECESSARILY BE USED ON THE ELECTRICAL DRAWINGS.
- B. INDICATED MOUNTING HEIGHTS ARE FROM FINISHED FLOOR (OR FINISHED GRADE).
- C. FOR DEVICES INDICATED AS ABOVE COUNTER (AC) ON THE DRAWINGS, COORDINATE MOUNTING HEIGHT WITH THE ARCHITECT.
- D. SPECIFIC MOUNTING HEIGHTS SHOWN ON THE DRAWINGS SUPERSEDE MOUNTING HEIGHTS SHOWN ON DETAIL.
- E. DEVICES AND SYMBOLS ARE NOT NECESSARILY SHOWN TO SCALE.


REFERENCE SYMBOLS

| | |
|---|---------------------------|
|  | EQUIPMENT DESIGNATION |
|  | REVISION DESIGNATION |
|  | KEY NOTE DESIGNATION |
|  | ENLARGED PLAN DESIGNATION |
|  | NORTH ARROW |

ABBREVIATIONS

| | |
|-------|---|
| A | AMPERE(S) |
| AC | ABOVE COUNTER |
| AFC | ABOVE FINISHED CEILING |
| AFF | ABOVE FINISHED FLOOR |
| AFG | ABOVE FINISHED GRADE |
| AFI | ARC FAULT CIRCUIT INTERRUPTER |
| AIC | AMPERES INTERRUPTING CURRENT |
| ATS | AUTOMATIC TRANSFER SWITCH |
| C | CONDUIT |
| CATV | CABLE TELEVISION |
| CB | CIRCUIT BREAKER |
| CKT | CIRCUIT |
| DISC | DISCONNECT |
| DIST | DISTRIBUTION |
| (E) | EXISTING, TO REMAIN - MAINTAIN TERMINATION AND PATHWAY CONTINUITY TO EXISTING DEVICES. |
| EC | ELECTRICAL CONTRACTOR OR EMPTY CONDUIT |
| (ER) | EXISTING TO RELOCATE - TERMINATION AND PATHWAY CONTINUITY TO DEVICES. REMOVE, RELOCATE OR REWORK ANY CONDUIT AND WIRING TO FACILITATE NEW CONSTRUCTION. |
| EM | EMERGENCY |
| EPO | EMERGENCY POWER OFF |
| (EX) | EXISTING, REMOVE - REMOVE, RELOCATE OR REWORK ANY TERMINATIONS AND PATHWAY TO FACILITATE NEW CONSTRUCTION. |
| G | GROUND |
| GC | GENERAL CONTRACTOR |
| GFI | GROUND FAULT CIRCUIT INTERRUPTER |
| HORIZ | HORIZONTAL |
| HP | HORSEPOWER |
| IDF | INTERMEDIATE DATA FRAME |
| IG | ISOLATED GROUND |
| KV | KILOVOLTS |
| KVA | KILOVOLT AMPERE(S) |
| KW | KILOWATT(S) |
| LTG | LIGHTING |
| MC | MECHANICAL CONTRACTOR |
| MCA | MINIMUM CIRCUIT AMPS |
| MCB | MAIN CIRCUIT BREAKER |
| MDC | MAIN DISTRIBUTION CENTER |
| MDF | MAIN DATA FRAME |
| MLO | MAIN LUGS ONLY |
| MV | MEDIUM VOLTAGE |
| NL | NIGHT LIGHT/SECURITY LIGHT. CONNECT LIGHTS AHEAD OF LOCAL SWITCHING TO OPERATE CONTINUOUSLY |
| OAE | OR APPROVED EQUAL |
| OH | OVERHEAD |
| P | POLE |
| PH | PHASE |
| PNL | PANEL |
| REC | RECEPTACLE |
| (RL) | RELOCATE - MAINTAIN TERMINATION AND PATHWAY CONTINUITY TO NEW LOCATION OF EXISTING DEVICE(S). |
| SW | SWITCH |
| TBB | TELECOMMUNICATIONS BONDING BACKBONE |
| TGB | TELECOMMUNICATIONS GROUNDING BUSBAR |
| TMGB | TELECOMMUNICATIONS MAIN GROUNDING BUSBAR |
| TV | TELEVISION - REFER TO DETAILS FOR ADDITIONAL INFORMATION |
| UC | UNDERCOUNTER/CABINET |
| UG | UNDERGROUND |
| UON | UNLESS OTHERWISE NOTED |
| V | VOLT(S) |
| VA | VOLT AMPERES |
| W | WATT(S) OR WIRE |
| WG | WIRE GUARD |
| WP | WEATHERPROOF |
| XFMR | TRANSFORMER |

TECHNOLOGY GENERAL NOTES

- A. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO VISIT THE SITE PRIOR TO BID TO VERIFY DIMENSIONS AND BECOME FAMILIAR WITH THE EXISTING CONDITIONS. NO EXTRAS WILL BE GIVEN FOR ADDITIONAL WORK WHICH IS REQUIRED RESULTING FROM CONTRACTOR'S FAILURE TO BECOME FAMILIARIZED WITH THE SITE AND FACILITIES.
- B. COORDINATE EXACT LOCATIONS OF ALL OUTLETS WITH ARCHITECTURAL ELEVATIONS, REFLECTED CEILING PLANS (WHERE SHOWN), CASEWORK SHOP DRAWINGS, AND EQUIPMENT INSTALLATION DRAWINGS PRIOR TO BEGINNING ROUGH-IN.
- C. PROVIDE A SET OF CONSTRUCTION DOCUMENTS TO THE OWNER AND SCHEDULE A MEETING WITH THE OWNER FOR VERIFICATION OF ALL ENGRAVED NAMEPLATES, ROOM NAMES/NUMBERS AND FINAL LOCATION OF TECHNOLOGY ITEMS.
- D. NOT USED.
-  E. COORDINATE ELECTRICAL DEVICE LOCATIONS WITH CHAIR RAILS, CORNER GUARDS, DOOR TRIMS, ETC. NOTIFY ARCHITECT OF CONFLICTING LOCATIONS.
- F. THE SYSTEM BACKBOARD SHALL CONSIST OF 3/4 INCH FIRE-RETARDANT TREATED PLYWOOD INSTALLED FLOOR TO CEILING FOR THE LENGTH AS SHOWN ON THE DRAWING. ALL OUTLETS IN THE BACKBOARD SHALL BE FLUSH-MOUNTED, UON.
- G. REFER TO ARCHITECTURAL FINISH SCHEDULE FOR ROOMS REQUIRING FACEPLATES AND OTHER FINISH ITEMS TO BE SPECIFIC COLORS.




brsarch.com



GRAND JUNCTION COMMUNITY
RECREATION CENTER


GRAND JUNCTION, CO

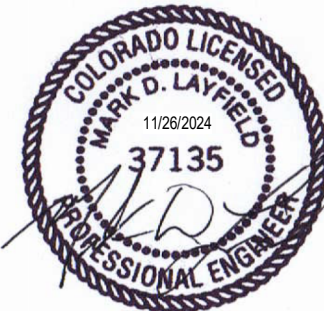



Project Number: 2023.042
Issue: CONFORMANCE SET
Date: 11/28/2024
Drawn By: R.H.
Checked By: R.H.
Revisions:
Rev. Description Date:
1 ADDENDUM #1 2024.08.15

Sheet title:
TECHNOLOGY LEGEND AND GENERAL
NOTES

T001
© 2017 Barker Rinker Seacat Architecture

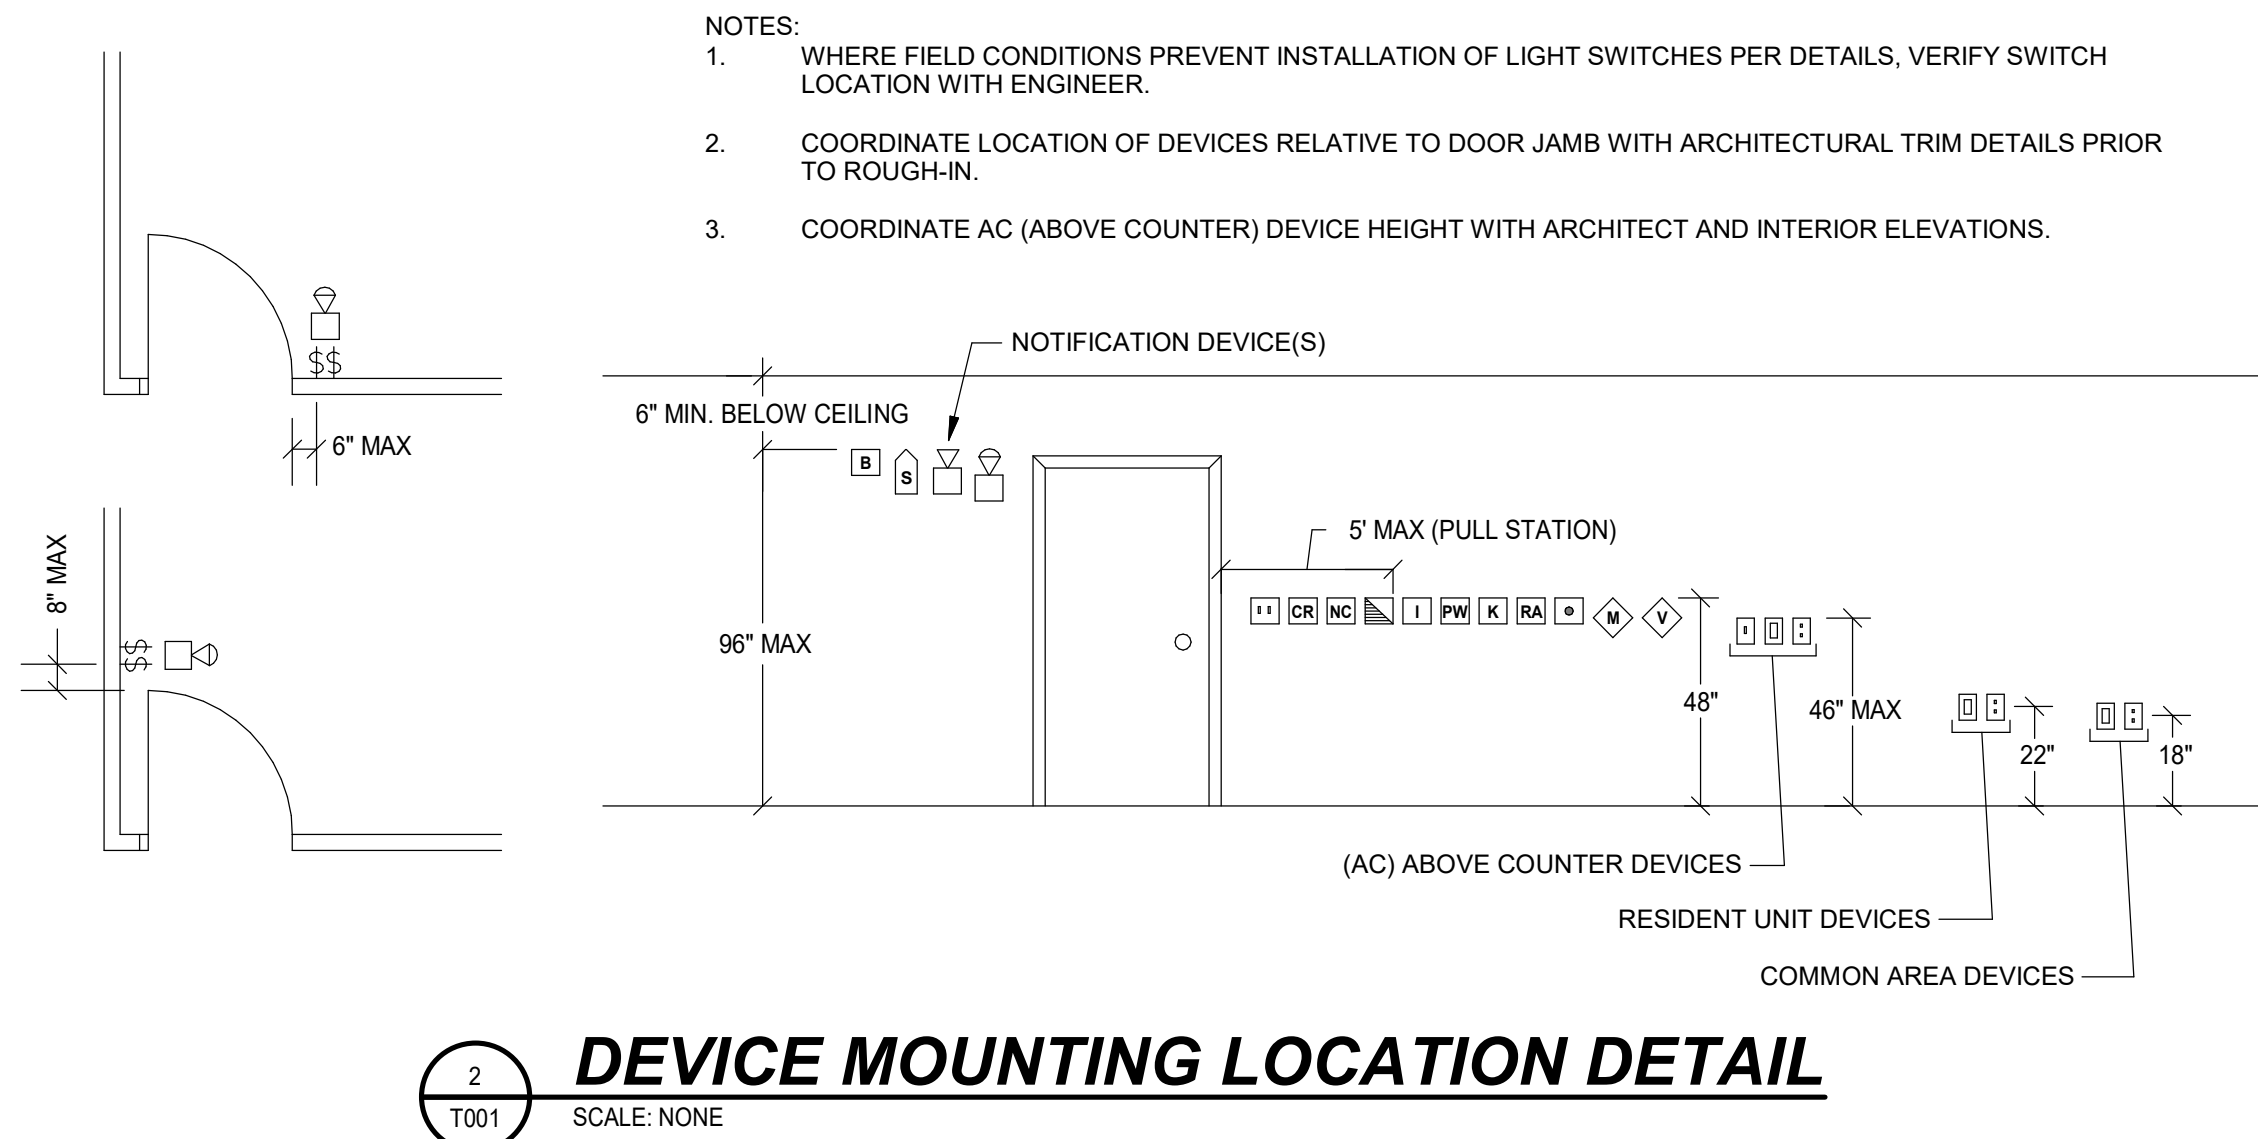

11/25/2024 11:38:17 A:\Autodesk Docs\Grand Junction Community Recreation Center\2023057_GJCRC_ELEC_R24.rvt

| TECHNOLOGY SYSTEMS NOTES AND MATRIX OF RESPONSIBILITIES | | | | |
|--|--|-----------------------------------|----------------------------------|------------------------|
| | SYSTEMS RESPONSIBILITIES (D = DESIGN TEAM, C = CONTRACTOR, OWN = OWNER OUTSIDE OF THE CONSTRUCTION SCOPE) | | | |
| | DESIGN | DOCUMENT 120V/PATHWAY/1V CABLE | PROVIDE 120V/PATHWAY/1V CABLE | FURNISH/INSTALL SYSTEM |
| TELECOMMUNICATIONS CABLE INFRASTRUCTURE | D | D | C/OWN | C/OWN |
| <p>THE CONTRACTOR SHALL PROVIDE ALL WORK TO SUPPORT AN OWNER/CITY PROVIDED TELECOMMUNICATIONS CABLE PLANT. THIS INCLUDES, BUT NOT LIMITED TO, CONDUIT PATHWAY, 120 VOLT POWER, PLYWOOD BACKBOARDS, TELECOMMUNICATIONS GROUNDING SYSTEM. COMPLY WITH TIA/EIA 569-B AND GROUNDING SYSTEM PER ANSI J-STD 607.</p> <p>THE CONTRACTOR IS REQUIRED TO PROVIDE COORDINATION WITH THE OWNER/CITY'S VENDOR IN THE FORM OF CONTACTING THE VENDOR'S REPRESENTATIVE AND INFORMING THEM OF SCHEDULE AND PROVIDING ACCESS TO THE SITE. THE OWNER/CITY SHALL PROVIDE THE CABLING, RACKS/CABLE TRAY, TERMINATING HARDWARE, TESTING AND FINAL TERMINATIONS OF THE TELECOMMUNICATIONS CABLE PLANT.</p> <p>SITE RESPONSIBILITIES ARE OUTLINED ON THE SITE PLAN.</p> <p>THE CONTRACTOR SHALL PROVIDE ALL FIRESTOPPING.</p> | | | | |
| NETWORK ELECTRONICS AND TELEPHONE SYSTEM | OWN | D | C | OWN |
| <p>ALL WORK ASSOCIATED WITH THE NETWORK ELECTRONICS TO PROVIDE CONNECTIVITY FOR PHONES, COMPUTERS, ACCESS POINTS, INTERCOM STATIONS REQUIRING AN ETHERNET PROTOCOL CONNECTION TO THE NETWORK SHALL BE BY THE OWNER/CITY.</p> <p>THE CONTRACTOR IS REQUIRED TO PROVIDE COORDINATION WITH THE OWNER'S VENDOR/CITY IN THE FORM OF CONTACTING THE VENDOR'S REPRESENTATIVE AND INFORMING THEM OF SCHEDULE AND PROVIDING ACCESS TO THE SITE.</p> | | | | |
| ACCESS CONTROL SYSTEM | D | D | C | C |
| <p>THE OWNER/CITY HAS AN ACCESS CONTROL SYSTEM THAT SHALL BE EXTENDED TO THE NEW CONSTRUCTION VIA THE LOCALWIDE AREA NETWORK. THE OWNER HAS AN EXCLUSIVE VENDOR FOR THIS SYSTEM (TOM LOGSDON, DM1 TECHNOLOGIES, PROJECT MANAGER COLORADO, 469-995-9244, TLOGSDON@DM1TECHNC.COM). ALL WORK SHALL BE PROVIDED UNDER THE CONTRACTORS' SCOPE OF WORK. ALL UPGRADES TO THE HEAD END SERVER/APPLIANCE SHALL BE PROVIDED BY THE CONTRACTOR. THE CONTRACTOR SHALL PROVIDE ALL ELECTRIC LOCKING FOR A COMPLETE SYSTEM (COORDINATE WITH DIVISION 08).</p> <p>THE CONTRACTOR SHALL PROVIDE BATTERY-RUN ACCESS CONTROL DOOR HARDWARE AT EACH DOOR AS INDICATED ON THE DRAWINGS. THESE BATTERY-RUN DOORS SHALL BE INSTALLED IN AN 'ON-LINE' MODE WITH GATEWAYS MOUNTED IN THE CEILING TO ALLOW THEM TO COMMUNICATE WITH THE HEAD END SYSTEM. THE EXACT SYSTEM HAS YET TO BE DETERMINED, BUT SALTO SYSTEMS IS A GOOD BASIS OF DESIGN.</p> <p>POWER DOOR OPERATORS SHALL BE INTERFACED WITH THE ACCESS CONTROL SYSTEM.</p> <p>LEGEND FOR  SYMBOL SHOWN ON PLANS:</p> <p>01 = DOOR LOCKED AT ALL TIMES FOR INGRESS, FREE EGRESS.</p> <p>02 = WIRELESS DOOR LOCKSET</p> <p>04 = DOOR CONTACT ONLY</p> <p>05 = GATE CONTROLS</p> <p>GW = GATEWAY DEVICE FOR WIRELESS LOCKSET TO ALLOW COMMUNICATION TO THE EAC SERVER. PROVIDE PURPLE JACKETED CAT6A CABLE.</p> | | | | |
| SECURITY CAMERA (CCTV) SYSTEM | D | D | C | C |
| <p>THE OWNER/CITY HAS A CAMERA SYSTEM THAT SHALL BE EXTENDED TO THE NEW CONSTRUCTION. THE OWNER/CITY SHALL PROVIDE CAMERAS FOR THE CONTRACTOR TO INSTALL. COORDINATE ALL CAMERA TYPES AND MOUNTING WITH THE OWNER/CITY BEFORE ROUGH-IN. ALL WORK SHALL BE PROVIDED UNDER THE CONTRACTORS' SCOPE OF WORK. ALL UPGRADES TO THE HEAD END SYSTEM AND FINAL PROGRAMMING OF THE SYSTEM SHALL BE PROVIDED BY THE OWNER.</p> <p>THERE ARE CAMERAS SHOWN ON THE SITE PLAN THAT ARE PART OF THE POLICE DEPARTMENT (ARCTIC) CAMERA SYSTEM. THESE CAMERAS SHALL BE PROVIDED AND INSTALLED BY OTHERS. THE CONTRACTOR SHALL BE RESPONSIBLE TO PROVIDE CABLE, CABLE PATHWAY AND 120 VOLT POWER TO EACH LOCATION SHOWN ON THE DRAWINGS.</p> <p>LEGEND FOR  SYMBOL SHOWN ON PLANS:</p> <p>W-01 = COLOR MINI-DOME, WALL-MOUNTED FLUSH, INTERIOR RATED CAMERA</p> <p>W-02 = COLOR MINI-DOME, WALL-MOUNTED FLUSH, EXTERIOR RATED CAMERA</p> <p>W-03 =COLOR MINI-DOME, BRACKET MOUNTED TO POLE, EXTERIOR RATED CAMERA</p> <p>C-01 = COLOR MINI-DOME CEILING MOUNTED FLUSH, INTERIOR RATED</p> <p>C-02 = COLOR MINI-DOME CEILING MOUNTED FLUSH, EXTERIOR RATED</p> <p>C-03 = CEILING MOUNTED MULTISENSOR CAMERA (360 DEGREE VIEW)</p> | | | | |
| EMERGENCY RESPONDER COMMUNICATION ENHANCEMENT SYSTEM | D | D | C | C |
| <p>THE CONTRACTOR SHALL BE AWARE THAT CURRENT CODE REQUIREMENTS ARE MORE STRINGENT RELATIVE TO MUNICIPAL/EMERGENCY RESPONDER RADIO SYSTEM SIGNALS AND THEIR ABILITY TO REACH INTO NEW BUILDINGS. THE DETERMINATION OF NECESSITY FOR AN ERCS SYSTEM ON THIS PROJECT IS A COMBINATION OF A SITE SURVEY AND DISCUSSIONS WITH THE FIRE MARSHAL AND THE AHJ. THE CONTRACTOR SHALL PROVIDE A LINE-ITEM COST ALLOWANCE FOR THE SYSTEM TO BE TESTED FOR, DESIGNED IN ACCORDANCE WITH ALL LOCAL AND APPLICABLE CODES AND INSTALLED FOR THE NEW BUILDING.</p> | | | | |
| AUDIO VISUAL SYSTEMS | D | D | C | C |
| <p>ALL WORK SHALL BE PROVIDED UNDER THE CONTRACTOR'S SCOPE. SEE THE SPECIFICATIONS FOR EQUIPMENT AND THE DRAWINGS FOR ROUGH-IN REQUIREMENTS. THE CONTRACTOR SHALL PROVIDE ALL REQUIRED EQUIPMENT AND ACCESSORIES FOR COMPLETE AND OPERATIONAL SYSTEMS.</p> | | | | |
| WIRELESS LOCAL AREA NETWORK | D | D | C | OWN |
| <p>THE CONTRACTOR SHALL PROVIDE ALL WORK TO SUPPORT AN OWNER/CITY PROVIDED WI-FI SYSTEM. THIS INCLUDES, BUT NOT LIMITED TO, CONDUIT PATHWAY AND 120 VOLT POWER (AS SHOWN ON THE DRAWINGS). THE OWNER/CITY SHALL BE RESPONSIBLE FOR CAT6A WIRING TO EACH ACCESS POINT. THE OWNER SHALL PROVIDE THE ACCESS POINT HARDWARE AND PROGRAMMING. SEE DETAIL FOR MORE INFORMATIION.</p> | | | | |


11/25/2024 11:38:22 A:\Autodesk Docs\Grand Junction Community Recreation Center\2023057_GJCR_C_ELEC_R24.rvt



2
T101

SITE TECHNOLOGY PLAN - NORTH

SCALE: 1" = 50'-0"



LEGEND

- CAMERA (NOLA/ARCTIC)
- CAMERA (BUILDING CCTV)

GENERAL NOTES


(THIS SHEET ONLY)

- REFER TO T001E001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY AND ELECTRICAL DRAWINGS.
- THIS PLAN DOES NOT INDICATE ALL OF THE UNDERGROUND UTILITY LINES. NO LOCATION BY EXCAVATION WAS PERFORMED FOR THIS PROJECT. UTILITIES SHOWN ARE BASED ON DRAWINGS RECEIVED FROM THE SITE/CIVIL ENGINEER. REFER TO THE CIVIL DRAWINGS FOR ADDITIONAL INFORMATION. CONTRACTOR TO FIELD VERIFY EXACT LOCATIONS OF ALL UNDERGROUND UTILITY LINES (NEW AND EXISTING) OF ALL TRADES PRIOR TO ANY SITE WORK.
- THE CONTRACTOR SHALL PROVIDE ALL CONDUIT, TRENCHING AND BACKFILLING. REFER TO CIVIL DRAWINGS FOR DRY UTILITY EASEMENT LOCATIONS.
- BURIAL DEPTH FOR CONDUITS SHALL BE PER THE BICSI OSP MANUAL AND TIA 569.

KEY NOTES

- ARCTIC CAMERA MOUNTED TO LIGHT POLE (CONFIRM EXACT HEIGHT WITH THE CITY). CAMERA AND MOUNT PROVIDED BY THE CITY. INSTALLATION BY THE CONTRACTOR. PROVIDE 12"X12"X6" WEATHERPROOF BOX WITH 120 VOLT GFCI RECEPTACLE, MEDIA CONVERTER AND 4-STRAND OS2 SINGLEMODE FIBER OPTIC CABLING BACK TO NEAREST TELECOM ROOM SHALL BE BY THE OWNER/CITY. PROVIDE ALL ACCESSORIES FOR A COMPLETE SYSTEM.
- ARCTIC CAMERA MOUNTED TO BUILDING (CONFIRM EXACT LOCATION WITH THE CITY). CAT6A CABLE RUN TO THE NEAREST TELECOM ROOM BY THE OWNER/CITY. PROVIDE JUNCTION BOX AND CONDUIT STUBBED IN THE ACCESSIBLE CEILING SPACE OF THE BUILDING. LABEL ALL CONDUITS. CAMERA AND MOUNT PROVIDED BY THE CITY. INSTALLATION BY THE CONTRACTOR.
- PROVIDE 2" UNDERGROUND PVC CONDUIT TO CREATE PATHWAY FOR CAMERA CABLING BACK TO THE TELECOM ROOMS IN THE BUILDING.
- STUB CONDUIT PER TIA 569 INTO THE IDF SPACE. LABEL ALL CONDUIT.
- STUB CONDUIT IN THE ACCESSIBLE CEILING SPACE INSIDE THE BUILDING. PREPARE TO RUN CAMERA CABLING TO THE MDF ROOM. LABEL ALL CONDUIT.
- 12X18 QUARTZITE HANDHOLE. PROVIDE COVER MARKED 'COMMUNICATIONS'.
- PROVIDE A SYSTEM OF 24"X36" ANSI TIER 22 RATED QUARTZITE HANDHOLES CONNECTED BY (1) 2" PVC AND (1) 4" PVC CONDUIT FOR THE CITY'S FIBER OPTIC NETWORK. PROVIDE COVERS MARKED 'COMMUNICATIONS'. FIBER PROVIDED BY OWNER/CITY.
- PROVIDE A SYSTEM OF (2) 4" PVC CONDUITS AND THE INDICATED 24"X36" ANSI TIER 22 RATED QUARTZITE HANDHOLES FOR FUTURE SERVICES. PROVIDE COVERS MARKED 'COMMUNICATIONS'.
- NOT USED.
- STUB CONDUIT PER TIA-569 INTO THE MDF SPACE. LABEL ALL CONDUIT.
- SEE FLOOR PLANS FOR ACCESS CONTROLS TO PROVIDE AT THE EXTERIOR GATE.
- CONTINUED ON T102.
- PROVIDE A 30"X48" ANSI TIER 22 RATED QUARTZITE HANDHOLE WITH (1) 2" PVC (CITY FIBER), (1) 4" PVC CONDUIT (CITY SPARE) AND (6) 4" PVC CONDUITS (FUTURE SERVICES) INTO THE MDF SPACE. LABEL ALL CONDUIT. PROVIDE COVER MARKED 'COMMUNICATIONS'. FIBER PROVIDED BY OWNER/CITY.

11/25/2024 11:38:50 A\\Autodesk Docs\\Grand Junction Community Recreation Center\\2023057_GJCRC_ELEC_R24.rvt

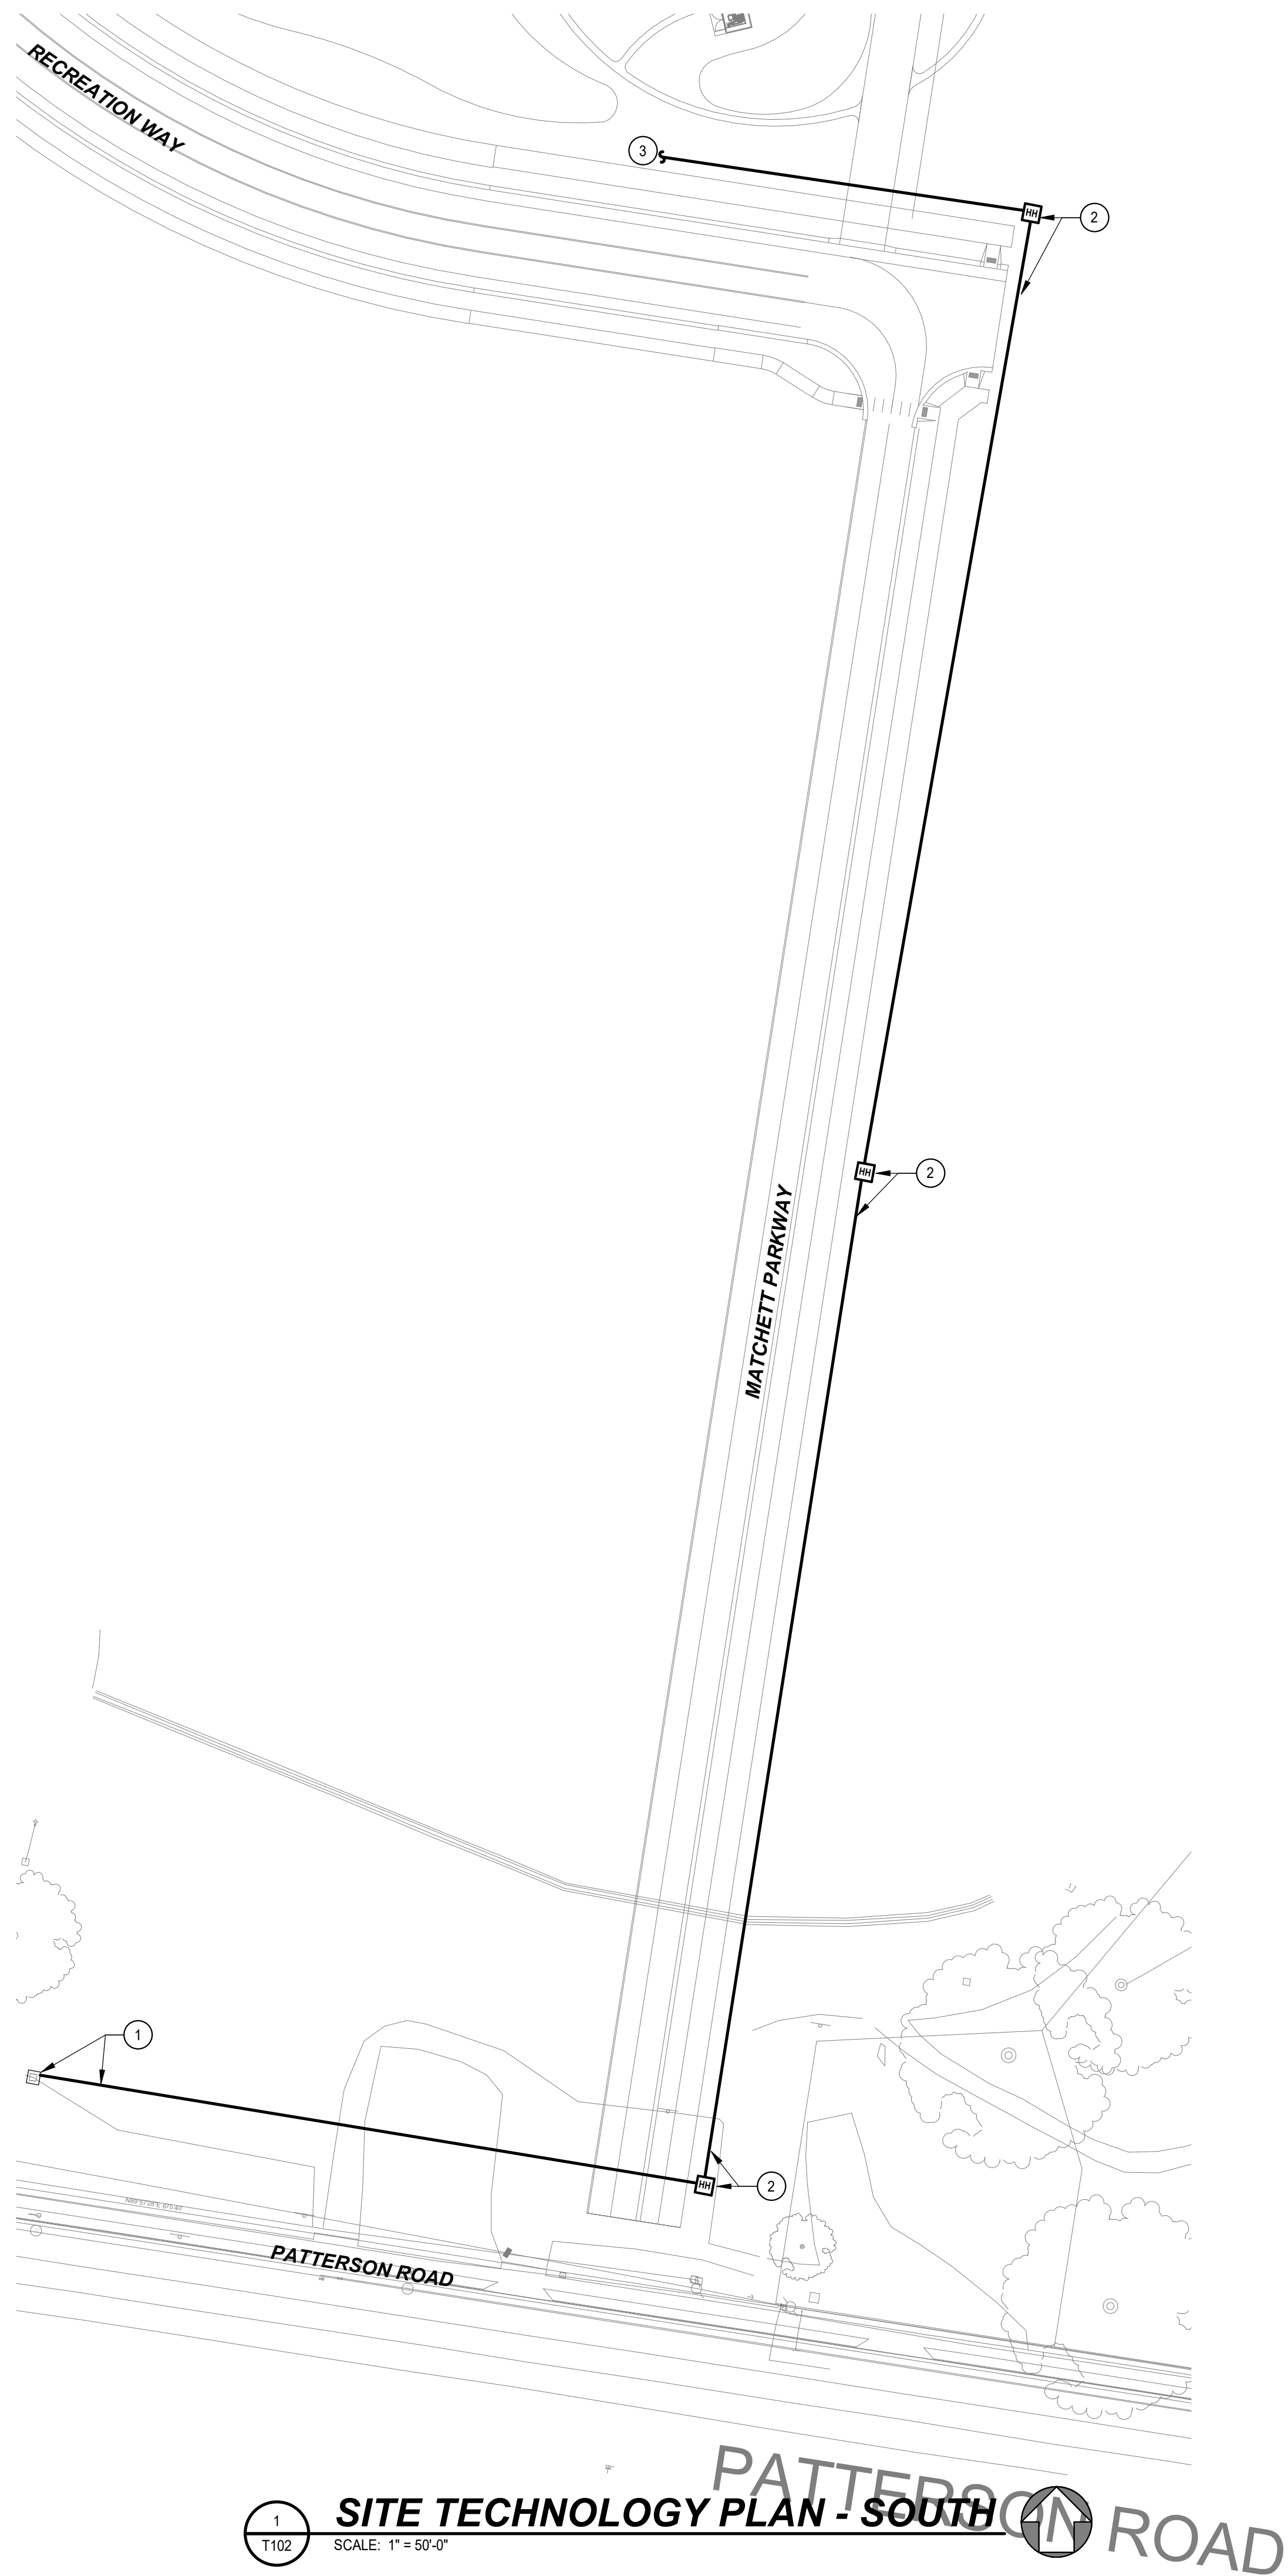

1
T102

SITE TECHNOLOGY PLAN - SOUTH

SCALE: 1" = 50'-0"



GENERAL NOTES

(THIS SHEET ONLY)

- A. REFER TO T001E001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY AND ELECTRICAL DRAWINGS.
- B. THIS PLAN DOES NOT INDICATE ALL OF THE UNDERGROUND UTILITY LINES. NO LOCATION BY EXCAVATION WAS PERFORMED FOR THIS PROJECT. UTILITIES SHOWN ARE BASED ON DRAWINGS RECEIVED FROM THE SITE/CIVIL ENGINEER. REFER TO THE CIVIL DRAWINGS FOR ADDITIONAL INFORMATION. CONTRACTOR TO FIELD VERIFY EXACT LOCATIONS OF ALL UNDERGROUND UTILITY LINES (NEW AND EXISTING) OF ALL TRADES PRIOR TO ANY SITE WORK.
- C. THE CONTRACTOR SHALL PROVIDE ALL CONDUIT, TRENCHING AND BACKFILLING. REFER TO CIVIL DRAWINGS FOR DRY UTILITY EASEMENT LOCATIONS.
- D. BURIAL DEPTH FOR CONDUITS SHALL BE PER THE BICSI OSP MANUAL AND TIA 569.

KEY NOTES

- ① EXISTING VAULT WHERE CITY WILL INTERCEPT FIBER OPTIC CABLING. PROVIDE (1) 2" CONDUIT INTO THE EXISTING VAULT. COORDINATE WITH THE OWNER/CITY. FIBER PROVIDED BY OWNER/CITY.
- ② PROVIDE A SYSTEM OF 24"x36" ANSI TIER 22 RATED QUARTZITE HANDHOLES CONNECTED BY (1) 2" PVC AND (1) 4" PVC CONDUIT FOR THE CITY'S FIBER OPTIC NETWORK. PROVIDE COVERS MARKED 'COMMUNICATIONS'. FIBER PROVIDED BY OWNER/CITY.
- ③ CONTINUED ON T101.



**BARKER
RINKER
SEACAT**
ARCHITECTURE

brsarch.com



ENGINEERING TECHNOLOGY LIGHTING
reesehackman.com

GRAND JUNCTION COMMUNITY
RECREATION CENTER

GRAND JUNCTION, CO



Project Number: 2023.042
Issue: CONFORMANCE SET
Date: 11/26/2024
Drawn By: R.H.
Checked By: R.H.

| Rev. | Description | Date: |
|------|-------------|------------|
| 1 | ADDENDUM #1 | 2024.08.15 |


Sheet title:
SITE TECHNOLOGY PLAN - SOUTH

T102




© 2017 Barker Rinker Seacat Architecture

1/6/2025 11:59:56 AM Autodesk Docs://Grand Junction Community Recreation Center/2023057_GJCRC_ELEC_R24.rvt

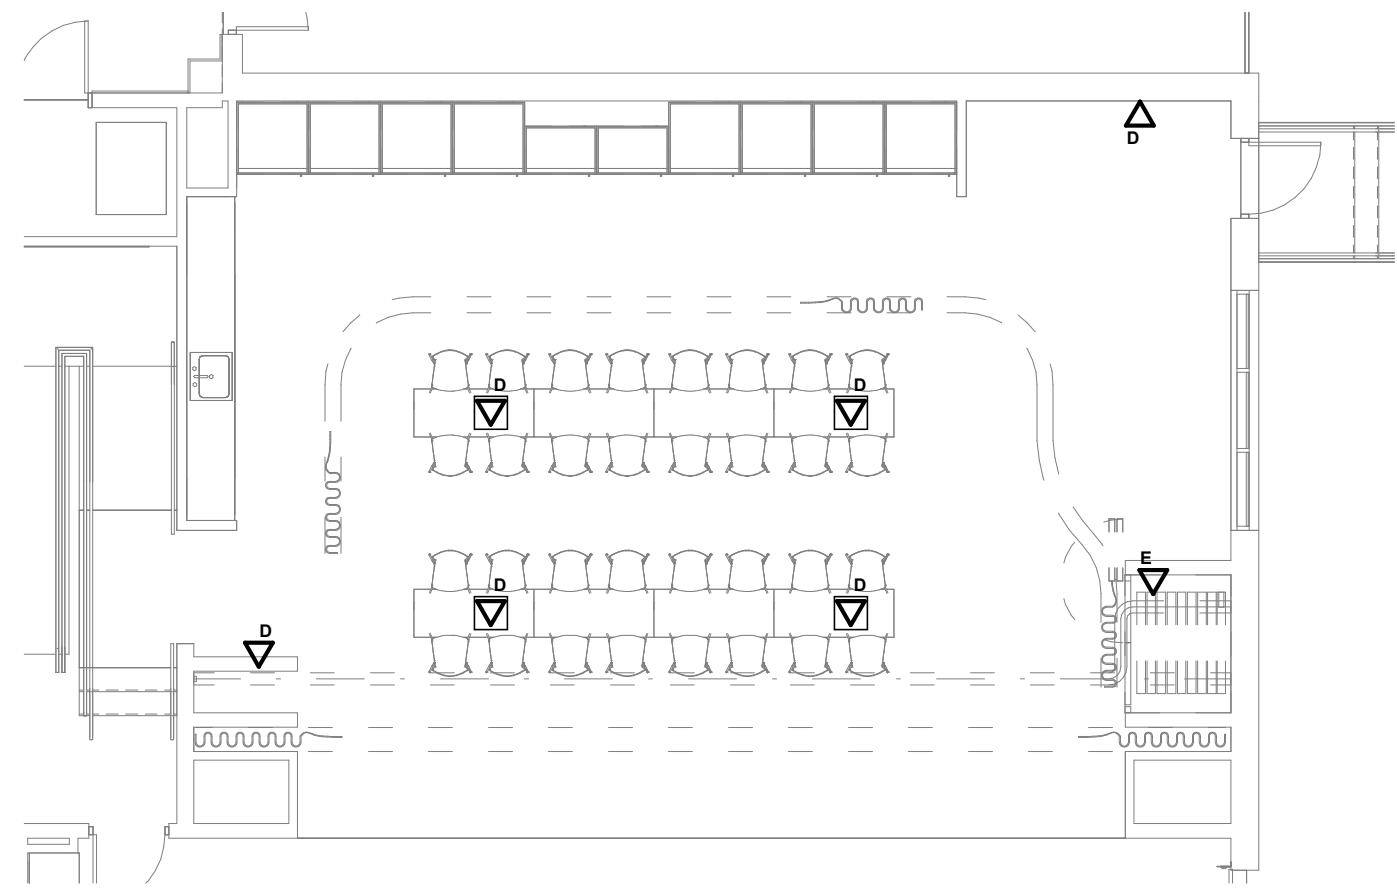


**CLASSROOM/PLATFORM
TECHNOLOGY PLAN
(ALTERNATE #14)**

3
T311
SCALE: 1/8" = 1'-0"

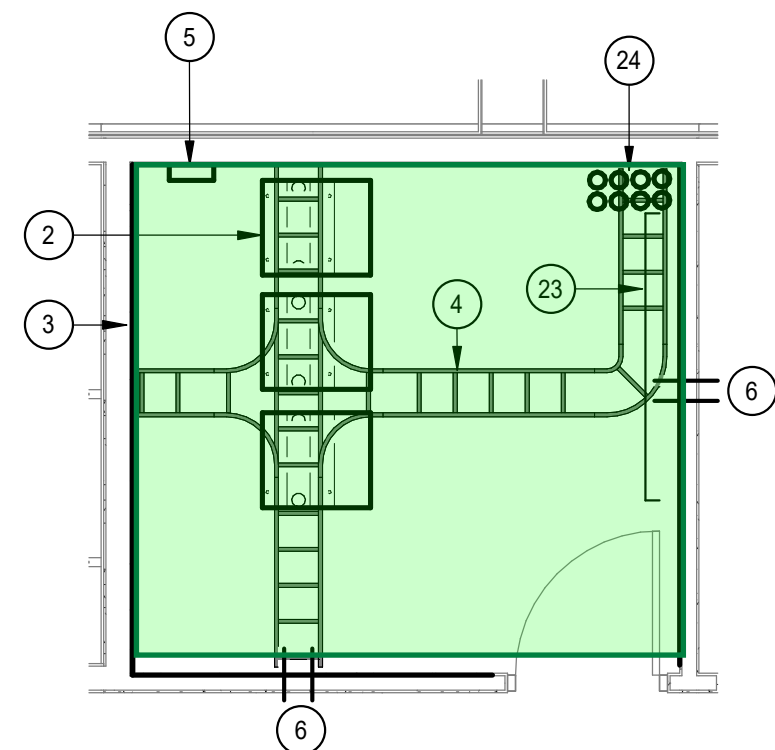

ENLARGED TECH PLAN - MDF 1112


2
T311
SCALE: 1/4" = 1'-0"

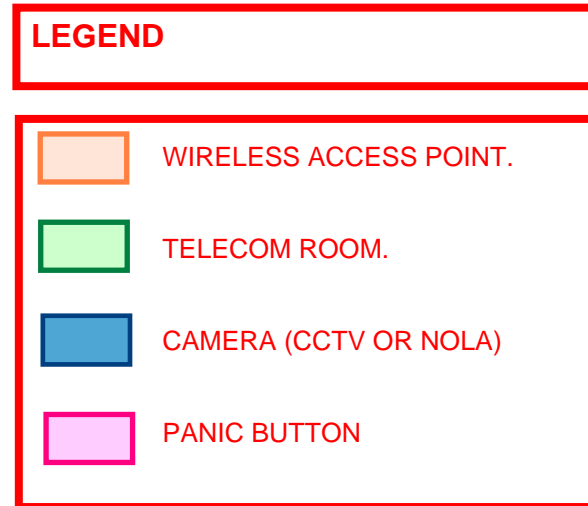

- KEY NOTES** (THIS SHEET ONLY)
- PROVIDE MILLION STYLE READER. COORDINATE WITH DOOR HARDWARE SUPPLIER AND DIVISION 08 SPECIFICATIONS.
 - MASTER CONTROL SURFACE FOR THE FACILITY-WIDE PAGING AND BACKGROUND MUSIC (BGM) SYSTEM. LABEL ACCORDINGLY.
 - SOURCE AND VOLUME CONTROL STATION FOR THE FACILITY-WIDE PAGING AND BACKGROUND MUSIC (BGM) SYSTEM ZONES 2, 4, 17, 18. LABEL ACCORDINGLY.
 - RESCUE ASSISTANCE MAIN CONTROL PANEL. SEE DIAGRAMS.
 - PROVIDE DATA OUTLET AT CEILING FOR CONNECTION TO PEOPLE COUNTER. COORDINATE LOCATION WITH OWNER/CITY.
 - CEILING MOUNTED PROJECTOR AND LIFT. SEE SPECIFICATIONS.
 - CEILING MOUNTED, RECESSED PROJECTION SCREEN. SEE SPECIFICATIONS.
 - SPACE ON WALL FOR UTILITY COMPANY DEMARCATION.
 - INCOMING CONDUITS FROM SITE. REFER TO THE SITE PLAN FOR EXACT QUANTITY AND TYPE. STUB PER ITA 568. COORDINATE WITH OWNER/CITY'S VENDOR FOR EXACT LOCATION.
 - PROVIDE BLUETOOTH RECEIVER FOR THE FACILITY-WIDE PAGING SYSTEM. SEE SPECIFICATIONS.
 - LOCATION OF CEILING MOUNTED ELECTRIC PROJECTION SCREEN AND PROJECTOR. THE PROJECTOR SHALL BE MOUNTED BELOW THE CEILING, BUT AS HIGH AS POSSIBLE. THE PROJECTOR SHALL LOWER FROM AN ELECTRIC TELESCOPING MOUNT TO ITS PROPER PROJECTING HEIGHT WHEN IN USE.



- KEY NOTES** (THIS SHEET ONLY)
- EMERGENCY CALL FOR HELP BUTTON. SEE DIAGRAM.
 - PROVIDE A CLEAR, FLIP-UP, LOCKABLE COVER OVER BLUETOOTH PAIRING BUTTON.
 - 3/4" PLYWOOD BACKBOARD FROM FLOOR TO 8'-0" AFF FOR THE EXTENT OF THE LINE. PAINT TO MATCH ADJACENT SURFACES.
 - CABLE TRAY MOUNTED DIRECTLY ABOVE THE RACKS. SEE DIAGRAMS.
 - TELECOM GROUNDING BUS BAR.
 - PROVIDE (2) 4" CONDUITS THROUGH WALL. STI #2ZPATH.
 - PROVIDE (2) FULL HEIGHT AV RACKS IN THIS SPACE.
 - PROVIDE DOOR CONTACT APPROPRIATE FOR OVERHEAD DOOR AND CONNECT TO THE ACCESS CONTROL SYSTEM. SCHLAGE #674-0H.OAE. PROVIDE CARD READER TO OPERATE OVERHEAD DOOR SUCH THAT A VALID READ OPENS/CLOSES DOOR.
 - SEE DETAIL ON T800 SERIES DRAWINGS FOR MORE INFORMATION ON WALL MOUNTED MONITORS/DIGITAL SIGNAGE BOARDS. PROVIDE THIS LOCATION WITHOUT THE LOW BOXES.
 - SEE DETAIL ON T800 SERIES DRAWINGS FOR MORE INFORMATION ON WALL MOUNTED MONITORS/DIGITAL SIGNAGE BOARDS.
 - EXTERIOR MAINTENANCE GATE (SEE SITE PLAN FOR EXACT LOCATION). PROVIDE READER TO DISARM LOCAL SOUNDER SUCH THAT A VALID CARD READ WILL NOT ALARM DOOR. PROVIDE THE REQUIRED UNDERGROUND CONDUIT INFRASTRUCTURE TO THE IDF ROOM FOR SIGNAL CABLEING.
 - PROVIDE SPEAKERS AND WI-FI ACCESS POINT UNDER THE BASE BID.
 - COORDINATE THE INSTALLATION OF SPEAKERS IN SLOPED CEILING PANELS WITH ARCHITECT PRIOR TO ROUGH-IN. SPEAKER SHALL BE PAINTED A CUSTOM COLOR TO MATCH CEILING SURFACE.
 - IN THIS SPACE, MOUNT DEVICES IN CASEWORK BELOW. COORDINATE WITH CASEWORK SUPPLIER.
 - EXTERIOR VESTIBULE DOORS (TYPICAL FOR DOORS 1000A, 1000B, 1000C) SHALL LOCK AND UNLOCK ON A SCHEDULE THROUGH THE ACCESS CONTROL SYSTEM. COORDINATE WITH DIVISION 08 HARDWARE SPECIFICATION. ONLY DOOR 1000C SHALL UNLOCK WITH A VALID CREDENTIAL READ. DOORS 1000B AND 1000C SHALL BE MONITORED FOR THEIR OPEN/CLOSED STATUS THROUGH THE SYSTEM.

- GENERAL NOTES** (THIS SHEET ONLY)
- REFER TO T001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY DRAWINGS.
 - FOR ALL TELECOMMUNICATIONS DEVICES, PROVIDE A 1-GANG FACEPLATE IN COLOR PER THE ARCHITECT.
 - FOR ALL TELECOMMUNICATIONS DEVICES, LOCATE THE DEVICE NEXT TO THE NEAREST ELECTRICAL RECEPTACLE AND MATCH THE MOUNTING HEIGHT (SEE THE ELECTRICAL DRAWINGS).
 - ALL NEW TELECOM WIRING SHOWN ON THIS PLANS SHALL BE HOMERUN TO MDF 1112.

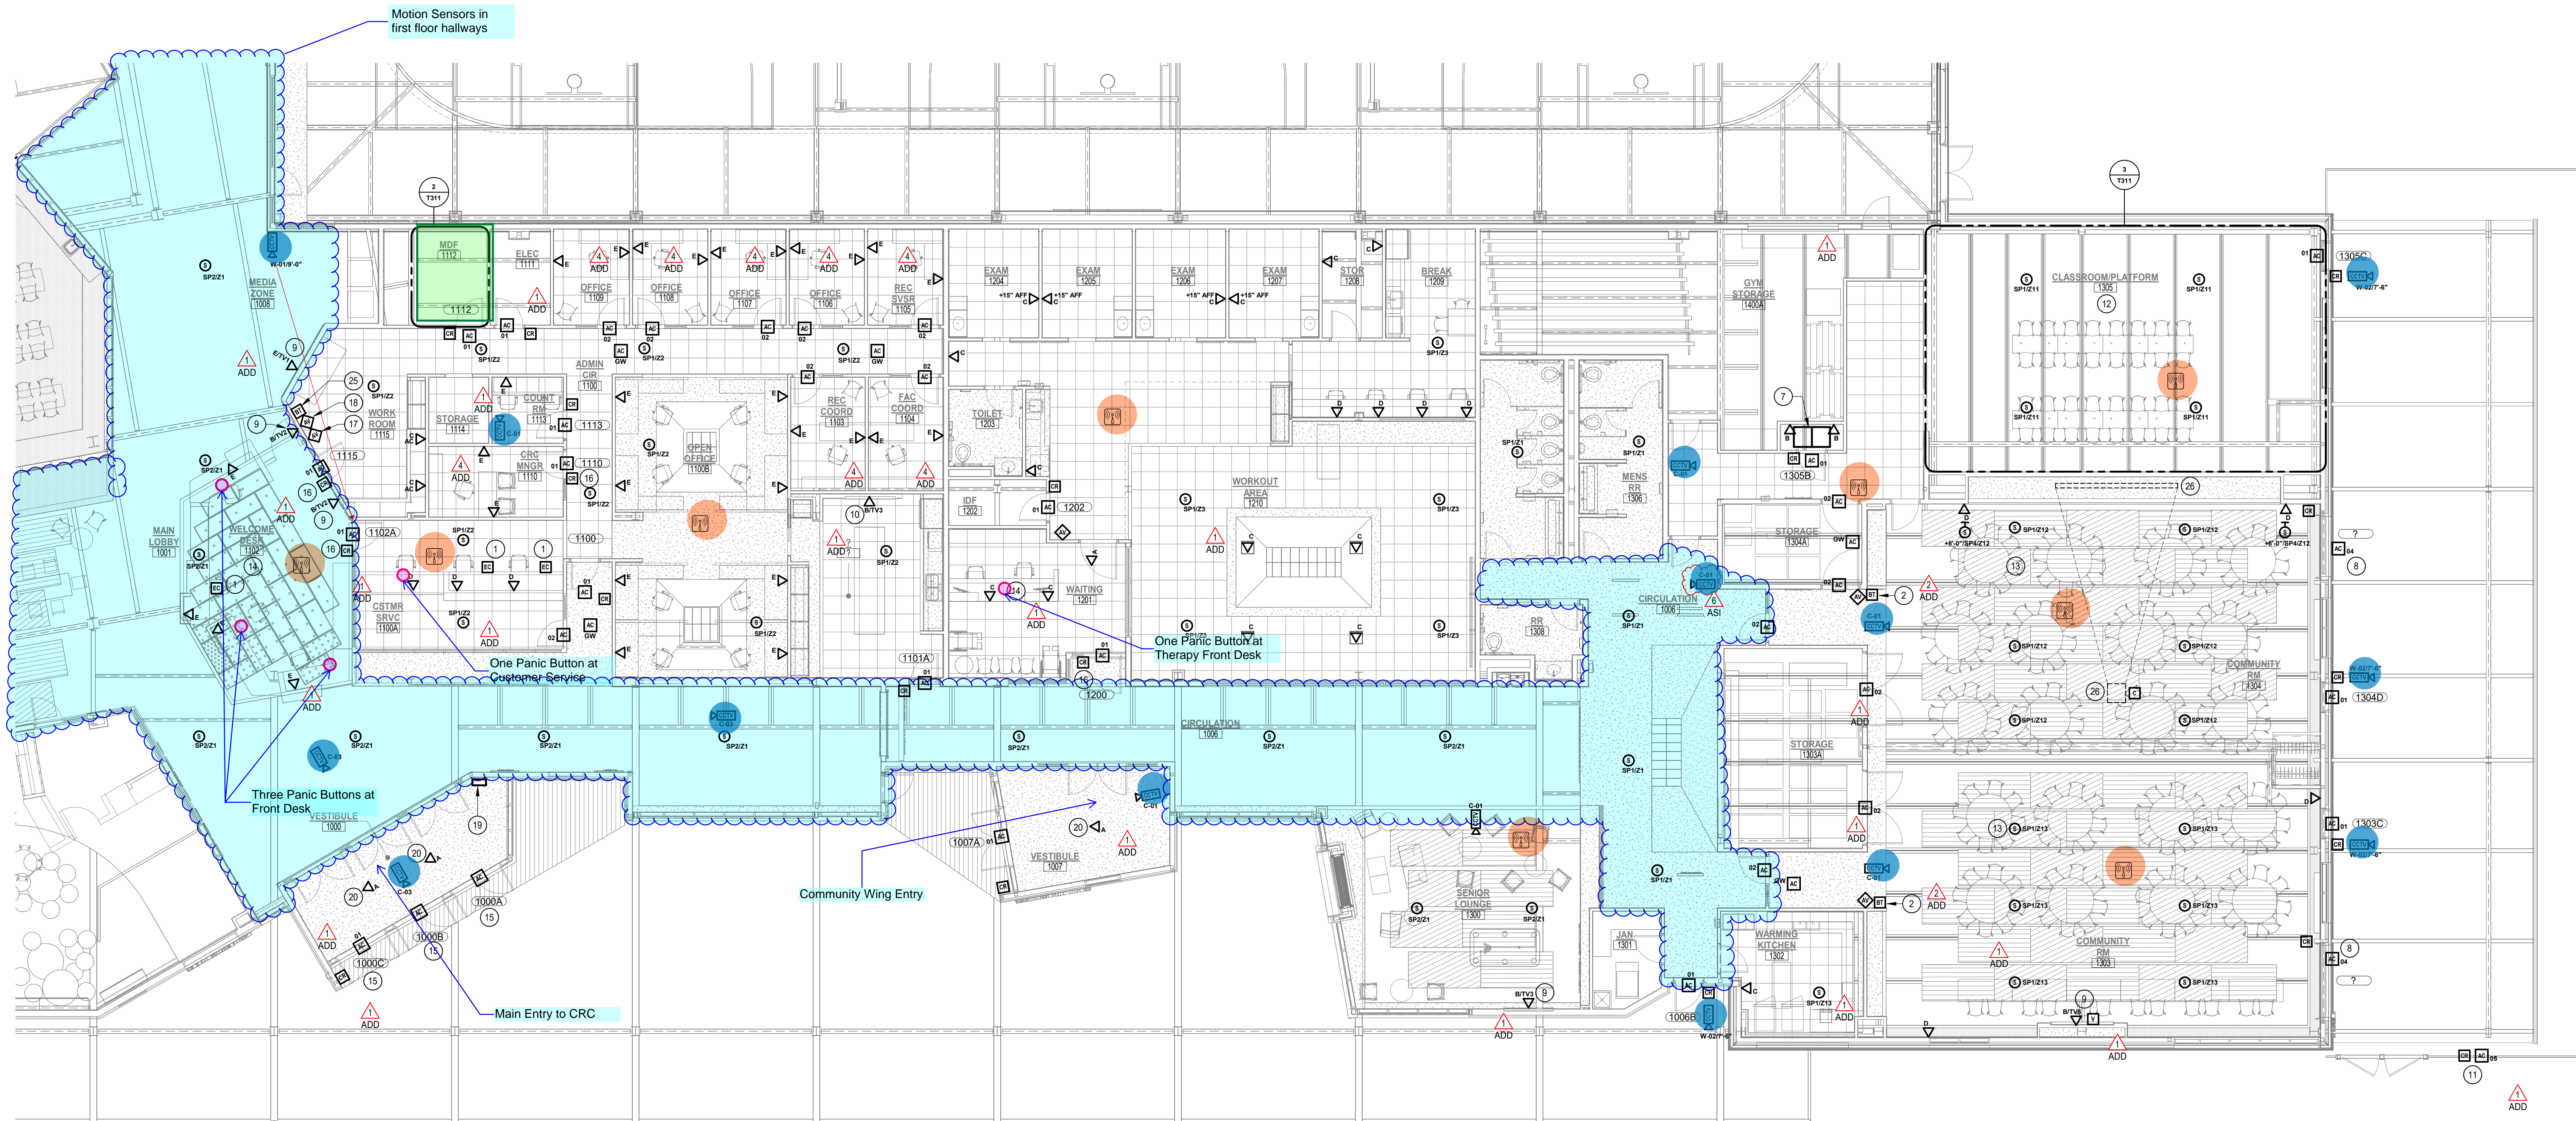


FIRST FLOOR TECHNOLOGY PLAN - AREA 'A'

1
T311
SCALE: 1/8" = 1'-0"

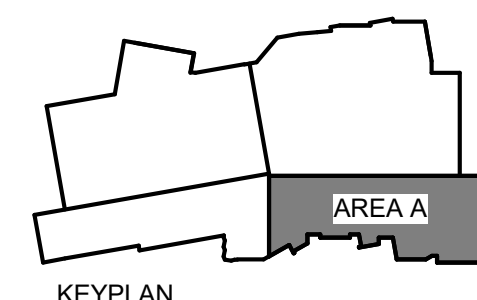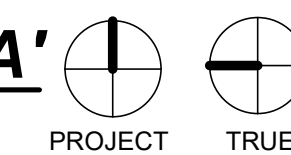

| | | |
|-----------------|-----------------|------------|
| Project Number: | 2023.042 | |
| Issue: | CONFORMANCE SET | |
| Date: | 11/26/2024 | |
| Drawn By: | R.H. | |
| Checked By: | R.H. | |
| Revisions: | | |
| Rev. | Description | Date |
| 1 | ADDENDUM #1 | 2024.08.15 |
| 2 | ADDENDUM #2 | 2024.08.29 |
| 4 | ADDENDUM #4 | 2024.11.26 |
| 6 | ASI-002 | 2025.01.06 |

1/28/2025 2:28:49 PM Autodesk Docs://Grand Junction Community Recreation Center/2023057_GJCRC_ELEC_R24.rvt

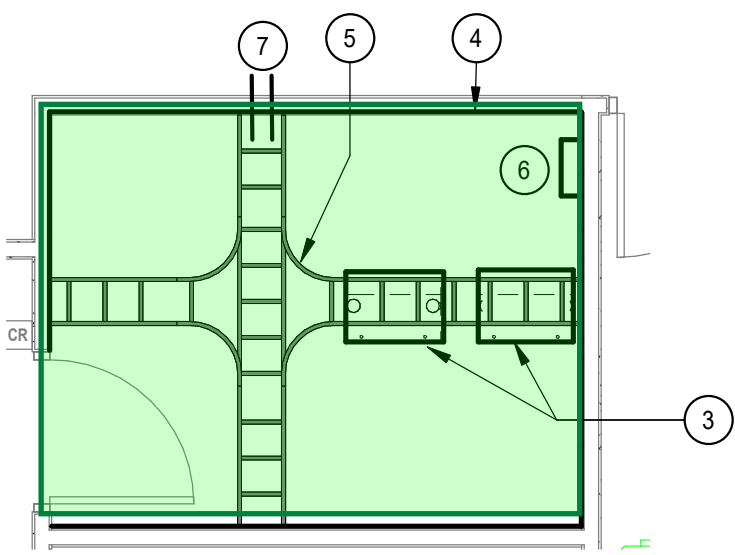

LEGEND

- WIRELESS ACCESS POINT.
- TELECOM ROOM.
- CAMERA (CCTV OR NOLA)
- PANIC BUTTON


KEY NOTES

- EXIT ONLY DOOR. NO ACCESS CONTROLS.
- PROVIDE A PUSH BUTTON RELEASE FOR THE DOOR INTO CHILD WATCH BELOW THE DESK.
- NEW TELECOM RACK (TYP. FOR 2) PROVIDED BY OWNER/CITY. ^{ADD}
- 3/4" PLYWOOD BACKBOARD FROM FLOOR TO 6'-0" AFF FOR THE EXTENT OF THE LINE. PAINT TO MATCH ADJACENT SURFACES.
- CABLE TRAY MOUNTED DIRECTLY ABOVE THE RACKS. SEE DIAGRAMS.
- TELECOM GROUNDING BUS BAR.
- PROVIDE (4) 4" CONDUITS THROUGH WALL. ST1 #EZPATH.
- SEE DETAIL ON T800 SERIES DRAWINGS FOR MORE INFORMATION ON WALL MOUNTED MONITORS/DIGITAL SIGNAGE BOARDS.
- EXTERIOR MAINTENANCE GATE (SEE SITE PLAN FOR EXACT LOCATION). PROVIDE READER TO DISARM LOCAL SOUNDER SUCH THAT A VALID CARD READ WILL NOT ALARM DOOR. PROVIDE THE REQUIRED UNDERGROUND CONDUIT INFRASTRUCTURE TO THE IDF ROOM FOR SIGNAL CABLING.
- SPEAKER MOUNTED TO STRUCTURE ABOVE.
- PROVIDE DOOR CONTACT APPROPRIATE FOR OVERHEAD DOOR AND CONNECT TO THE ACCESS CONTROL SYSTEM. SCHLAGE #544-0H.0AE.
- DOOR HARDWARE TO SECURE DOOR FROM PARTY ROOM SIDE TO PREVENT ENTRY INTO THE NATATORIUM.
- SOURCE AND VOLUME CONTROL STATION FOR THE FACILITY-WIDE PAGING AND BACKGROUND MUSIC (BGM) SYSTEM ZONE 5 & LABEL ACCORDINGLY.
- NATATORIUM AV RACK. PROVIDE LEGRAND #PACS25 BOX TO ACCEPT AUDIO /VIDEO CABLES/CONDUIT FROM VIDEO BOARD AND SPEAKERS IN NATATORIUM. COORDINATE EXACT REQUIREMENTS WITH VIDEO BOARD SUPPLIER.
- PROVIDE A CLEAR, FLIP-UP, LOCKABLE COVER OVER BLUETOOTH PAIRING BUTTON. ^{ADD}

GENERAL NOTES

(THIS SHEET ONLY)


- REFER TO T001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY DRAWINGS.
- FOR ALL TELECOMMUNICATIONS DEVICES, PROVIDE A 1-GANG FACEPLATE IN COLOR PER THE ARCHITECT.
- FOR ALL TELECOMMUNICATIONS DEVICES, LOCATE THE DEVICE NEXT TO THE NEAREST ELECTRICAL RECEPTACLE AND MATCH THE MOUNTING HEIGHT (SEE THE ELECTRICAL DRAWINGS).
- ALL NEW TELECOM WIRING SHOWN ON THIS PLAN SHALL BE HOMERUN TO IDF 1705.

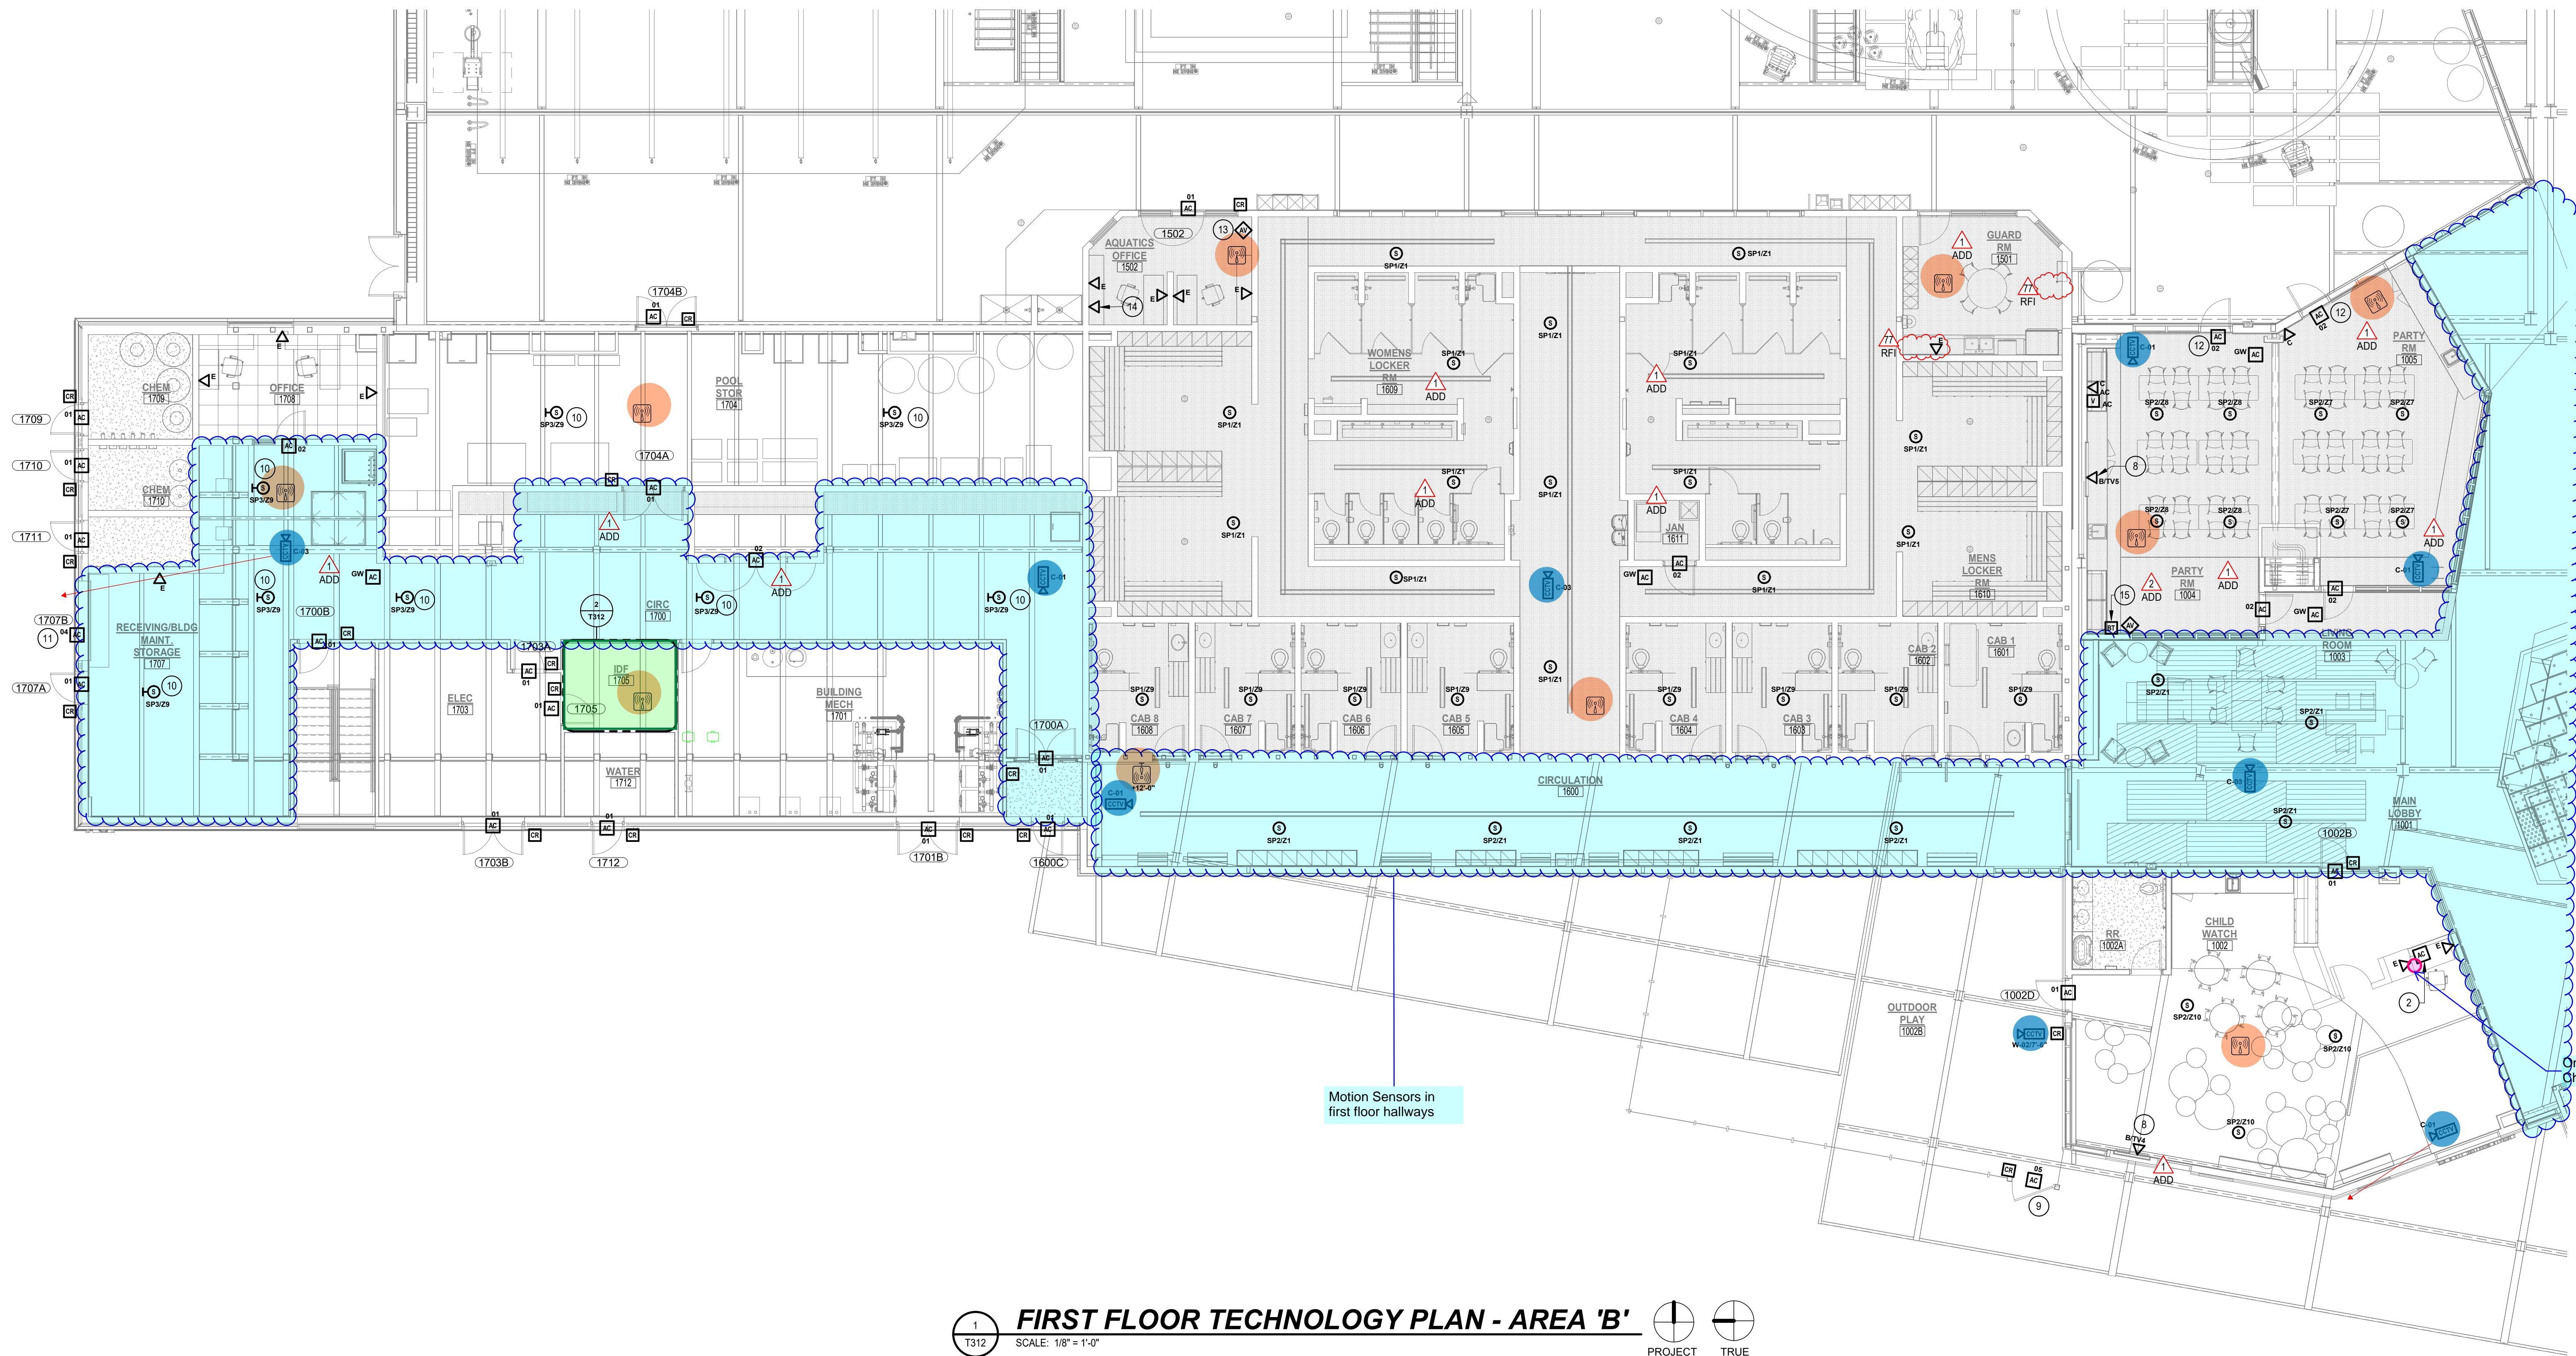



1
T312

FIRST FLOOR TECHNOLOGY PLAN - AREA 'B'

SCALE: 1/8" = 1'-0"

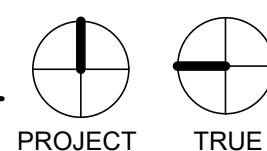


PROJECT TRUE

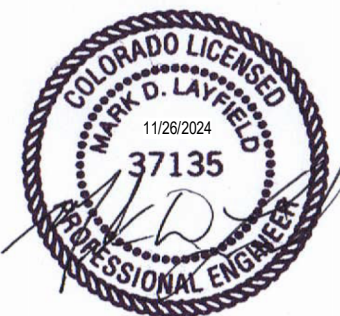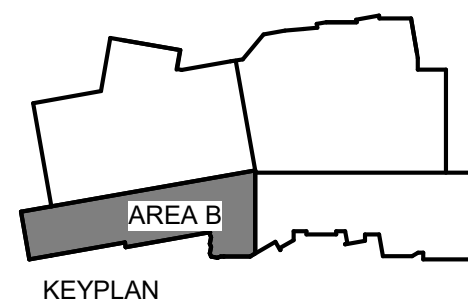

| | |
|-----------------|-----------------|
| Project Number: | 2023.042 |
| Issue: | CONFORMANCE SET |
| Date: | 11/28/2024 |
| Drawn By: | R.H. |
| Checked By: | R.H. |
| Revisions: | |
| Rev. | Description |
| 1 | ADDENDUM #1 |
| 2 | ADDENDUM #2 |
| 7 | RFI-77 |

11/25/2024 11:40:12 A:\Autodesk Docs\Grand Junction Community Recreation Center\2023057_GJCRC_ELEC_R24.rvt

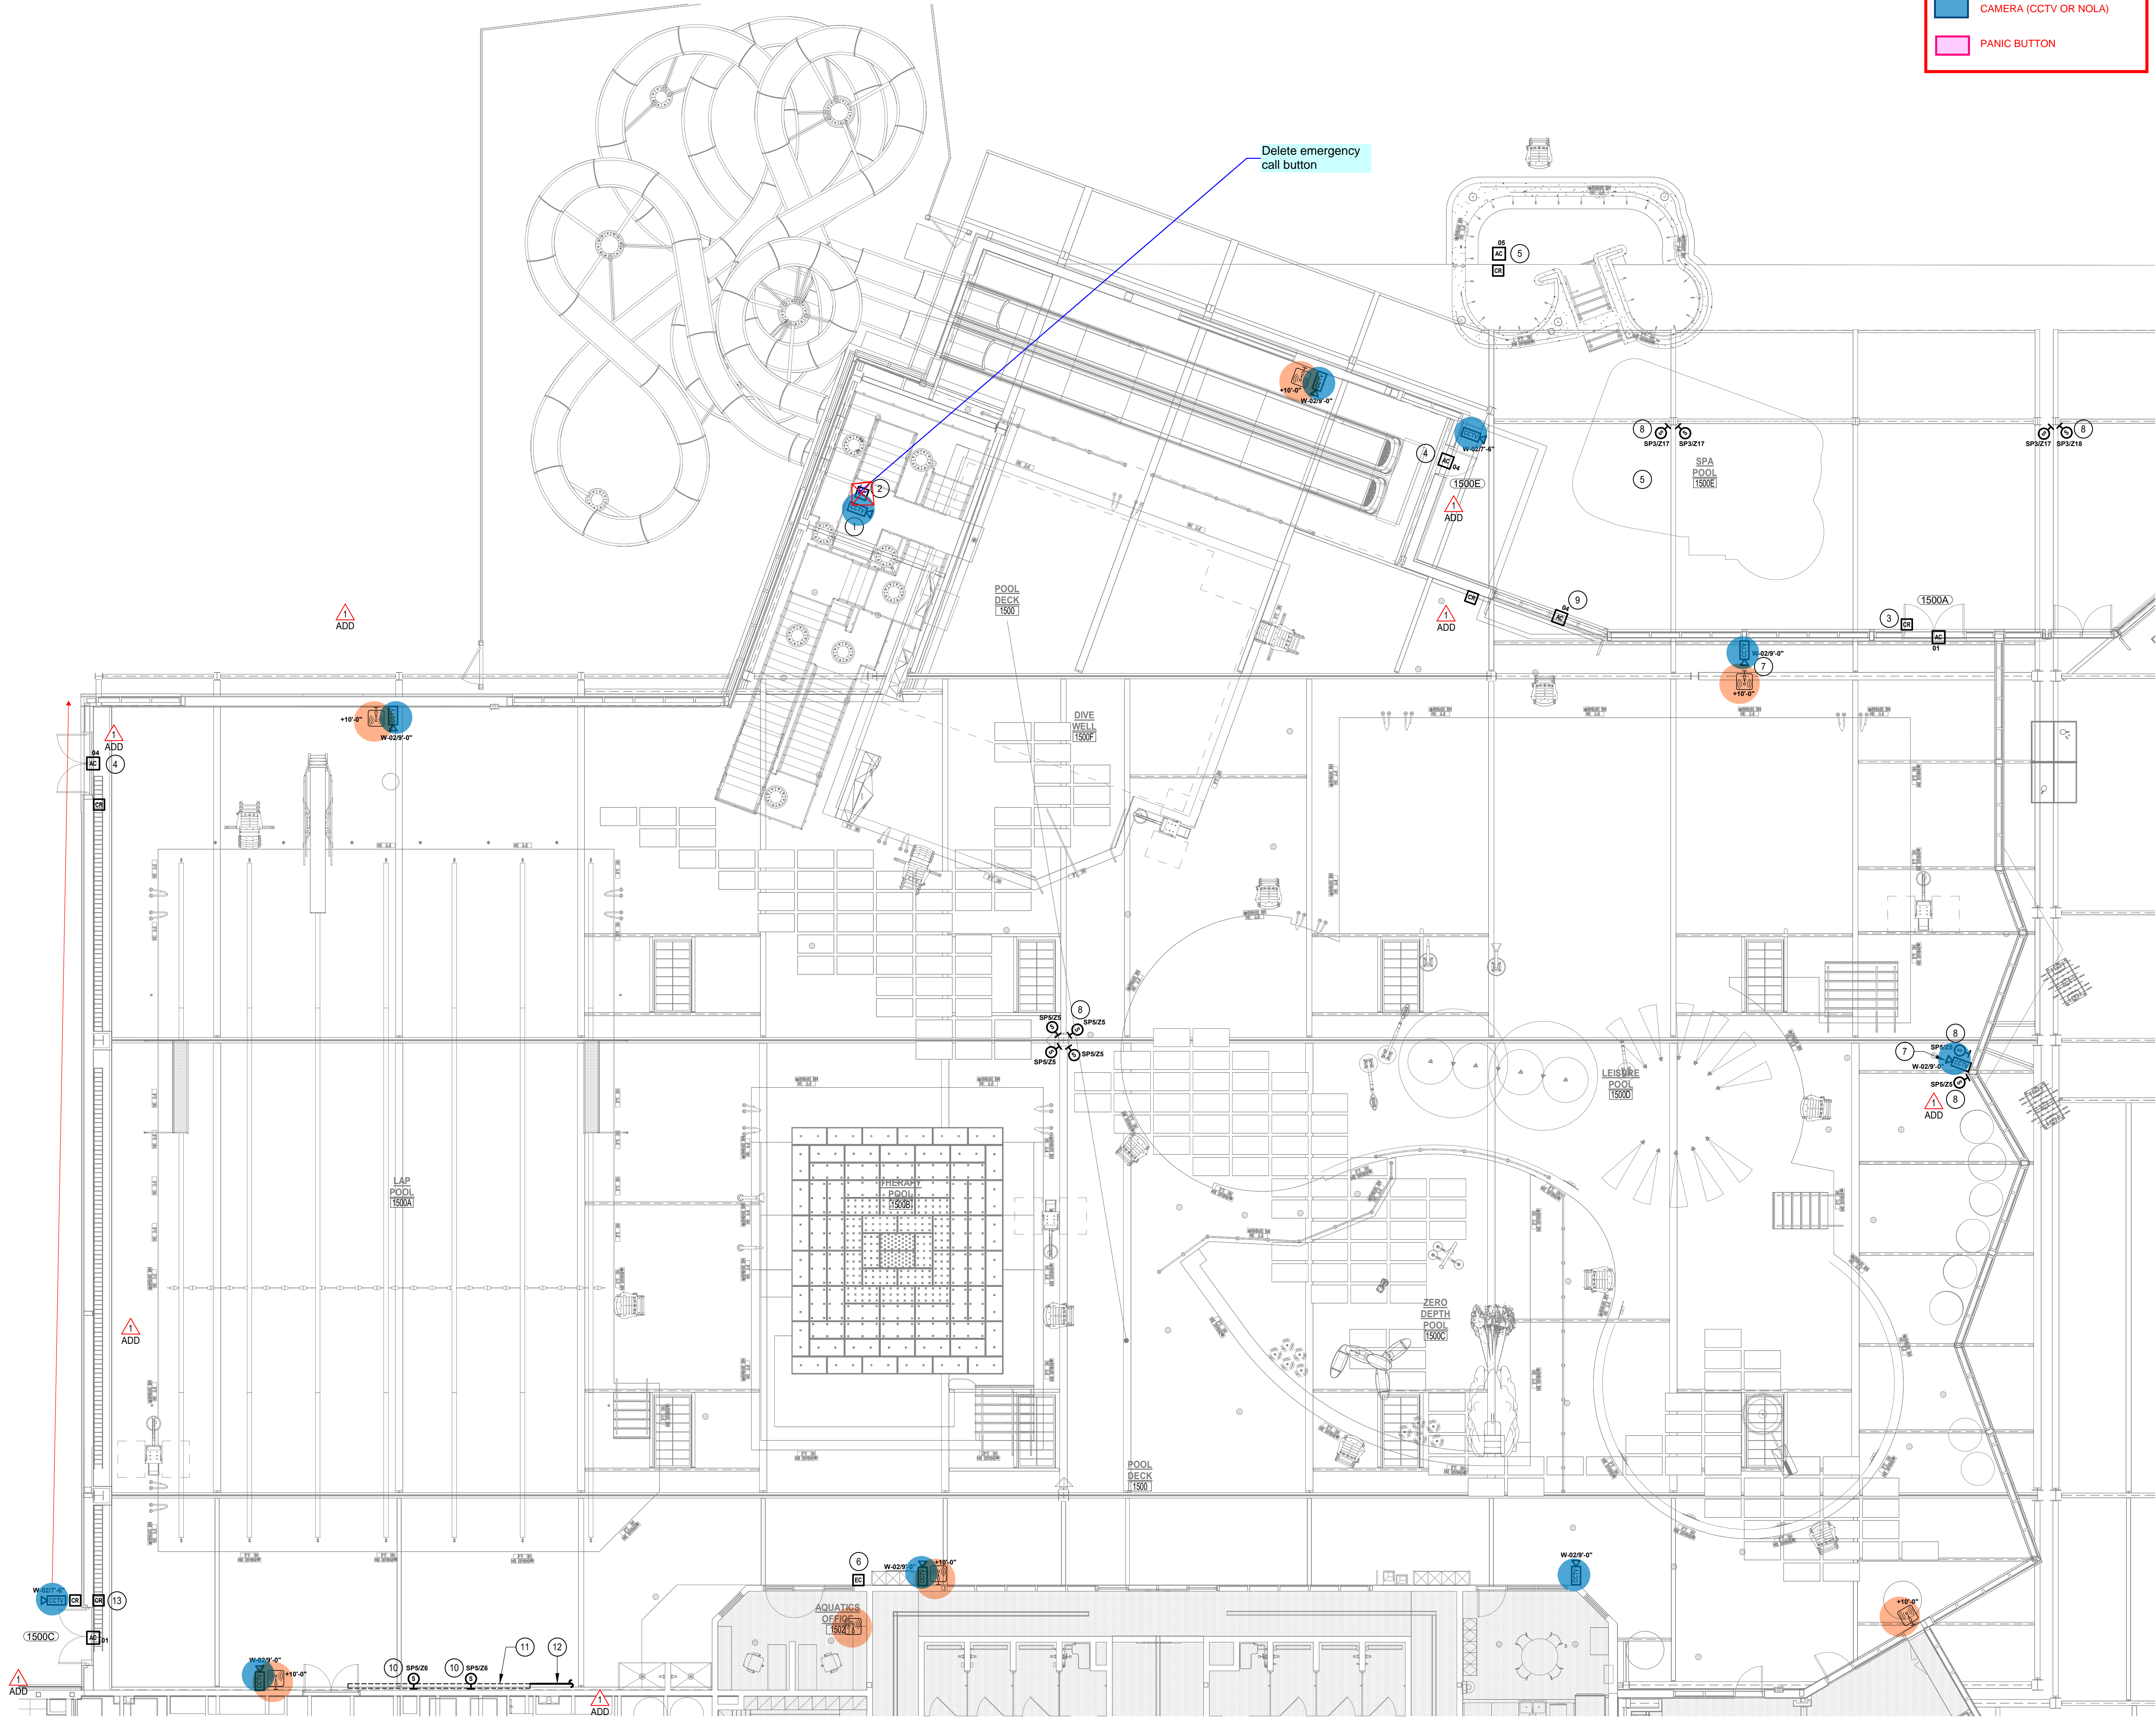


FIRST FLOOR TECHNOLOGY PLAN - AREA 'C'
SCALE: 1/8" = 1'-0"
PROJECT TRUE

LEGEND

- WIRELESS ACCESS POINT.
- TELECOM ROOM.
- CAMERA (CCTV OR NOLA)
- PANIC BUTTON

- GENERAL NOTES** (THIS SHEET ONLY)
- A. REFER TO T001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY DRAWINGS.
 - B. FOR ALL TELECOMMUNICATIONS DEVICES, PROVIDE A 1-GANG FACEPLATE IN COLOR PER THE ARCHITECT.
 - C. FOR ALL TELECOMMUNICATIONS DEVICES, LOCATE THE DEVICE NEXT TO THE NEAREST ELECTRICAL RECEPTACLE AND MATCH THE MOUNTING HEIGHT (SEE THE ELECTRICAL DRAWINGS).
 - D. ALL NEW TELECOM WIRING SHOWN ON THIS PLAN SHALL BE HOMERUN TO IDF 1705

- KEY NOTES**
- 1. COORDINATE EXACT MOUNTING OF CAMERA AT THE TOP OF THE SLIDE PLATFORM STRUCTURE WITH THE ARCHITECT.
 - 2. COORDINATE EXACT MOUNTING OF EMERGENCY CALL FOR HELP BUTTON AT THE TOP OF THE SLIDE PLATFORM STRUCTURE WITH THE ARCHITECT.
 - 3. PROVIDE MULLION STYLE READER. COORDINATE WITH DOOR HARDWARE SUPPLIER AND DIVISION 08 SPECIFICATIONS.
 - 4. EMERGENCY EXIT ONLY DOOR. PROVIDE CARD READER TO DISARM LOCAL SOUNDER. LOCAL SOUNDER INITIATED BY DOOR CONTACT WHEN DOOR IS OPENED. ALL DOOR HARDWARE BY DIVISION 08.
 - 5. EXTERIOR MAINTENANCE GATE (SEE SITE PLAN FOR EXACT LOCATION). PROVIDE READER TO DISARM LOCAL SOUNDER SUCH THAT A VALID CARD READ WILL NOT ALARM DOOR. PROVIDE THE REQUIRED UNDERGROUND CONDUIT INFRASTRUCTURE TO THE IDF ROOM FOR SIGNAL CABLEING.
 - 6. EMERGENCY CALL FOR HELP BUTTON. SEE DIAGRAM.
 - 7. MOUNT DEVICES TO STEEL COLUMN. COORDINATE WITH ARCHITECT.
 - 8. MOUNT SPEAKERS TO STEEL COLUMN. CONFIRM MOUNTING HEIGHT WITH AV CONTRACTOR. PROVIDE CONDUIT TO RUN SPEAKER WIRING UNDERGROUND TO THE AV RACK.
 - 9. PROVIDE DOOR CONTACT APPROPRIATE FOR OVERHEAD DOOR AND CONNECT TO THE ACCESS CONTROL SYSTEM. SCHLAGE #674-0H OAE. PROVIDE CARD READER TO OPERATE OVERHEAD DOOR SUCH THAT A VALID READ OPENS/CLOSES DOOR.
 - 10. ALTERNATE #34: PROVIDE SPEAKERS MOUNTED ABOVE THE VIDEO BOARD. COORDINATE ELEVATION WITH VIDEO BOARD SUPPLIER. BASE BID. PROVIDE CONDUIT BACK TO AQUATICS OFFICE AV BOX (SEE SPECIFICATIONS).
 - 11. ALTERNATE 34: PROVIDE VIDEO BOARD (SEE SPECIFICATIONS AND DETAILS).
 - 12. BASE BID. PROVIDE (1) 2" CONDUIT FROM THE AUDIO-VIDEO INPUT LOCATION OF THE VIDEO BOARD TO THE AV BOX IN AQUATIC OFFICE. COORDINATE TERMINATION AT VIDEO BOARD WITH SUPPLIER.
 - 13. INTERIOR READER ON THIS DOOR SHALL DISARM LOCAL SOUNDER. LOCAL SOUNDER INITIATED BY DOOR CONTACT WHEN DOOR IS OPENED. ALL DOOR HARDWARE BY DIVISION 08.

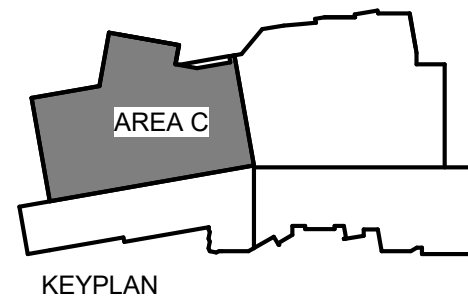

| | | |
|-----------------|-----------------|------------|
| Project Number: | 2023.042 | |
| Issue: | CONFORMANCE SET | |
| Date: | 11/26/2024 | |
| Drawn By: | R.H. | |
| Checked By: | R.H. | |
| Revisions: | | |
| Rev. | Description | Date |
| 1 | ADDENDUM #1 | 2024.08.15 |
| 4 | ADDENDUM #4 | 2024.11.26 |

11/25/2024 11:40:42 A:\Autodesk Docs\G\Grand Junction Community Recreation Center\2023057_GJCR_C_ELEC_R24.rvt



LEGEND

WIRELESS ACCESS POINT.

TELECOM ROOM.

CAMERA (CCTV OR NOLA)

PANIC BUTTON

GENERAL NOTES

(THIS SHEET ONLY)

A.

REFER TO T001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY DRAWINGS.

B.

FOR ALL TELECOMMUNICATIONS DEVICES, PROVIDE A 1-GANG FACEPLATE IN COLOR PER THE ARCHITECT.

C.

FOR ALL TELECOMMUNICATIONS DEVICES, LOCATE THE DEVICE NEXT TO THE NEAREST ELECTRICAL RECEPTACLE AND MATCH THE MOUNTING HEIGHT (SEE THE ELECTRICAL DRAWINGS).

D.

ALL NEW TELECOM WIRING SHOWN ON THIS PLAN SHALL BE HOMERUN TO IDF 1403B.

KEY NOTES

1

NEW TELECOM RACK. SEE DIAGRAMS.

2

3/4" PLYWOOD BACKBOARD FROM FLOOR TO 8'-0" AFF FOR THE EXTENT OF THE LINE. PAINT TO MATCH ADJACENT SURFACES.

3

CABLE TRAY MOUNTED DIRECTLY ABOVE THE RACKS. SEE DIAGRAMS.

4

TELECOM GROUNDING BUS BAR.

5

PROVIDE (2) 4" CONDUITS THROUGH WALL. STI #E2PATH.

6

AV RACK SERVING THE GROUP FITNESS AREAS.

7

PROVIDE DOOR CONTACT APPROPRIATE FOR OVERHEAD DOOR AND CONNECT TO THE ACCESS CONTROL SYSTEM. SCHLAGE #674-0H.OAE. PROVIDE CARD READER TO OPERATE OVERHEAD DOOR SUCH THAT A VALID CARD OPENS/CLOSES DOOR.

8

EMERGENCY EXIT ONLY DOOR. PROVIDE CARD READER TO DISARM LOCAL SOUNDER. LOCAL SOUNDER INITIATED BY DOOR CONTACT WHEN DOOR IS OPENED. ALL DOOR HARDWARE BY DIVISION 08.

9

EXTERIOR MAINTENANCE GATE (SEE SITE PLAN FOR EXACT LOCATION). PROVIDE READER ON COURTYARD SIDE OF GATE TO DISARM LOCAL SOUNDER SUCH THAT A VALID CARD READ WILL NOT ALARM DOOR. PROVIDE THE REQUIRED UNDERGROUND CONDUIT INFRASTRUCTURE TO THE IDF ROOM FOR SIGNAL CABLEING.

10

MOUNT CAMERA TO THE TRACK STRUCTURE ABOVE.

11

MOUNT SPEAKERS TO STEEL COLUMN. CONFIRM MOUNTING HEIGHT WITH AV CONTRACTOR. PROVIDE CONDUIT TO RUN SPEAKER WIRING UNDERGROUND TO THE AV RACK.

12


PROVIDE VOLUME CONTROL STATION TO CONTROL THE OUTDOOR SPEAKERS FOR THE INCLUDED ZONE.

13

SEE DETAIL ON T800 SERIES DRAWINGS FOR MORE INFORMATION ON WALL MOUNTED MONITORS/DIGITAL SIGNAGE BOARDS. ALL ROUGH-IN AND AV COMPONENTS AND DEVICES SHALL BE PROVIDED AS BASE BID. MONITOR SHALL BE PROVIDED UNDER ALTERNATE #40.




14

PROVIDE A CLEAR, FLIP-UP, LOCKABLE COVER OVER BLUETOOTH PAIRING BUTTON.

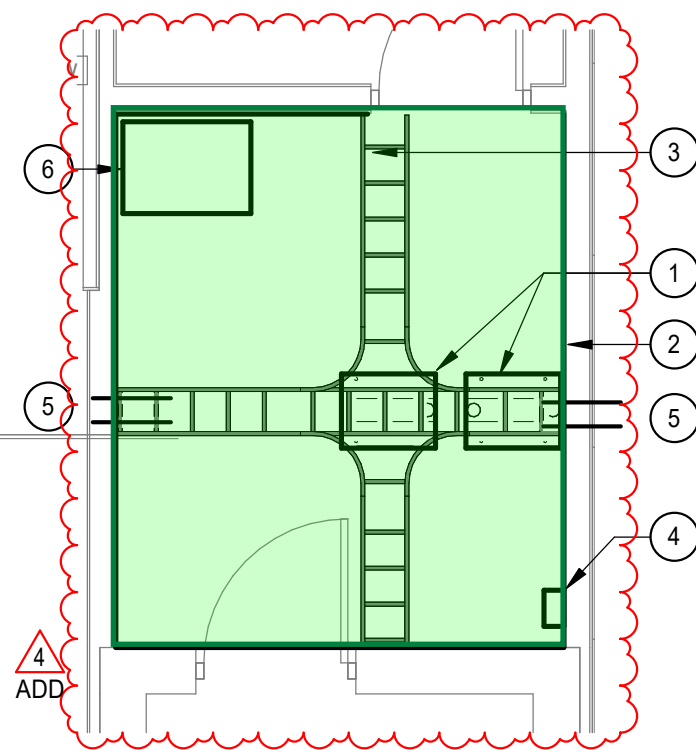


ENLARGED TECH PLAN
- IDF 1403B
SCALE: 1/4" = 1'-0"

FIRST FLOOR TECHNOLOGY PLAN - AREA 'D'
SCALE: 1/8" = 1'-0"

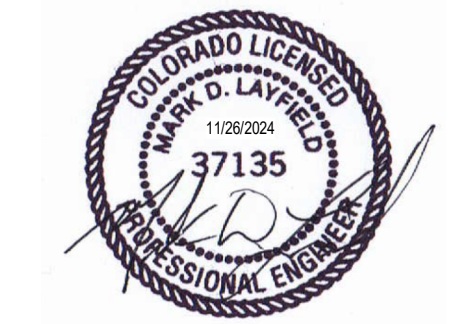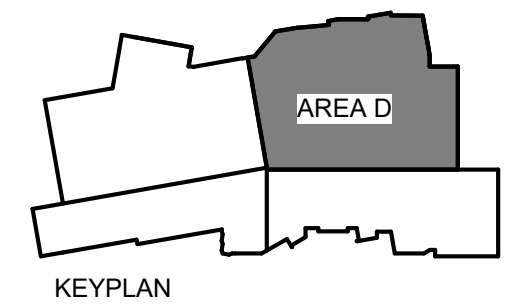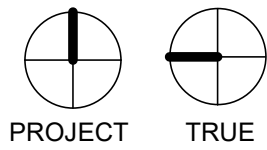

| | | |
|-----------------|-----------------|------------|
| Project Number: | 2023.042 | |
| Issue: | CONFORMANCE SET | |
| Date: | 11/26/2024 | |
| Drawn By: | R.H. | |
| Checked By: | R.H. | |
| Revisions: | | |
| Rev. | Description | Date: |
| 1 | ADDENDUM #1 | 2024.08.15 |
| 2 | ADDENDUM #2 | 2024.08.29 |
| 4 | ADDENDUM #4 | 2024.11.26 |

11/25/2024 11:41:08 A:\Autodesk Docs\Grand Junction Community Recreation Center\2023057_GJCRC_ELEC_R24.rvt

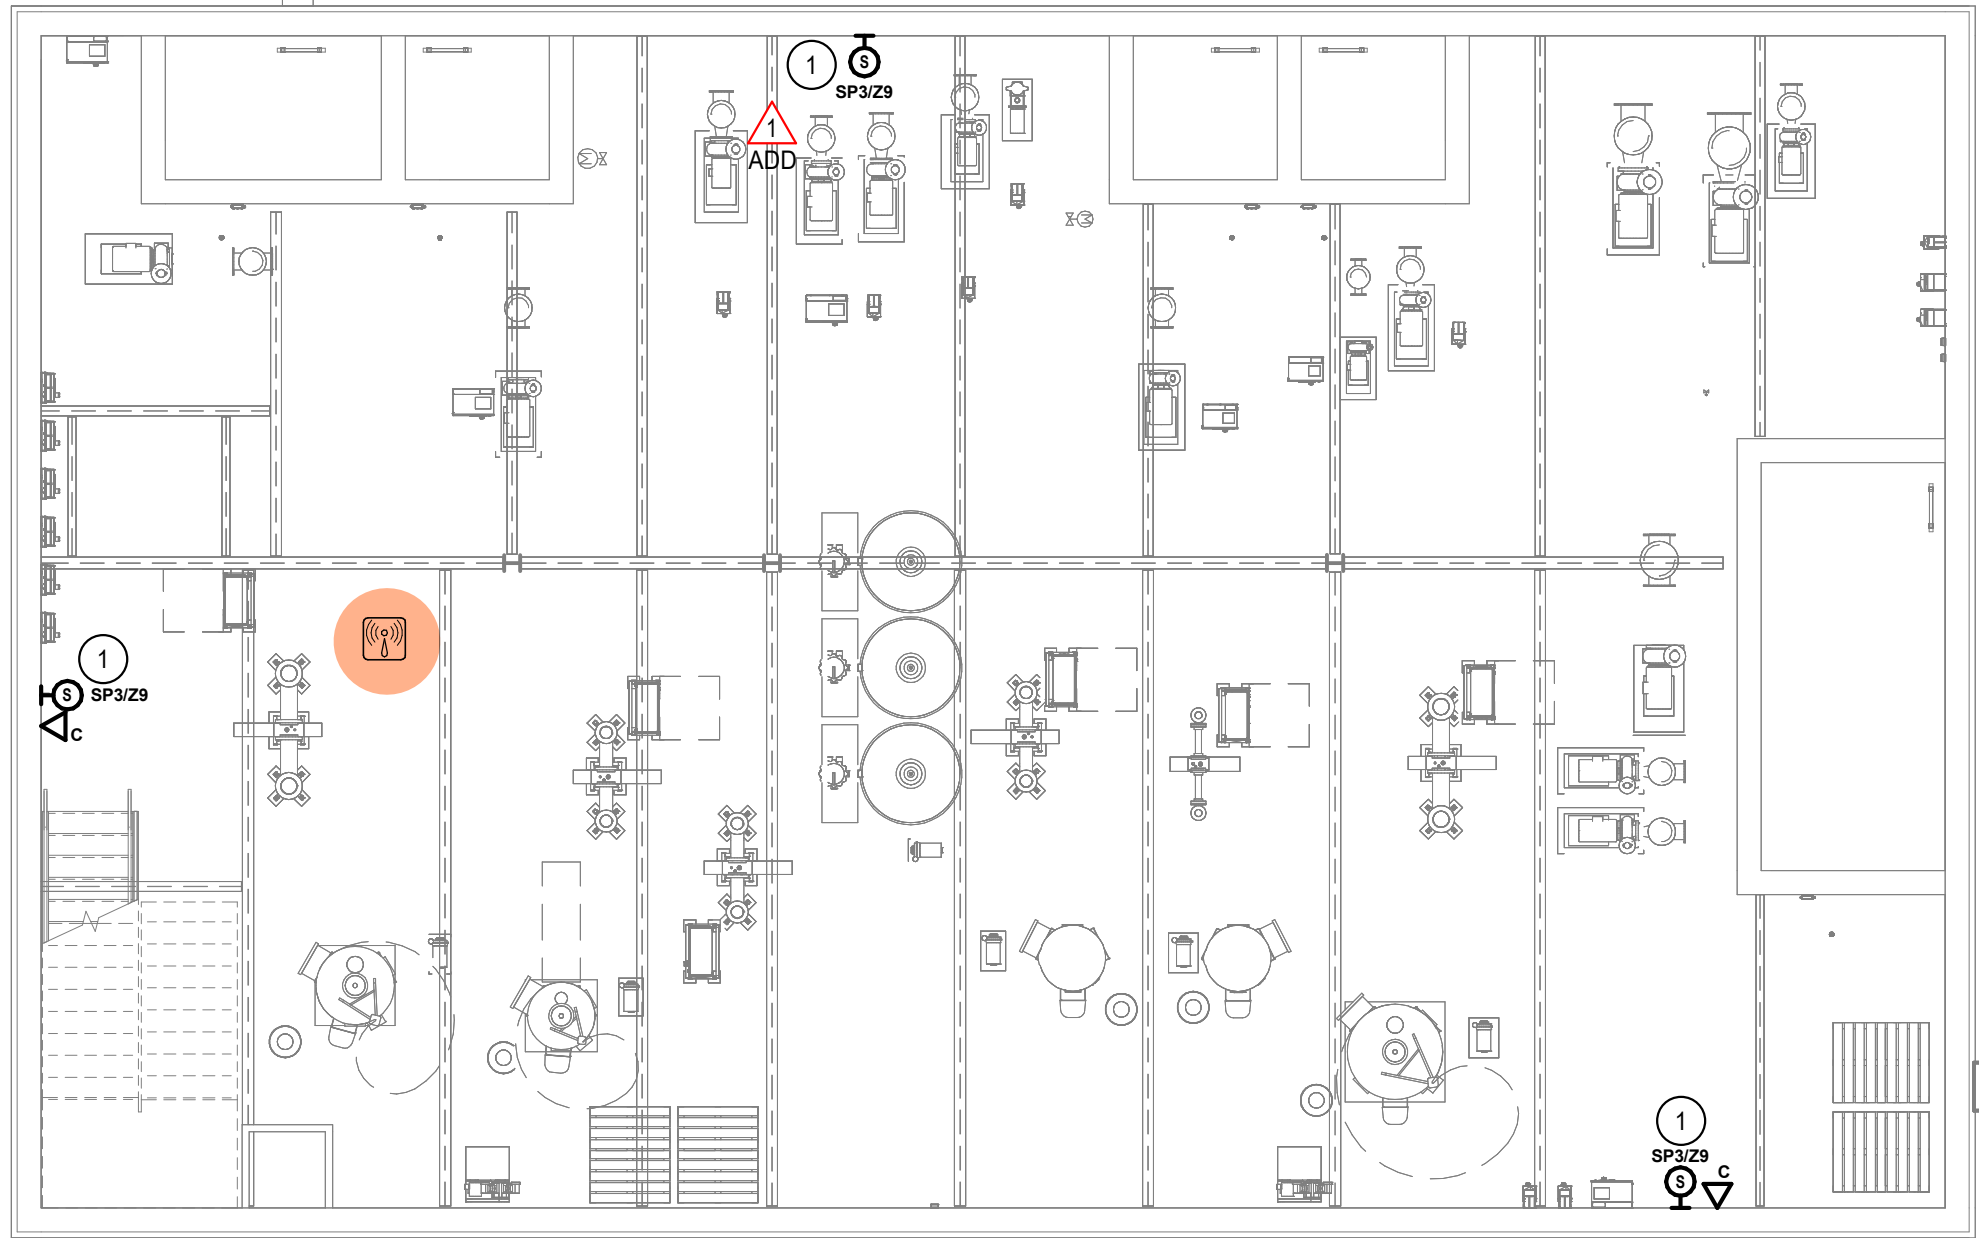

1 **POOL EQUIPMENT ROOM TECHNOLOGY PLAN**
T321 SCALE: 1/8" = 1'-0" PROJECT TRUE

LEGEND

- WIRELESS ACCESS POINT.
- TELECOM ROOM.
- CAMERA (CCTV OR NOLA)
- PANIC BUTTON

GENERAL NOTES (THIS SHEET ONLY)

- A. REFER TO T001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY DRAWINGS.
- B. FOR ALL TELECOMMUNICATIONS DEVICES, PROVIDE A 1-GANG FACEPLATE IN COLOR PER THE ARCHITECT.
- C. FOR ALL TELECOMMUNICATIONS DEVICES, LOCATE THE DEVICE NEXT TO THE NEAREST ELECTRICAL RECEPTACLE AND MATCH THE MOUNTING HEIGHT (SEE THE ELECTRICAL DRAWINGS).
- D. ALL NEW TELECOM WIRING SHOWN ON THIS PLAN SHALL BE HOMERUN TO IDF 1705.

KEY NOTES

- 1. COORDINATE EXACT PLACEMENT OF SPEAKER WITH EQUIPMENT BEING INSTALLED. DO NOT PLACE SPEAKER BEHIND ANY EQUIPMENT THAT WOULD NOT ALLOW IT TO BE HEARD IN THE SPACE.



Project Number: 2023.042
Issue: CONFORMANCE SET
Date: 11/26/2024
Drawn By: R.H.
Checked By: R.H.

| Revisions: | Rev. | Description | Date: |
|------------|------|-------------|------------|
| | 1 | ADDENDUM #1 | 2024.08.15 |

Sheet title:
POOL EQUIPMENT ROOM TECHNOLOGY
PLAN - AREA B

11/25/2024 11:41:28 A:\Autodesk Docs\G\Grand Junction Community Recreation Center\2023057_GJCRC_ELEC_R24.rvt



LEGEND

- WIRELESS ACCESS POINT.
- TELECOM ROOM.
- CAMERA (CCTV OR NOLA)
- PANIC BUTTON

GENERAL NOTES

(THIS SHEET ONLY)

- REFER TO T001 FOR GENERAL NOTES THAT APPLY TO ALL TECHNOLOGY DRAWINGS.
- FOR ALL TELECOMMUNICATIONS DEVICES, PROVIDE A 1-GANG FACEPLATE IN COLOR PER THE ARCHITECT.
- FOR ALL TELECOMMUNICATIONS DEVICES, LOCATE THE DEVICE NEXT TO THE NEAREST ELECTRICAL RECEPTACLE AND MATCH THE MOUNTING HEIGHT (SEE THE ELECTRICAL DRAWINGS).
- ALL NEW TELECOM WIRING SHOWN ON THIS PLAN SHALL BE HOMERUN TO IDF 1403B.

KEY NOTES

- EMERGENCY CALL FOR HELP BUTTON. SEE DIAGRAM.
- SEE DETAIL ON T800 SERIES DRAWINGS FOR MORE INFORMATION ON WALL MOUNTED MONITORS/DIGITAL SIGNAGE BOARDS.
- MOUNT WIRELESS ACCESS POINT TO THE UNDERSIDE OF THE BOTTOM OF THE STEEL TRUSS SYSTEM. COORDINATE WITH THE CITY AND ARCHITECT PRIOR TO ROUGH-IN.
- MOUNT SPEAKERS TO STRUCTURAL STEEL ABOVE. PROVIDE RIGGING THAT WILL SUPPORT THE SPECIFIED SPEAKERS. COORDINATE EXACT LOCATION WITH ARCHITECT.
- SOURCE AND VOLUME CONTROL STATION FOR THE FACILITY-WIDE PAGING AND BACKGROUND MUSIC (BGM) SYSTEM ZONE 19. LABEL ACCORDINGLY.
- MOUNT TELECOM OUTLETS IN SEPARATE TELECOM CHANNEL OF FLOOR-MOUNTED RACEWAY SYSTEM, IN SAME VICINITY AS ADJACENT RECEPTACLE. PROVIDE CONDUIT PATHWAY TO TELECOM ROOM ON LEVEL BELOW.

ADD

T322

MEZZANINE TECHNOLOGY PLAN - AREA 'D'

SCALE: 1/8" = 1'-0"

PROJECT

TRUE





BARKER
RINKER
SEACAT
ARCHITECTURE

brsarch.com



ENGINEERING TECHNOLOGY LIGHTING
reesehackman.com

GRAND JUNCTION COMMUNITY
RECREATION CENTER
GRAND JUNCTION, CO

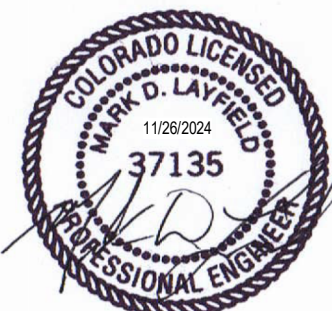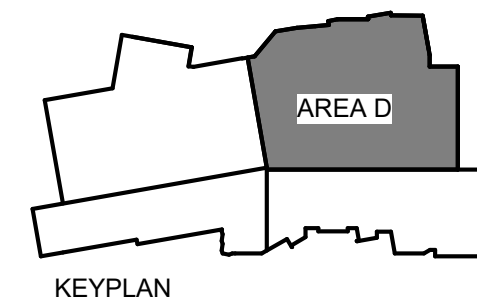

| | | |
|-----------------|-----------------|------------|
| Project Number: | 2023.042 | |
| Issue: | CONFORMANCE SET | |
| Date: | 11/26/2024 | |
| Drawn By: | R.H. | |
| Checked By: | R.H. | |
| Revisions: | | |
| Rev. | Description | Date |
| 1 | ADDENDUM #1 | 2024.08.15 |
| 2 | ADDENDUM #2 | 2024.08.29 |
| 4 | ADDENDUM #4 | 2024.11.26 |

Sheet title:
MEZZANINE TECHNOLOGY PLAN - AREA
'D'

T322
© 2017 Barker Rinker Seacat Architecture